



FOUNDATION PLAN (See Project Plans for Conduit Size)

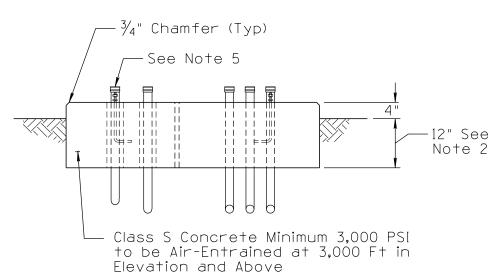

## FRONT VIEW

## NOTES:

- 1. All materials and construction shall conform to the requirements of the Specifications.
- 2. Unstable soil and/or steep slopes may require deeper foundations. See Specifications. Load centers shall not be located in drainage areas unless they are elevated.
- 3. For conduit size, location, and quantity, see plans. Typical minimum size is 2".
- 4. Anchor bolts shall be galvanized  $\frac{1}{2}$ " x 12" x 4" or 5" complete with nuts and washers. Anchor bolt projection above foundation shall be 1/2" Min to 2/2" Max.
- 5. Conduit projection above foundation shall be 2" Min to 4" Max. Conduits shall be capped.
- 6. Use an approved Silicon Sealer RTV Type, Grey in color or Clear, between cabinet and foundation.
- 7. In unpaved areas, a raised PCC pad  $36" \times 4" \times 37"$  shall be placed at the in front of the cabinet. Pad shall be set 2" below the foundation elevation and sloped away from cabinet for drainage (2% Min.).
- 8. Install one 2" conduit for future use, stubbed and capped 24" past the edge of the foundation, as directed by the Engineer.
- 9. 1" sleeve for ground rod.
- 10. Back side of foundation shall be increased by at least 5" when EUSERC Meter Socket or utility pull section and/or service disconnect enclosure are required. The 4" sleeves are for Service conduits. The contractor shall confirm serving utility's requirements and power drop location prior to construction.
- 11. Additional offset should be provided if available, or if clear zone requirements dictate. On high speed roadways, offset shall be 30' or more.

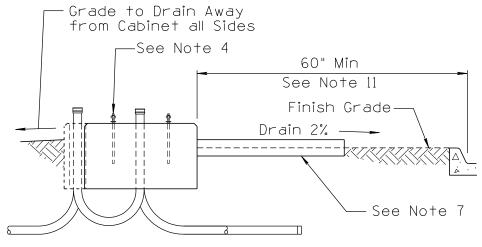

LEFT SIDE VIEW

ARIZONA DEPARTMENT OF TRANSPORTATION INTERMODAL TRANSPORTATION DIVISION TRAFFIC SIGNALS AND LIGHTING DESIGN APPROVED SIGNATURE STANDARD DRAWINGS APPROVED FOR FOUNDATION FOR TYPE IV ON FILE

LOAD CENTER CABINET

03/10

1 OF 1

T.S. 2-2

DRAWING NO.

NOT TO SCALE