


NOTES:

1. All materials and construction shall conform to the requirements of the Specifications.
2. Unstable soil may require deeper foundations. See Specifications.
3. For conduit size, location, and quantity, see plans.
4. Anchor bolts shall be galvanized $\frac{3}{4}$ " x 16" x 3" complete with nuts and washers.
5. Anchor bolt's projection above foundation shall be 2" min. $2\frac{1}{2}$ " max.
6. Conduit projection above foundation shall be 2" min. 4" max. between cabinet and foundation.
7. Use an approved Silicon Sealer RTV Type Grey in color or Clear, between cabinet and foundation.
8. In unpaved areas a raised PCC pad 36" x 4" x width of foundation, shall be placed in front of the cabinet. Pad shall be set 2" below the foundation elevation. Slope pad away from cabinet. See pad detail on T.S.2-1
9. All cabinet foundations shall have a $\frac{5}{8}$ " x 10' Bonded Copper Ground Rod.
10. Install 1-3" conduit for future use stubbed and capped 24" past the edge of the foundation as directed by the Engineer.
11. 1" sleeve (for ground rod) shall be inserted when foundation is poured. Install a $\frac{5}{8}$ " x 10' bonded copper ground rod with clamp.
12. 4" sleeves for Service conduits if EUSERC Meter Socket or EUSERC utility pull section and/or Service Disconnect enclosure are required.

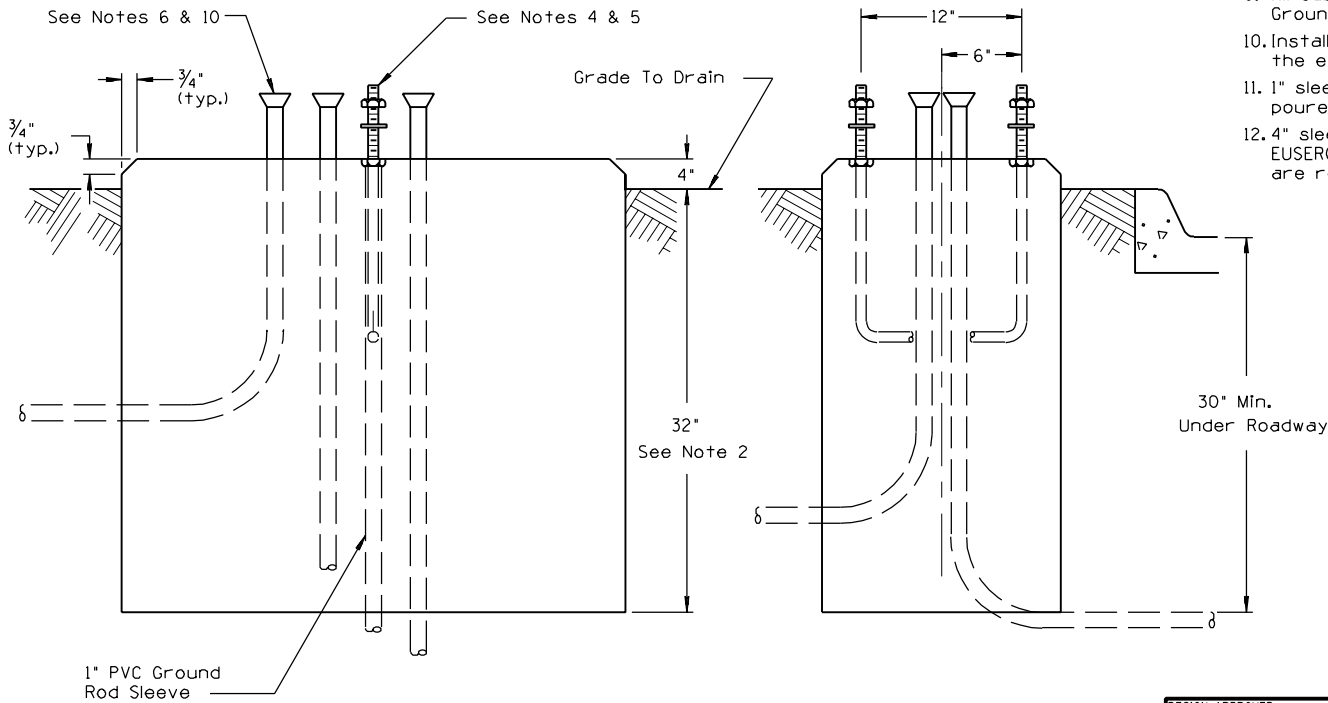

DESIGN APPROVED	SIGNATURE	ARIZONA DEPT. OF TRANSPORTATION INTERMODAL TRANSPORTATION DIVISION TRAFFIC SIGNALS & LIGHTING STANDARD DRAWINGS	REV.
APPROVED FOR DISTRIBUTION		FOUNDATION FOR TYPE III CONTROL CABINET	DRAWING NO. T.S. 2-3
ON FILE			