


MATERIAL LIST		
Itm.	Qu.	Description
1	2	8" Signal Section With Amber Lens
2	2	Tunnel Type Signal Visor — 8" Long (T.S. 8-2)
3	1	Backplate (T.S. 8-1-B)
4	1	Type III Mount (T.S. 9-2)
5	1	Standard 4" I.D. Pipe 27" Long
6	1	Post Foundation
7	4	Anchor Bolts (3/4" x 12" x 4") With 2 Nuts And 2 Washers Shall Be Furnished With Pole
8	1	Steel Base, 1/2" Min. Thickness

NOTES:

1. All materials and construction shall conform to the requirements of the Specifications.
2. Anchor bolts shall project 2 3/4" above the foundation.
3. Block out for leveling nuts.
4. Conduit shall project a minimum of 2" above the foundation. Maximum projection shall be 4".
5. A 25' coil of No. 4 AWG bare copper conductor shall be installed before the concrete is poured and connected to anchor bolt.

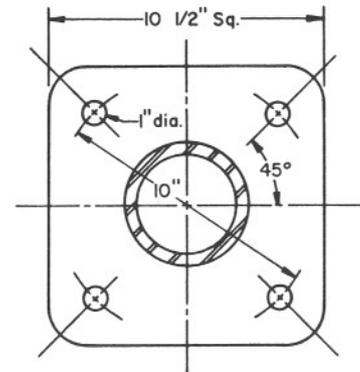

SECTION A-A

DESIGN APPROVED <i>Barlin Brown</i> 7/24/65	STATE OF ARIZONA DEPARTMENT OF TRANSPORTATION DIVISION OF HIGHWAYS STANDARD DRAWINGS	REV.
APPROVED FOR DISTRIBUTION <i>A. J. [Signature]</i>	POLE FLASHER	DRAWING NO. T.S. 12-1