
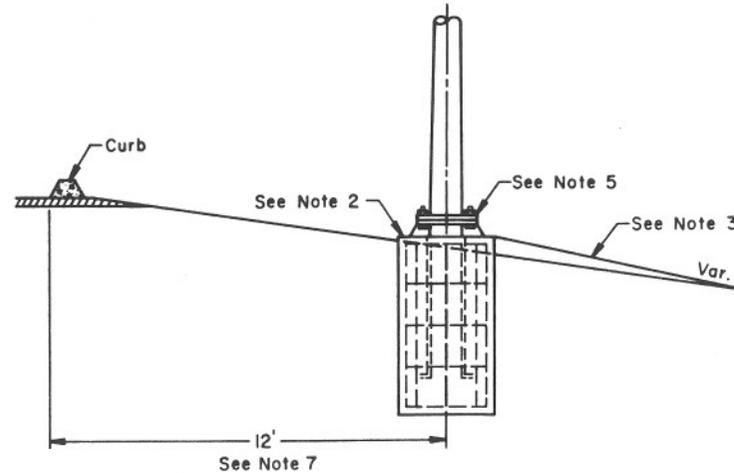
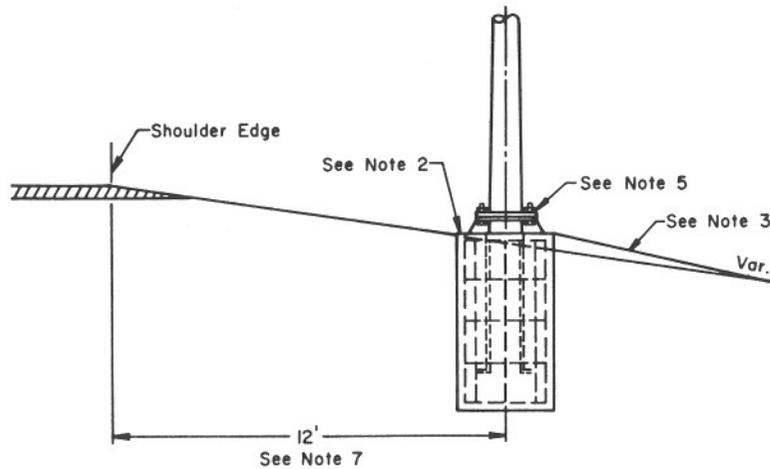
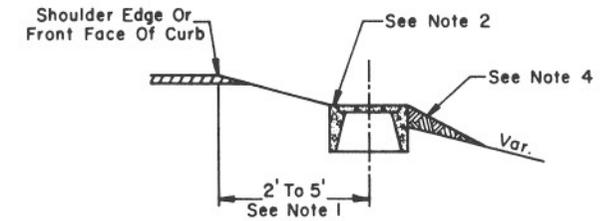
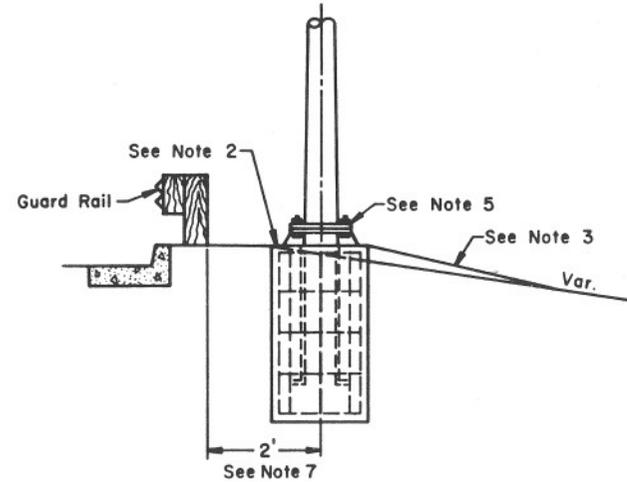


NOTES:

1. Dimensions for pull box locations are minimum requirements and may be varied to suit conditions as directed by the Engineer.
2. The top of Pole Foundations and pull boxes shall be flush with the finished grade.
3. Fill around Pole Foundations a minimum of 10' on three sides with topsoil or as directed by the Engineer.
4. Fill around pull boxes on three sides with topsoil or as directed by the Engineer.
5. For slip-away base details see T.S. 5-2 and T.S. 5-3.
6. Offset for break-away base identical to slip-away.
7. Offset dimension requirements may vary. See Pole Schedules on Project Plans.

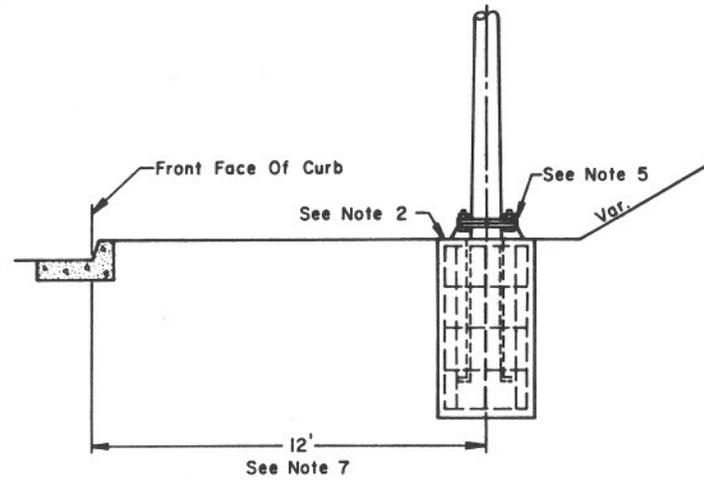

DESIGN APPROVED <i>Barbara Brown</i> 7/24/61	STATE OF ARIZONA DEPARTMENT OF TRANSPORTATION DIVISION OF HIGHWAYS STANDARD DRAWINGS	REV.
APPROVED FOR DISTRIBUTION <i>C. E. Hubbard</i>	HIGHWAY LIGHTING OFFSETS IN CUT AND FILL SECTIONS	DRAWING NO. T.S. 6-1