

ARIZONA DEPARTMENT OF TRANSPORTATION



ADVERTISEMENT FOR BIDS SPECIAL PROVISIONS BIDDERS DOCUMENTS

SUBMITTED BY:

(Company or Firm Name)

(Mailing Address)

(City)

(State)

(Zip Code)

(Street Address - If Different From Above)

(City)

(State)

(Zip Code)

Arizona Commercial License No. _____

License Classifications(s) _____

TRACS/Proj. No.:

0000 MA SRI SZ15501C CMAQ-SRI-0(202)T
SALT RIVER PIMA-MARICOPA INDIAN COMMUNITY
(Longmore Rd; McDowell Rd. - Osborn Rd.)

Contracts and Specifications Section
1651 West Jackson, Room 121F
Phoenix, Arizona 85007-3217

NOTICE

TO ALL BIDDERS

Read carefully the complete ADVERTISEMENT FOR BIDS and SECTION 102 - BIDDING REQUIREMENTS AND CONDITIONS in the Specifications. Important information is given in both documents which affects the acceptance of your bid proposal. Failure to comply may result in rejection of your bid.

Bids are to be prepared with black ink or typed and any alterations, initials or signatures must be in black ink.

Unit prices must be shown for each item of work in the Bidding Schedule, as well as, the extended bid amount. This applies to all items, including lump sum items.

If goals are established for participation by Disadvantaged Business Enterprises (DBE's), please read carefully the portion of the special provisions which addressed this subject. It is advisable to contact ADOT's Business Engagement and Compliance Office for assistance, particularly when bidding infrequently or for the first time.

It is **NOT** advisable to mail bid proposals. Proposals received in Contracts and Specifications Services, 1651 W. Jackson, Room 121F, Phoenix, Arizona 85007, after the designated time for opening will not be accepted regardless of the reason for not being received on time.

IMPORTANT

PRIOR TO SUBMITTING YOUR BID, PRINT
COMPANY NAME, ADDRESS, CITY, STATE, AND ZIP
IN THE SPACE PROVIDED ON THE COVER OF
YOUR PROPOSAL. PLEASE ENSURE THAT THIS
DATA IS THE SAME AS SHOWN ON THE BIDDING
DOCUMENTS.

ARIZONA DEPARTMENT OF TRANSPORTATION

ADVERTISEMENT FOR BIDS

BID OPENING: FRIDAY AUGUST 26, 2016 AT 11:00 A.M. (M.S.T.)

TRACS NO 0000 MA SRI SZ15501C
PROJ NO CMAQ-SRI-0(202)T
TERMINI SALT RIVER PIMA-MARICOPA INDIAN COMMUNITY
LOCATION LONGMORE RD; McDOWELL RD. – OSBORN RD.

ROUTE NO. MILEPOST DISTRICT ITEM NO.
N/A N/A CENTRAL LOCAL

The amount programmed for this contract is \$699,500. The location and description of the proposed work and the representative items and approximate quantities are as follows:

The proposed project is located in Maricopa County within the Salt River Pima-Maricopa Indian Community on Longmore Road beginning at McDowell Road and extending 1.5 miles north to Osborn Road, including approximately 300 feet east on Osborn Road. The work consists of grading shoulder ditch; installing driveway culverts; constructing concrete curb and gutter, driveways, and sidewalk; planting trees; installing decomposed granite; installing pedestrian solar lighting; and other related work.

REPRESENTATIVE ITEMS	UNIT	QUANTITY
Removal of Sidewalk, Driveway and Slabs	Sq.Ft.	1,435
Removal of Asphaltic Concrete Pavement	Sq.Yd.	1,705
Aggregate Base, Class 2	Cu.Yd.	337
Asphaltic Concrete (Misc. Structural)	Ton	494
Pipe, RCP (Class IV) (11" X 18")	L.Ft.	394
Pedestrian Lighting (Solar)	Each	9
Rock Mulch (Gradation C)	Sq.Yd.	5,870
Tree (5 Gallon)	Each	121
Landscaping Establishment	L.Sum	1
Concrete Sidewalk	Sq.Ft.	56,579
Concrete Driveway	Sq.Ft.	4,970
Concrete Sidewalk Ramp (Various Types)	Each	10
Construction Surveying and Layout	L.Sum	1

This project is located on a Native American Reservation, in the Salt River Pima-Maricopa Indian Community area, which may subject the contractor to the laws and regulations of the Salt River Pima-Maricopa Indian Community and its TERO office. Contractors are advised to make themselves aware of any taxes, fees or any conditions that may be imposed by the Salt River Pima-Maricopa Indian Community on work performed on the Reservation.

The time allowed for the completion of the work included in the Construction Phase of the contract will be **80** working days.

The time allowed for the completion of the work included in the Landscape Establishment Phase of the contract will be **90** calendar days.

The Arizona Department of Transportation, in accordance with the provisions of Title VI of the Civil Rights Act of 1964 (78 Stat. 252.42 U.S.C. §§ 2000d-4) and the Regulations, hereby notifies all bidders that it will affirmatively ensure that any contract entered into pursuant to this advertisement, **Disadvantaged Business Enterprises** will be afforded full and fair opportunity to submit bids in response to this invitation and will not be discriminated against on the grounds of race, color, or national origin in consideration for an award.

The minimum contract-specified goal for participation by Disadvantaged Business Enterprises in the work, as a percentage of the total amount bid, shall be 6.99.

Project plans, special provisions, and proposal pamphlets may be purchased in paper format from Contracts and Specifications Section, 1651 W. Jackson, Room 121F, Phoenix, AZ 85007-3217, (602) 712-7221. The cost is \$36, payable at time of order by cash, check, or money order. Please indicate whether a bid proposal package or a subcontractor/supplier set is desired. An additional fee of \$5 will be charged for each set of Special Provisions requested which is not accompanied by the purchase of a related set of project plans. Checks should be made payable to the Arizona Department of Transportation. We cannot guarantee mail delivery. No refund will be made for plans or specifications returned.

Contract documents and other project documents are available as electronic files, at no charge, from the Contracts and Specifications website, pursuant to Subsection 102.02 of the specifications. The Contracts and Specifications Current Advertisements website is located at:
<http://www.azdot.gov/business/ContractsandSpecifications/CurrentAdvertisements>.

Documents should be available within one week following the advertisement for bids.

This project is eligible for electronic bidding.

To submit a valid bid, the bidder must (1) have prequalification from the Department as necessary for the project, and (2) be included on the project Plansholder List as a Prime. The Application for Contractor Prequalification shall be filed at least 15 calendar days prior to the bid opening date. The Application may be obtained from the Contracts and Specifications website.

This contract is subject to the provisions of Arizona Revised Statutes Section 42-5075 -- Prime contracting classification; exemptions; definitions.

No award will be made to any contractor who is not a duly licensed contractor in accordance with Arizona Revised Statutes 32-1101 through 32-1170.03.

All labor employed on this project shall be paid in accordance with the minimum wage rates shown in the General Wage Decision. These rates have been determined in accordance with the requirements of the law and issued by the Secretary of Labor for this project. The wage scale is on file in Contracts and Specifications Section and copies may be obtained at all reasonable times.

A proposal guaranty in the form of either a certified or a cashier's check made payable to the State Treasurer of Arizona for not less than ten percent of the amount of the bid or in the form of a surety (bid) bond for ten percent of the amount of the bid shall accompany the proposal.

Surety (bid) bonds will be accepted only on the form provided by the Department and only from corporate sureties authorized to do business in Arizona.

Proposal pamphlets in paper format shall be submitted only in the envelope provided by the Department to:

Arizona Department of Transportation
Infrastructure Delivery and Operations Division
Contracts and Specifications Section
1651 West Jackson Street, Room 121F
Phoenix, Arizona 85007-3217

Sealed bids will be received until the hour indicated and then publicly opened and read. No bids will be received after the time specified.

Engineering Specialist:	Rimpal Shah	(602) 712-8377
Construction Supervisor:	Daniel Haskins	(602) 712-2302

STEVE BEASLEY,
Engineer-Manager
Contracts & Specifications Section

0000 MA SRI SZ15501C
CMAQ-SRI-0(202)T
06/29/2016

SPECIAL PROVISIONS

FOR

ARIZONA PROJECT

0000 MA SRP SZ155 01C

CMAQ-SRI-0(202)T

SALT RIVER PIMA-MARICOPA INDIAN COMMUNITY

LONGMORE ROAD; MCDOWELL ROAD TO OSBORN ROAD

PEDESTRIAN IMPROVEMENTS

PROPOSED WORK:

The proposed project is located in Maricopa County within the Salt River Pima-Maricopa Indian Community on Longmore Road beginning at McDowell Road and extending 1.5 miles north to Osborn Road, including approximately 300 feet east on Osborn Road. The work consists of grading shoulder ditch; installing driveway culverts; constructing concrete curb and gutter, driveways, and sidewalk; planting trees; installing decomposed granite; installing pedestrian solar lighting; and other related work.

Professional Registrant Seals:

This book of specifications and related contract documents represents the efforts of the following entities:

- (1) Engineering and Environmental Consultants, Inc. (EEC)
- (2) Wheat Design Group
- (3) Salt River Pima Maricopa Indian Community

A professional registrant of each entity has affixed their seal below which attests that those portions of these Specifications which relate to the drawing categories appearing after their seal were prepared under their direction.



EXP. 3/31/17

Drawing Categories:
Design Sheets, Typical Sections,
Summary Sheets, Special Details,
Geometric Sheets, Plan Sheets,
Erosion Control

Engineering and Environmental Consultants, Inc (EEC)



Exp. 6/30/19

Design Category:
Landscape Components

Wheat Design Group (WDG)



Expires 09/30/2016

Design Category:
Solar Street Lighting

Salt River Pima Maricopa Indian Community (SRPMIC)

(SPC00FA, 02/22/16)

SPECIFICATIONS:

The work embraced herein shall be performed in accordance with the requirements of the following separate documents:

Arizona Department of Transportation, Standard Specifications for Road and Bridge Construction, Edition of 2008 (Pub. # 31-066),

Arizona Department of Transportation, Intermodal Transportation Division, Standard Drawings, listed in the project plans, and available on the Department's website,

Arizona Department of Transportation, Traffic Group, Manual of Approved Signs, available on the Department's website,

Arizona Department of Transportation, Traffic Group, Traffic Control Design Guidelines, Edition of 2010, available on the Department's website,

Manual on Uniform Traffic Control Devices for Streets and Highways, 2009 edition and Arizona Supplement to the 2009 edition, dated January, 2012,

The Proposal Pamphlet and Non-bid Pamphlet which include the following documents:

These Special Provisions,

Appendix A – Subgrade Acceptance Chart

List of Subcontractors, Suppliers, Service Providers and Manufacturers Bidding ADOT Contracts, dated 9/23/10,

Required Contract Provisions Federal-Aid Construction Contracts (Form FHWA 1273 Revised May 1, 2012),

Standard Federal Equal Employment Opportunity Construction Contract Specifications (Executive Order 11246), July 1, 1978, Revised November 3, 1980 and Revised April 15, 1981,

Title VI / Non-Discrimination Assurances,

Appendix A
Appendix E,

Notice of Requirement for Affirmative Action to Ensure Equal Employment Opportunity (Executive Order 11246), July 1, 1978, Revised November 3, 1980 and Revised April 15, 1981,

Equal Employment Opportunity Compliance Reports, Federal-Aid Projects, February 1, 1977, Revised July 1, 1978, Revised November 3, 1980, Revised April 15, 1981,

Revised September 7, 1983, Revised October 15, 1998, Revised January 1, 2005,
Revised August 1, 2005, and Revised March 1, 2015,

Wage Determination Decision,

Bidding Schedule,

Included in the Proposal Pamphlet only:

Proposal,

Surety (Bid) Bond, 12-1303,

Certification With Regard to the Performance of Previous Contracts or Subcontracts
Subject to the Equal Opportunity Clause and the Filing of Required Reports, Federal
Aid Projects, April, 1969, Rev. July, 2003,

Certification With Respect to the Receipt of Addenda,

Affidavit Disadvantaged Business Enterprises,

BID SUBMISSION:

In submitting a bid, the holder of a Bid Proposal Pamphlet shall completely execute the following documents:

Proposal,

Bidding Schedule,

Surety (Bid) Bond, 12-1303,

Certification With Regard to the Performance of Previous Contracts or Subcontracts
Subject to the Equal Opportunity Clause and the Filing of Required Reports, Federal
Aid Projects, April, 1969, Rev. July, 2003, and

Certification With Respect to the Receipt of Addenda.

Affidavit Disadvantaged Business Enterprises.

PROPOSAL GUARANTY:

Each bidder is advised to satisfy itself as to the character and the amount of the proposal guaranty required in the Advertisement for Bids.

CONTRACT DOCUMENTS:

The bidder to whom an award is made will be required to execute a Performance Bond and a Payment Bond, each in 100 percent of the amount of the bid, an Insurance Certificate and the Contract Agreement.

A copy of these documents is not included in the Proposal Pamphlet which is furnished to prospective bidders; however, each bidder shall satisfy itself as to the requirements of each document.

The documents, approved by the Department of Transportation, Highways Division, are identified as follows:

Statutory Performance Bond, 12-1301, September, 1992

Statutory Payment Bond, 12-1302, September, 1992

Contract Agreement, 12-0912, August, 2000

Certificate of Insurance, 12-0100, June, 1998

A copy of each document may be obtained by making a request to Contracts and Specifications Services.

COPIES OF PROJECT DOCUMENTS:

Distribution of a limited number of plans and Special Provisions will be made to the successful low bidder, at no charge, following confirmation of bid prices and DBE submittal, if applicable. The distribution will be made on the following basis:

Contract Size (Dollars)	Full Size Plans	1/2 Size Plans	Bound Bid Books	Unbound Bid Books
\$0 - \$20,000,000	2	10	5	10
over \$20,000,000	5	20	5	20

These plans and Special Provisions will be set aside and designated for use by the low bidder along with an equal number held in reserve for the responsible District Office.

Any additional plans or Special Provisions that the low bidder may require beyond the above distribution will be available at the invoice cost of printing by ordering through the Engineer.

MATERIAL AND SITE INFORMATION:

Projects requiring materials, excavation, or site investigation may have additional information available concerning the material investigations of the project site and adjacent projects. This information, when available and applicable, may be examined in the Office of

the Bridge Group-Geotechnical Section, located at 1221 N. 21st Avenue, Phoenix, Arizona 85009-3740. The contractor may contact Bridge Group at (602) 712-7481 to schedule an appointment to examine the information. This information will not be attached to the contract documents. Copies of available information may be purchased by prospective bidders.

(EPRISE, 03/15/11)

DISADVANTAGED BUSINESS ENTERPRISES:

1.0 Policy:

The Arizona Department of Transportation (hereinafter the Department) has established a Disadvantaged Business Enterprise (DBE) program in accordance with the regulations of the U.S. Department of Transportation (USDOT), 49 CFR Part 26. The Department has received Federal financial assistance from the U.S. Department of Transportation and as a condition of receiving this assistance, the Department has signed an assurance that it will comply with 49 CFR Part 26.

It is the policy of the Department to ensure that DBEs, as defined in Part 26, have an equal opportunity to receive and participate in USDOT-assisted contracts. It is also the policy of the Department:

1. To ensure nondiscrimination in the award and administration of USDOT-assisted contracts;
2. To create a level playing field on which DBEs can compete fairly for USDOT-assisted contracts;
3. To ensure that the DBE program is narrowly tailored in accordance with applicable law;
4. To ensure that only firms that fully meet 49 CFR Part 26 eligibility standards are counted as DBEs;
5. To help remove barriers to the participation of DBEs in USDOT-assisted contracts; and
6. To assist in the development of firms that can compete successfully in the market place outside the DBE program.

2.0 Assurances of Non-Discrimination:

The contractor, subrecipient, or subcontractor shall not discriminate on the basis of race, color, sex or national origin in the performance of this contract. The contractor shall carry out applicable requirements of 49 CFR Part 26 in the award and administration of contracts. Failure by the contractor to carry out these requirements is a material breach of this contract, which may result in the termination of this contract or such other remedy as the state deems appropriate. The contractor, subrecipient, or subcontractor shall ensure that all subcontract agreements contain this non-discrimination assurance.

3.0 Definitions:

(A) Disadvantaged Business Enterprise (DBE): a for-profit small business concern which meets both of the following requirements:

- (1) Is at least 51 percent owned by one or more socially and economically disadvantaged individuals or, in the case of any publicly owned business, at least 51 percent of the stock is owned by one or more such individuals; and,
- (2) Whose management and daily business operations are controlled by one or more of the socially and economically disadvantaged individuals who own it.

(B) Socially and Economically Disadvantaged Individuals: any individual who is a citizen (or lawfully admitted permanent resident) of the United States and who is:

- (1) Any individual who is found to be a socially and economically disadvantaged individual on a case-by-case basis.
- (2) Any individual in the following groups, members of which are rebuttably presumed to be socially and economically disadvantaged:
 - (i) "Black Americans," which includes persons having origins in any of the Black racial groups of Africa;
 - (ii) "Hispanic Americans," which includes persons of Mexican, Puerto Rican, Cuban, Central or South American, or other Spanish or Portuguese culture or origin, regardless of race;
 - (iii) "Native Americans," which includes persons who are American Indians, Eskimos, Aleuts, or Native Hawaiians;
 - (iv) "Asian-Pacific Americans," which includes persons whose origins are from Japan, China, Taiwan, Korea, Burma (Myanmar), Vietnam, Laos, Cambodia (Kampuchea), Thailand, Malaysia, Indonesia, the Philippines, Brunei, Samoa, Guam, the U.S. Trust Territories of the Pacific Islands (Republic of Palau), the Commonwealth of the Northern Marianas Islands, Macao, Fiji, Tonga, Kiribati, Tuvalu, Nauru, Federated States of Micronesia, or Hong Kong;
 - (v) "Subcontinent Asian Americans," which includes persons whose origins are from India, Pakistan, Bangladesh, Bhutan, the Maldives Islands, Nepal or Sri Lanka;
 - (vi) "Women;"
 - (vii) Any additional groups whose members are designated as socially and economically disadvantaged by the Small Business Administration (SBA), at such time as the SBA designation becomes effective.

- (C) Joint Venture:** an association of a DBE firm and one or more other firms to carry out a single, for-profit business enterprise, for which parties combine their property, capital, efforts, skills and knowledge, and in which the DBE is responsible for a distinct, clearly defined portion of the work of the contract and whose share in the capital contribution, control, management, risks, and profits of the joint venture are commensurate with its ownership interest.
- (D) Non-DBE:** any firm that is not a DBE.
- (E) RACE-CONSCIOUS:** a measure or program is one that is focused specifically on assisting only DBEs, including women-owned DBEs.
- (F) RACE-NEUTRAL:** a measure or program is one that is, or can be, used to assist all small businesses. For the purposes of this part, race-neutral includes gender-neutrality.

4.0 Working with DBEs:

The Department works with DBEs and assists them in their efforts to participate in the highway construction program. All bidders should contact the Civil Rights Office at the address shown below for assistance in their efforts to use DBEs in the construction program of the Department:

Arizona Department of Transportation
Civil Rights Office
1135 N. 22nd Avenue (second floor), Mail Drop 154A
Phoenix, AZ 85009
Phone (602) 712-7761
FAX (602) 712-8429

5.0 Applicability:

The Department has established an overall annual goal for DBE participation on Federal-aid contracts. The Department intends for the goal to be met with a combination of race conscious efforts and race neutral efforts. Race conscious participation occurs where the contractor uses a percentage of DBEs, as defined herein, to meet the contract-specified goal. Race neutral efforts are those that are, or can be, used to assist all small businesses or increase opportunities for all small businesses. The regulation, 49 CFR 26, defines race neutral as when a DBE wins a prime contract, is awarded a subcontract on a project without DBE goals, and is awarded a subcontract from a prime contractor that did not consider the firm's DBE status.

The contractor shall meet the goal specified herein with DBEs, or establish that it was unable to meet the goal despite making good faith efforts to do so. Prime contractors are encouraged to obtain DBE participation above and beyond any goals that may be set for this project.

The provisions are applicable to all bidders including DBE bidders.

6.0 Certification:

Certification as a DBE shall be predicated on:

- (1) The completion and execution of an application for certification as a "Disadvantaged Business Enterprise".
- (2) The submission of documents pertaining to the firm(s) as stated in the application(s), including but not limited to a statement of social disadvantage and a personal financial statement.
- (3) The submission of any additional information which the Department may require to determine the firm's eligibility to participate in the DBE program.
- (4) The information obtained during the on-site visits to the offices of the firm and to active job-sites.

Applications for certification may be filed with the Department at any time. Both hardcopy submission and online submission is available.

For hardcopy submissions, applications for certification are available at the Department's Civil Rights Office, 1135 N. 22nd Avenue (second floor), mail drop 154A, Phoenix, Arizona 85009, phone (602) 712-7761. Hardcopy applications may also be obtained through the internet at www.azdbe.org. Hardcopy applications must be filed through the Civil Rights Office at the above address.

For online submissions, the online application process may be accessed through the internet at www.azdbe.org.

DBE firms and firms seeking DBE certification shall cooperate fully with requests for information relevant to the certification process. Failure or refusal to provide such information is a ground for denial or removal of certification.

Arizona is a member of the AZ Unified Certification Program (AZUCP). Only DBE firms that are certified by the AZUCP are eligible for credit on ADOT projects. A list of DBE firms certified by AZUCP is available on the internet at www.azdbe.org. The list will indicate contact information and specialty for each DBE firm, and may be sorted in a variety of ways. However, ADOT does not guarantee the accuracy and/or completeness of this information, nor does ADOT represent that any licenses or registrations are appropriate for the work to be done.

The Department's certification is not a representation of qualifications and/or abilities. The contractor bears all risks that the firm may not be able to perform its work for any reason.

7.0 General:

Each contractor shall establish a program that will ensure nondiscrimination in the award and administration of contracts and subcontracts.

Each contractor shall also designate a full time employee who shall be responsible for the administration of the contractor's DBE program.

Agreements between the bidder and a DBE in which the DBE promises not to provide subcontracting quotations to other bidders are prohibited.

8.0 DBE Subcontractor Payment Reporting:

The Department is required to collect data on DBE and non-DBE participation to report to FHWA on Federal-aid projects. The contractor is notified that such record keeping is required by the Department for tracking DBE participation.

The contractor shall submit a report on a monthly basis indicating the amounts earned by and paid to all DBEs and non-DBEs working on the project. In addition, the contractor shall require that all DBE and non-DBE subcontractors verify receipt of payment.

The contractor shall provide all such required information for the current month by the 5th of the following month. The required information shall be submitted electronically through the Department's web-based payment tracking system (<https://adot.dbesystem.com>).

9.0 Goals:

The minimum goal for participation by DBEs on this project is as follows:

6.99 Percent

The percentage of DBE participation shall be based on the total bid.

10.0 Crediting DBE Participation Toward Meeting Goals:

10.01 General Requirements:

Only the value of the work actually performed by the DBE can be credited toward DBE participation. Credit towards the contractor's DBE goal is given only after the DBE has been paid for the work performed.

The contractor bears the responsibility to determine whether the DBE possesses the proper contractor's license(s) to perform the work. If a DBE cannot complete its work due to failure to obtain or maintain its licensing, the contractor bears the responsibility to immediately request approval to replace the DBE with another DBE and notify the Engineer and the Civil Rights Office.

The Department's certification is not a representation of qualifications and/or abilities. The contractor bears all risks that the DBE may not be able to perform its work for any reason.

A DBE may participate as a prime contractor, subcontractor, joint venture partner with either a prime contractor or a subcontractor, or as a vendor of materials or supplies. A DBE joint

venture partner shall be responsible for a clearly defined portion of the work to be performed, in addition to meeting the requirements for ownership and control.

The dollar amount of work to be accomplished by DBEs, including partial amount of a lump sum or other similar item, shall be on the basis of subcontract, purchase order, hourly rate, rate per ton, etc., as agreed to between parties.

With the exception of bond premiums, all work must be attributed to specific bid items. Where work applies to several items, the DBE contracting arrangement must specify unit price and amount attributable to each bid item. DBE credit for any individual item of work performed by the DBE shall be the lesser of the amount to be paid to the DBE or the prime contractor's bid price. If the amount bid by the DBE on any item exceeds the prime contractor's bid amount, the prime contractor may not obtain credit by attributing the excess to other items.

Where more than one DBE is engaged to perform parts of an item (for example, supply and installation), the total amount payable to the DBEs will not be considered in excess of the prime contractor's bid amount for that item.

Bond premiums may be stated separately, so long as the arrangement between the prime contractor and the DBE provides for separate payment not to exceed the price charged by the bonding company.

DBE credit may be obtained only for specific work done for the project, supply of equipment specifically for physical work on the project, or supply of materials to be incorporated in the work. DBE credit will not be allowed for costs such as overhead items, capital expenditures (for example, purchase of equipment), and office items.

If a DBE performs part of an item (for example, installation of materials purchased by a Non-DBE), the DBE credit shall not exceed the lesser of (1) the DBE's contract or (2) the prime contractor's bid for the item, less a reasonable deduction for the portion performed by the Non-DBE.

When a DBE performs as a partner in a joint venture, only that portion of the total dollar value of the contract which is clearly and distinctly performed by the DBE's own forces can be credited toward the DBE goal.

The contractor may credit second-tier subcontracts issued to DBEs by non-DBE subcontractors. Any second-tier subcontract to a DBE used to meet the goal must meet the requirements of a first-tier DBE subcontract.

All DBE and non-DBE subcontracting activity must be reported by the contractor and counted toward participation. This includes lower-tier subcontracting regardless of whether or not the DBE is under contract with another DBE.

DBE prime contractors must meet the DBE participation goal or demonstrate good faith efforts. This is determined by counting the work the DBE has committed to performing with its own forces, as well as the work that it has committed to be performed by DBE subcontractors and DBE suppliers.

A prime contractor may credit the entire amount of that portion of a construction contract that is performed by the DBE's own forces. The cost of supplies and materials obtained by the DBE for the work of the contract can be included so long as that cost is reasonable. Leased equipment may also be included. No credit is permitted for supplies purchased or equipment leased from the prime contractor or its affiliate(s).

When a DBE subcontracts a part of the work of its contract to another firm, the value of the subcontract may be credited towards the DBE goal only if the DBE's subcontractor is itself a DBE and performs the work with its own forces. Work that a DBE subcontracts to a non-DBE firm does not count toward a DBE goal.

A prime contractor may credit the entire amount of fees or commissions charged by a DBE firm for providing a bona fide service, such as professional, technical, consultant, or managerial services, or for providing bonds or insurance specifically required for the performance of a USDOT-assisted contract, provided the fees are reasonable and not excessive as compared with fees customarily allowed for similar services.

10.02 Police Officers:

DBE credit will not be permitted for procuring DPS officers. For projects on which officers from other agencies are supplied, DBE credit will be given only for the broker fees charged, and will not include amounts paid to the officers. The broker fees must be reasonable.

10.03 Commercially Useful Function:

As a prime contractor, a DBE shall perform a significant portion of the contract work with its own work force in accordance with normal industry practices and Subsection 108.01 - Subletting of Contract of the Standard Specifications.

A prime contractor can credit expenditures to a DBE subcontractor toward DBE goals only if the DBE performs a commercially useful function on the contract. A DBE performs a commercially useful function when it is responsible for execution of the work of a contract and is carrying out its responsibilities by actually performing, managing, and supervising the work involved. To perform a commercially useful function, the DBE must also be responsible, with respect to materials and supplies on the contract, for negotiating price, determining quality and quantity, ordering the material, and installing (where applicable) and paying for the material itself. To determine whether a DBE is performing a commercially useful function, the Department will evaluate the amount of work subcontracted, industry practices, whether the amount the firm is to be paid under the contract is commensurate with the work it is actually performing and the DBE credit claimed for its performance of the work, and other relevant factors.

A DBE will not be considered to perform a commercially useful function if its role is limited to that of an extra participant in a transaction, contract, or project through which funds are passed in order to obtain the appearance of DBE participation. In determining whether a DBE is such an extra participant, the Department will examine similar transactions, particularly those in which DBEs do not participate.

If a DBE does not perform or exercise responsibility for at least 30 percent of the total cost of its contract with its own work force, or if the DBE subcontracts a greater portion of the work of a contract than would be expected on the basis of normal industry practice for the type of work involved, the Department will presume that the DBE is not performing a commercially useful function.

When a DBE is presumed not to be performing a commercially useful function as provided above, the DBE may present evidence to rebut this presumption. Decisions on commercially useful function matters are subject to review by FHWA, but are not administratively appealable to U.S. DOT.

10.04 Trucking:

The Department will use the following factors in determining whether a DBE trucking company is performing a commercially useful function. The DBE must be responsible for the management and supervision of the entire trucking operation for which it is responsible on a particular contract, and there cannot be a contrived arrangement for the purpose of meeting DBE goals.

The DBE must itself own and operate at least one fully licensed, insured, and operational truck used on the contract on every day that credit is to be given for trucking.

The contractor will receive credit for the total value of transportation services provided by the DBE using trucks it owns, insures and operates, and using drivers it employs.

The DBE may lease trucks from another DBE firm, including an owner-operator who is certified as a DBE. The DBE who leases trucks from another DBE receives credit for the total value of the transportation services.

The DBE may also lease trucks from a non-DBE firm, including an owner-operator. The DBE who leases trucks from a non-DBE is entitled to credit for the total value of the transportation services provided by non-DBE lessees not to exceed the value of transportation services provided by DBE-owned trucks on the contract. Additional participation by non-DBE lessees results in credit only for the fee or commission paid to the DBE as a result of the lease agreement.

Example: DBE Firm X uses two of its own trucks on contract. It leases two trucks from DBE Firm Y and six trucks from non-DBE firm Z. DBE credit would only be awarded for the total value of transportation services provided by Firm X and Firm Y, and may also be awarded for the total value of transportation services provided by four of the six trucks provided by Firm Z. In all, full credit would be allowed for the participation of eight trucks. With respect to the other two trucks provided by Firm Z, DBE credit could be awarded only for the fees or commissions pertaining to those trucks Firm X receives as a result of the lease with Firm Z.

10.05 Materials and Supplies:

The Department will credit expenditures with DBEs for material and supplies towards the DBE goal as follows. If the materials or supplies are obtained from a DBE manufacturer, 100 percent of the cost of the materials or supplies is credited. A manufacturer is defined as

a firm that operates or maintains a factory or establishment that produces, on the premises, the materials, supplies, articles, or equipment required under the contract, and of the general character described by the specifications.

If the materials or supplies are purchased from a DBE regular dealer, 60 percent of the cost of the materials or supplies is credited. A DBE regular dealer is defined as a firm that owns, operates, or maintains a store or warehouse or other establishment in which the materials, supplies, articles, or equipment of the general character described by the specifications and required under the contract are bought, kept in stock, and regularly sold or leased to the public in the usual course of business. To be a regular dealer, the firm must be an established, regular business that engages, as its principal business and under its own name, in the purchase and sale or lease of the products in question. A firm may be a DBE regular dealer in such bulk items as petroleum products, steel, cement, stone or asphalt without owning, operating, or maintaining a place of business, as provided above, if the person both owns and operates distribution equipment for the products. Any supplementing of regular dealers' own distribution equipment shall be by a long-term lease agreement, and not on an ad-hoc or contract-by-contract basis. Packagers, brokers, manufacturers' representatives, or other persons who arrange or expedite transactions are not regular dealers within the meaning of this paragraph and the paragraph above.

With respect to materials or supplies purchased from a DBE which is neither a manufacturer nor a regular dealer, the Department will credit the entire amount of the fees or commissions charged by the DBE for assistance in the procurement of the materials and supplies, or fees or transportation charges for the delivery of materials or supplies required on a job site, toward DBE goals, provided the fees are determined to be reasonable and not excessive as compared with fees customarily allowed for similar services. The cost of the materials and supplies themselves may not be counted toward the DBE goal.

DBE credit for supplying paving grade asphalt and other asphalt products will only be permitted for standard industry hauling costs, and only if the DBE is owner or lessee of the equipment and trucks. Leases for trucks must be long term (extending for a fixed time period and not related to time for contract performance) and must include all attendant responsibilities such as insurance, titling, hazardous waste requirements, and payment of drivers.

11.0 Joint Checks:

11.01 Requirements:

A DBE subcontractor and a material supplier (or equipment supplier) may request permission for the use of joint checks for payments from the prime contractor to the DBE subcontractor and the supplier. Joint checks may be issued only if all the conditions in this subsection are met.

1. The DBE subcontractor must be independent from the prime contractor and the supplier, and must perform a commercially useful function. The DBE subcontractor must be responsible for negotiating the price of the material, determining quality and quantity, ordering the materials, installing (where applicable), and paying for the

material. The DBE subcontractor may not be utilized as an extra participant in a transaction, contract, or project in order to obtain the appearance of DBE participation.

2. The use of joint checks will be allowed only if the prime contractor, DBE subcontractor, and material supplier establish that the use of joint checks in similar transactions is a commonly recognized business practice in the industry, particularly with respect to similar transactions in which DBE's do not participate.
3. A material or supply contract may not bear an excessive ratio relative to the DBE subcontractor's normal capacity.
4. There may not be any exclusive arrangement between one prime and one DBE in the use of joint checks that may bring into question whether the DBE is independent of the prime contractor.
5. Any arrangement for joint checks must be in writing, and for a specific term (for example, one year, or a specified number of months) that does not exceed a reasonable time to establish a suitable credit line with the supplier.
6. The prime contractor may act solely as the payer of the joint check, and may not have responsibility for establishing the terms of the agreement between the DBE subcontractor and the supplier.
7. The DBE must be responsible for receiving the check from the prime contractor and delivering the check to the supplier.
8. The prime contractor cannot require the DBE subcontractor to use a specific supplier, and the prime contractor may not participate in the negotiation of unit prices between the DBE subcontractor and the supplier.

11.02 Procedure and Compliance:

1. The Civil Rights Office must approve the agreement for the use of joint checks in writing.
2. After obtaining authorization for the use of joint checks, the prime contractor, the DBE, and the supplier must retain documentation to allow for efficient monitoring of the agreement.
3. Copies of canceled checks must be submitted with the payment information for the period in which the joint check was issued. Certificates of payment must indicate whether or not joint checks were used.
4. The prime contractor, DBE, and supplier each have an independent duty to report to the Department in the case of any change from the approved joint check arrangement.

5. Any failure to comply will be considered by the Department to be a material breach of this contract and will subject the prime contractor, DBE, and supplier to contract remedies and, in the case of serious violations, a potential for termination of the contract, reduction or loss of prequalification, debarment, or other remedies which may prevent future participation by the offending party.

12.0 Submission with Bids:

All bidders are required to certify in their bid proposal on the "Disadvantaged Business Enterprise Assurances" certificate either:

- (1) The established goal for DBE participation has been met and arrangements have been made at the time of bid with certified DBEs or
- (2) The bidder has been unable to meet the goal prior to the submission of the bid and has made good faith efforts to do so.

BIDS SUBMITTED WITH ALTERED, INCOMPLETE, OR UNSIGNED CERTIFICATES WILL BE CONSIDERED NON-RESPONSIVE.

Certifications on forms other than those furnished by the Department will be considered non-responsive.

13.0 Bidder Meeting DBE Goal:

13.01 General:

If the bidder indicates in the bid that it has met or exceeded the DBE goal, the DBE Intended Participation Affidavit, its attachments, and a written confirmation from each DBE that it is participating in the contract as provided on the affidavit, shall be submitted as follows:

- (1) The DBE Intended Participation Affidavit, its attachments, and the confirmations must be received by the Civil Rights Office no later than 4:00 P.M. on the fifth working day following the bid opening. Copies of this affidavit and the attachments are available from the Civil Rights Office, 1135 N. 22nd Avenue (second floor), mail drop 154A, Phoenix, Arizona 85009, phone (602) 712-7761, or on the internet at http://www.azdot.gov/inside_adot/CRO/DBEP.asp. This affidavit and its attachments shall indicate that the bidder has met or exceeded the DBE goal if this was indicated on the submittal with the bid.
- (2) The affidavit and attachments must be accurate and complete in every detail and must be signed by an officer of the contractor(s).
- (3) The DBE Intended Participation affidavit must be submitted listing the DBEs used and the creditable amounts.

- (4) A separate DBE Intended Participation affidavit attachment must be submitted for each DBE used to meet the goal of the project. The bidder shall indicate each DBE's name, the bid items the DBE will perform, and proposed subcontract amount. All partial items must be explained. If not, the DBE will be considered to be responsible for the entire item.
- (5) A written confirmation from each DBE used to meet the goal indicating that it is participating in the contract, as provided on the affidavit, must also be submitted at this time.
- (6) A bidder must determine DBE credit in accordance with Section 10 above, entitled "Crediting DBE Participation Toward Meeting Goals." The affidavit will be reviewed by the Civil Rights Office.
- (7) Only those DBE firms certified by the Arizona Unified Certification Program (AZUCP) at the time of the bid opening will be considered. It shall be the bidder's responsibility to ascertain the certification status of designated DBEs.
- (8) The bidder bears the risk of late delivery by the postal service or a delivery service. Late-filed affidavits will not be accepted.

13.02 Failure to Comply:

If the apparent low bidder fails to submit the required information by the stated time and in the manner herein specified, or if the submitted information reveals a failure to meet the requirements of the specifications, the apparent low bidder shall be ineligible to receive award of the contract and the bid will be rejected. The proposal guarantee (bid bond) shall be forfeited if no submission is made or if the State Transportation Board finds the submission was made in bad faith.

14.0 Documented Good Faith Effort:

14.01 General:

If the apparent low bidder has stated in its bid proposal that it has been unable to meet the DBE goal, that bidder must demonstrate, through detailed and comprehensive documentation, that good faith efforts have been made to solicit, assist, and use DBE firms to meet the DBE goal prior to the bid. The bidder cannot change its bid proposal after submission.

Failure to demonstrate good faith efforts to the satisfaction of ADOT will result in the rejection of the bid.

The apparent low bidder who cannot meet the DBE goal at the time bids are opened must submit its documentation of good faith effort to the Civil Rights Office. The bidder's documentation must be received by the Department's Civil Rights Office by 4:00 P.M. on the fifth working day after the bids are opened.

Bidders are encouraged to review Appendix A of 49 CFR Part 26.

In order to be awarded a contract on the basis of good faith efforts, a bidder must show that it took all necessary and reasonable steps to achieve the DBE goal which, by their scope, intensity, and appropriateness to the objective, could reasonably be expected to obtain sufficient DBE participation, even if they were not fully successful. The Department will consider the quality, quantity, and intensity of the different kinds of efforts the bidder has made. The efforts employed by the bidder should be those that one could reasonably expect a bidder to make if the bidder were actively and aggressively trying to obtain DBE participation sufficient to meet the DBE goal. Mere pro forma efforts are not sufficient good faith efforts to meet the DBE contract requirements.

The contractor shall, as a minimum, seek DBEs in the same geographic area in which it generally seeks subcontractors for a given project. If the contractor cannot meet the goals using DBEs from this geographic area, the contractor, as part of its effort to meet the goals, shall expand its search to a reasonably wider geographic area.

The following is a list of types of efforts a bidder must address when submitting good faith effort documentation.

- (1) Soliciting through all reasonable and available means (e.g., attendance at pre-bid meeting, advertising, written notices, and other means) the interest of all certified DBEs who have the capability to perform the work of the contract. The bidder must solicit this interest within sufficient time to allow DBEs to respond to the solicitation. The bidder must determine with certainty if the DBEs are interested by taking appropriate steps to follow-up initial solicitations.
- (2) Selecting portions of the work to be performed by DBEs in order to increase the likelihood that the DBE goals will be achieved. This includes, where appropriate, breaking out contract work items into economically feasible units to facilitate DBE participation, even when the prime contractor might otherwise prefer to perform these work items with its own forces.
- (3) Providing interested DBEs with adequate information about the plans, specifications, and requirements of the contract in a timely manner to assist them in responding to a solicitation.
- (4) Negotiating in good faith with interested DBEs. It is the bidder's responsibility to make a portion of the work available to the DBE subcontractors and suppliers, and to select those portions of work or material needs consistent with the available DBE subcontractors and suppliers, so as to facilitate DBE participation. Evidence of such negotiation includes the names, addresses, and telephone numbers of DBEs that were considered; a description of the information provided from the plans and specifications for the work selected for subcontracting; and evidence as to why additional agreements could not be reached for DBEs to perform work.

A bidder using good business judgment would consider a number of factors in negotiating with subcontractors, including DBE subcontractors, and would take a firm's price and capabilities as well as contract goals into consideration. However, the fact that there may be some additional costs involved in finding and using DBEs

is not in itself sufficient reason for a bidder's failure to meet the DBE goal, as long as such costs are reasonable. Also, the ability or desire of a prime contractor to perform the work of a contract with its own organization does not relieve the bidder of the responsibility to make good faith efforts. However, prime contractors are not required to accept higher quotes from DBEs if the price difference is excessive or unreasonable. Documentation, such as copies of all other bids or quotes, must be submitted.

- (5) Not rejecting DBEs as being unqualified without sound reasons based on a thorough investigation of their capabilities. The contractor's standing within its industry, membership in specific groups, organizations or associations and political or social affiliations (for example, union vs. non-union employee status) are not legitimate causes for the rejection or non-solicitation of bids in the contractor's efforts to meet the project goal.
- (6) Making efforts to assist interested DBEs in obtaining bonding, lines of credit, or insurance as required by the recipient or contractor.
- (7) Making efforts to assist interested DBEs in obtaining necessary equipment supplies, materials, or related assistance or services.
- (8) Effectively using the services of available minority/women community organizations; minority/women contractors' groups; local, state, and Federal minority/women business assistance offices; and other organizations as allowed on a case-by-case basis to provide assistance in the recruitment and placement of DBEs.

In determining whether a bidder has made good faith efforts, the Department will take into account the ability of other bidders to meet the DBE goal.

The bidder will not be considered to have made good faith efforts if the bidder failed to contact the ADOT Civil Rights Office prior to the letting, either in writing, by e-mail, or by telephone, to inform the Civil Rights Office of the firm's difficulty in meeting the DBE goals on a given project, and to request assistance. If the bidder contacts the Civil Rights Office by telephone, the contact must be documented in a telephone log indicating the date and time of call, and name of the person to which he spoke. The telephone number for the Civil Rights Office is (602) 712-7761. The contact must be made in sufficient time to allow the Civil Rights Office to provide assistance.

The ADOT Civil Rights Office will analyze the submittal to determine if in fact good faith efforts have been demonstrated consistent with ADOT procedures and the Federal regulations, 49 CFR 26, Appendix A.

The bidder may appeal the determination of the Civil Rights Office to the State Engineer. That appeal must be in writing and personally delivered or sent by certified mail, return receipt requested, to the State Engineer. The protest must be received by the State Engineer no later than seven calendar days after the decision of the Civil Rights Office. Copies of the protest shall be sent by the protestant to every bidder, at the same time the protest is submitted to the State Engineer. Any other interested party may submit a

response to the appeal no later than seven calendar days after the appeal is requested. Responses from other interested parties must also be in writing and personally delivered or sent by certified mail, return receipt requested, to the State Engineer. Any interested party submitting such response shall also provide a copy of its response to every bidder, at the same time the protest is submitted to the State Engineer. The State Engineer shall promptly consider any appeals under this subsection and notify all bidders of the State Engineer's findings and decision.

Any interested party may protest the State Engineer's decision to the Transportation Board, pursuant to the requirements of Subsection 103.10 of the Standard Specifications.

14.02 Failure to Comply:

If the apparent low bidder fails to submit the required information by the stated time and in the manner herein specified, or if the submitted information reveals a failure to meet the requirements of the specifications, the apparent low bidder shall be ineligible to receive award of the contract and the bid will be rejected. The proposal guarantee (bid bond) shall be forfeited if no submission is made or if the State Transportation Board finds the submission was made in bad faith.

15.0 Rejection of Low Bid:

If, for any reason, the bid of the apparent low bidder is rejected, there will be a new apparent low bidder. The Department will notify the new apparent low bidder, and this bidder shall submit its subsequent detailed submission as set forth in paragraph 12 or 13 above.

16.0 Time is of the Essence:

TIME IS OF THE ESSENCE IN RESPECT TO THE DBE PROVISIONS.

17.0 Contract Performance:

Contract items of work designated by the contractor to be awarded to DBEs shall be performed by the designated DBE or a Department-approved DBE substitute. DBE contract work items shall not be performed by the contractor, or a non-DBE subcontractor without prior approval by the Civil Rights Office. The DBE must perform a commercially useful function; that is, the DBE must manage, perform, and supervise a distinct element of work.

The Department reserves the right to inspect all records of the contractor and all records of the DBEs concerning this contract.

The contractor shall provide to the Engineer, at the pre-construction conference, copies of completed and signed subcontracts purchase orders, invoices, etc., with the appropriate DBEs.

Within five working days of the preconstruction conference, the contractor shall also provide electronic copies of signed subcontract agreements to the Civil Rights Office through the

Department's web-based payment tracking system (<https://adot.dbesystem.com>). As part of this submittal, contractors shall be required to log into the system and enter the name, contact information, and subcontract amounts for all subcontractors and vendors performing on the project as verification that scopes of services and commitments made through the DBE Intended Participation Affidavits are being met.

Subcontract agreements shall include all required assurances, including FHWA Form 1273, and the prompt payment and return of retention requirements specified in Subsection 109.06(B) of the specifications. Each page of each required attachment must be dated and initialed by the DBE in order for the subcontract to be considered valid. Contractors executing agreements with subcontractors, DBE or non-DBE, that materially modify federal regulation and state statutes, or prompt payment and retention requirements, through subcontract terms and conditions will be found in breach of contract which may result in termination of the contract, or any other such remedy as the Engineer deems appropriate.

Use of a DBE named on the DBE Intended Participation Affidavit is a condition of award. Substitution will not be allowed without written evidence from the prime contractor and DBE that the DBE is unable or unwilling to perform. Contractors may not terminate a DBE subcontract for convenience, in whole or in part, except to the extent that the Department has eliminated items of work subcontracted to the DBE. All terminations, substitutions, and reductions in scope must be approved by the Civil Rights Office.

18.0 Non-Performance by DBEs:

In the event a DBE is unable or unwilling to fulfill its agreement with the contractor, the contractor will immediately notify the Engineer and provide all facts surrounding the matter. Such failure on the part of a DBE will not relieve the contractor of responsibility for meeting the DBE goal on the contract. The contractor shall immediately make reasonable good faith efforts to obtain another certified DBE to perform an equal or greater dollar value of work to the extent needed to meet the DBE goal. The substitute DBE's name, description of work, and dollar value of work shall be submitted to the Engineer and the Department's Civil Rights Office. Approval of the Civil Rights Office must be obtained prior to the substitute DBE beginning work.

In the event a prime contractor is unable, after a substantial good faith effort, to obtain another certified DBE, the Department's Civil Rights Office may lower the DBE goal on the project. However, the Civil Rights Office must approve this in writing prior to a Non-DBE starting the work which had been subcontracted to the DBE.

19.0 Compliance:

The contractor's achievement of the goal is measured by actual payments made to the DBEs. The contractor shall submit at the completion of the project the "Certification of Payments to DBE Firms" affidavit for each DBE firm working on the project. This affidavit shall be signed by the prime contract and the relevant DBE, and submitted to the Civil Rights Office. At that time, a copy of each completed affidavit shall also be submitted to the Engineer.

Acceptance and final payment to the contractor, in accordance with Subsections 105.20 and 109.09, will not be made until all "Certification of Payments to DBE Firms" affidavits are received and deemed acceptable by the Engineer and the Civil Rights Office.

20.0 Sanctions:

If the Department determines that the contractor has failed to make sufficient reasonable efforts to meet contract DBE goals, or to otherwise carry out these DBE special provisions, such failure shall constitute a breach of contract and may result in termination of the contract, or any other such remedy as the Engineer deems appropriate.

If the Engineer determines that such failure is not cause to terminate the contract, an amount equal to the value of the DBE goal that was not obtained will be deducted from the payment due the contractor. However, if the failure is the first by the contractor, and the Engineer determines the failure was an unintentional error or oversight, the amount to be deducted may be reduced up to one-half (1/2) of the value of the unobtained DBE goal as determined by the Civil Rights Office. In addition to any other sanctions, willful failure of the contractor or a DBE to comply with this contract or with the Federal DBE regulations may result in disqualification from further contracting, subcontracting, or other participation in ADOT projects.

(MENTOR, 02/23/06)

MENTOR-PROTEGE PROGRAM

Description:

Purpose:

The Mentor-Protege program is an initiative to encourage and develop disadvantaged businesses in the highway construction industry. The program will permit contractors to provide certain types of assistance to certified Disadvantaged Business Enterprise (DBE) subcontractors on highway construction projects.

The program is intended to increase legitimate DBE activities and is not intended to diminish nor circumvent existing DBE rules or regulations. Abuse of this program may be used as the basis for actions against both categories of firms including suspension or debarment.

Policy:

It is the policy of ADOT that contractors and certified DBE subcontractors may engage in a Mentor-Protege agreement under certain conditions. Such an agreement must be mutually beneficial to both parties and ADOT in fulfilling requirements of 49 Code of Federal Regulations Part 23.

Definitions:

DBE: The definition, status, and requirements of DBE firms are defined by 49 CFR Part 23. Please also refer to the special provision entitled "Disadvantaged Business Enterprises".

Mentor: A designated contractor who oversees the development of a designated DBE subcontractor by training, counseling, assisting, and sponsoring the DBE firm in an ADOT approved Mentor-Protege Program.

Protege: An ADOT-certified DBE subcontractor who is guided by a mentor through training and specialized assistance to gain experience, develop expertise in highway construction, and attain general business growth in an approved Mentor-Protege program.

Mentor-Protege Development Plan: A detailed plan outlining a management agreement between a contractor (who agrees to serve as a mentor) and a DBE subcontractor (who agrees to serve as a protege).

Implementation:

Approval Process:

- (1) When a contractor and DBE agree to engage in a Mentor-Protege Development Plan Agreement, ADOT Civil Rights Office will be notified by either party for the purpose of (a) reviewing requirements of STAA, 49 CFR part 23, and Mentor-Protege program; (b) establishing timeline for processing Agreement; (c) preliminary review of Agreement objective(s) and duration; and (d) reporting requirements. (A copy of the suggested form of agreement is included in these special provisions).
- (2) A completed Mentor-Protege Development Plan will be submitted to ADOT within 30 days following the initial review. Approval of the Agreement by ADOT will be in two stages:
 - a) General approval of Agreement by ADOT within 15 working days following submission of Agreement.
 - b) Approval of working plan for the designated project where a Mentor-Protege Development Plan will be implemented.
- (3) Duration of a Mentor-Protege Development Plan may exceed that of a single project, not to exceed three years. Duration of a working plan may exceed that of a single project. However, the continued use of an existing working plan must be approved by the ADOT Civil Rights Office prior to beginning work on a new project.
- (4) The Mentor-Protege program is not intended to provide DBE firms with a means to avoid management and operational responsibilities. Mentors

cannot be responsible for the management of DBE proteges. Under the program, all administrative functions must be performed by personnel responsible to or employed by protege. The protege must retain final decision making responsibilities.

- (5) Mentor and protege shall agree to an interview by ADOT Civil Rights Office during the development of the Mentor-Protege Development Plan.
- (6) Mentor and protege shall agree to evaluations by ADOT. The frequency and method will depend on the project.

Content of Mentor-Protege Development Plan:

A Mentor-Protege Development Plan Agreement shall address the following:

- (1) Areas of Assistance: Identify the specific areas in which the protege requires assistance.
- (2) Schedule of Assistance: Develop an Action Plan which defines the types and scope of assistance the mentor will provide to meet the protege's needs.
- (3) Responsibilities: Define the responsibilities of the mentor and the protege in each of the activities.
- (4) Benchmarks: Include measurable benchmarks to be reached by the protege at successive stages of the plan.
- (5) Evaluation: Provide formal evaluations of the protege's attainment of benchmarks. Evaluations must be made by both the mentor and the protege and reviewed by ADOT.
- (6) Duration: Specify the maximum time frame the development plan agreement can remain in effect not to exceed three years.
- (7) Assurances: Provide assurances that all agreements, oral and written, pertaining to the Mentor-Protege program do not improperly obtain the benefits of the DBE program.
- (8) Key Personnel: Identify mentor's representative(s) responsible for training and/or coordinating the assistance provided to the protege.
- (9) Fees: Identify any fees paid as a condition of the agreement.
- (10) Copies of agreements: Attach copies of all bonding, security, lease agreements, notes, contracts, etc., made for the duration of the Mentor-Protege Plan.

Type of Assistance:

The type of assistance provided by contractors may include, but not be limited to:

- (1) Financial:
 - a) Working Capital Secured by Time Demand Notes or Stocks. Proteges acquiring working capital through the issuance of stocks must maintain no less than 51 percent ownership to maintain DBE certification. Time demand notes may be used to secure working capital. However, any abusive use of recall features will be cause for terminating program. Where working capital is secured by stocks or demand notes, a third party such as a bank could receive progress payments for work accomplished by the protege, made out jointly to the agent and the protege and make payments, on behalf of the protege, to material suppliers or for Federal and State payroll taxes, etc. In no case can the day-to-day control of the firm be relinquished by the disadvantaged owner as a requirement of the loan.
 - b) Bonding. Mentors may bond the entire job and charge a pro-rata share of the cost to the protege. Mentors may bond the entire job and carry the protege by absorbing the cost of the bond. Arrangements of the bonding must be included in the Schedule of Assistance.
- (2) Management Technical Assistance:
 - a) Assist in conducting a Protege Self-Assessment by areas to be strengthened for long-range planning of the protege firm.
 - b) Assist in developing business plan, loan packaging, and financial counseling.
 - c) Assist the protege in setting up a cost accounting system and train the protege's personnel to assume full control.
 - d) Provide training in plan interpretation, estimating, and materials supply function.
 - e) Provide guidance in general project management and related areas to make the protege aware of techniques to improve productivity and competitiveness and broaden knowledge of industry practices.
- (3) Operation:

- a) Equipment/Facilities Use. Equipment and facilities may be furnished by mentor, provided that separate lease agreements are made and control over the equipment and facilities are under the supervision of protege.
- b) Training of managers and specialists of the protege in state-of-the-art methods in the contracting industry.
- c) Mentors may provide personnel with specialized expertise for a specific purpose and duration as outlined in the Action Plan. Such personnel must be on the protege's payroll and under direct supervision of the protege. Long term, continual, or repetitive use by a protege of personnel primarily employed by the mentor will be construed as an attempt to artificially inflate DBE participation and may be cause for termination of the Mentor-Protege agreement and decertification of the DBE.

General Practice:

- (1) Agreements may not include exclusive arrangements which limit competition.
- (2) DBE firms shall have the latitude to quote bids to other contractors.
- (3) The contractor and the DBE involved in a Mentor Protege agreement must remain separate and independent business entities.
- (4) Middlemen or passive conduits which serve no commercially useful function, or subcontractors acting essentially as brokers are unacceptable.
- (5) Formal or informal agreements which limit control and management by DBE firms are unacceptable.
- (6) Part ownership in a DBE firm by a non-disadvantaged entity, including a mentor, is permitted by the regulations (49 CFR 23) and may be necessary to ensure adequate capital and technical guidance of the DBE participant. However, any financial investment by the mentor must not create a situation wherein the mentor may assume control over the DBE firm.

Modifications:

Modifications to the Mentor-Protege Development Plan shall be subject to the approval of ADOT.

Termination:

The Mentor-Protege Development Plan may be terminated by mutual consent by both parties with notice to ADOT. ADOT may terminate approval of the Plan upon determination that:

- (1) The protege firm no longer meets the eligibility standards for certification as a DBE.
- (2) Either party has failed or is unable to meet its obligations under the Development Plan.
- (3) The DBE is not progressing or is not likely to progress in accordance with the Development Plan.
- (4) The DBE has reached a satisfactory level of self-sufficiency to compete without special treatment provided in the Development Plan.

In the event a Mentor Protege Development Plan is terminated, the contractor will remain responsible for the DBE goals established in the project Special Provisions.

ARIZONA DEPARTMENT OF TRANSPORTATION

Mentor-Protege Development Plan Agreement

PART ONE: General Agreement

This agreement entered into this ____ day of _____, 20__, in the city of _____, Arizona, by and between _____ (hereafter known as Mentor), and _____ (hereafter known as Protege), in accordance with rules and regulations of the Arizona Department of Transportation (ADOT) Mentor-Protege program, and in accordance with the requirements for increased Disadvantaged Business Enterprises (DBE) participation in the Surface Transportation Act of 1982 (STAA) and Surface Transportation and Uniform Relocation Assistance Act of 1987 (STURAA).

This agreement is intended to cover the general relationship between the parties to insure compliance with STAA, STURAA, and ADOT guidelines, and to implement all provisions set forth in the Mentor-Protege Development Plan.

PART TWO: Assurances

2.1 Both mentor and protege will remain separate and independent business entities. Protege shall have the latitude to quote bids to other contractors.

2.2 Protege is an ADOT-certified DBE firm.

2.3 The Mentor-Protege program is not intended to provide DBEs with means to avoid management and operational responsibilities.

2.4 All agreements, oral and written, pertaining to this Mentor-Protege Plan Agreement do not cause the protege to improperly obtain the benefits of the DBE program.

PART THREE: Content of Plan

Both parties will agree to content of the plan which will include but not be limited to:

3.1 Exhibit A: Areas of Assistance--(Areas identified by both parties as the basis for providing assistance by mentor to protege.)

3.2 Exhibit B: Schedule of Assistance-- An Action Plan developed by both parties defining the types and scope of assistance; responsibilities of mentor and protege in each activity; resources to be utilized; and measurable benchmarks to be reached by protege.

3.3 Exhibit C: Key Personnel-- A list of mentor and protege representatives responsible for training and/or coordinating the Plan.

3.4 Exhibit D: Lease/Agreement(s)--Full copies of all lease agreements for equipment and facilities; financial agreements; and other agreements between the two parties and/or by third parties.

PART FOUR: Monitoring

4.1 Both parties hereby specifically consent to the monitoring of this contract by the appropriate federal and state officials or their agents, and to agree to cooperate with such agencies.

4.2 Both mentor and protege agree to evaluate the progress of the Plan at scheduled intervals with the results reviewed by ADOT.

PART FIVE: Duration

The duration of the Plan will coincide with the length of the project for which the plan was intended. Extended agreement plans shall not exceed a period of three years.

PART SIX: Modifications

None of these agreements may be modified except in writing signed by both parties and approved by ADOT.

PART SEVEN: Termination

The mentor or protege retains the right to terminate this agreement by showing cause in a written notice to all parties and ADOT. ADOT may terminate the approval of this agreement by showing cause in a written notice to mentor and protege. In the event of termination of agreement or termination of ADOT approval, the contractor will remain responsible for the DBE goals established in the project Special Provisions.

PART EIGHT: Privacy Act Provision

The information contained herein and on attachments is used for the ADOT Mentor-Protege Program only, and may not be disclosed without the express permission of all parties involved in this agreement.

IN WITNESS WHEREOF, the parties hereto have caused this agreement to be executed by their duly authorized officers on the day and year first above written.

_____	_____	_____
Date	Mentor Firm (Authorized Official Name)	Signature
_____	_____	_____
Date	Protege Firm (Authorized Official Name)	Signature

(TRIBE, 04/15/92)

UTILIZATION OF NATIVE AMERICANS:

The project is located on Salt River Maricopa Indian Community which may subject the contractor to the laws and regulations of the Salt River Pima Maricopa Indian Community. Contactors shall make themselves aware of any labor requirements, taxes, fees, licenses, permits or conditions that may be imposed by the Salt River Pima Maricopa Indian Community on work performed in the area.

On other project in this area, the utilization of Native Americans has developed a reservoir of capable, trained workers. The contractor shall contact the office of Tribal Labor Relations listed below for assistance in hiring such workers. The contractor shall give preference in hiring as many works indigenous to the area as it can properly utilize in the processing of the work. The contractor shall provide a manpower projection identifying the type of crafts and trades that it expect to utilize, the approximate date that it expect to start work, and the name of one of its employees to be its contact.

The tribal contact office for labor relations is identified as follows:

Salt River Pima-Maricopa Indian Community 10005 East Osborn Road, Scottsdale AZ 85256	
Labor	Human Resource Department (480) 362-7893
Taxes	Finance Department (480) 362-7493
Business License	Community Development Department (480) 362-7649
Construction Permit/Haul	Engineering and Construction Services (480) 362-7910
Irrigation Water Use Permit	Public Works Department (480) 362-5600
Domestic Water Use Permit	Public Works Department (480) 362-5600
Solid Waste	Public Works Department (480) 362-5600
Materials Preference	Salt River Materials Group (480) 850-5757
Preferred Vendors	Purchasing Division (490) 362-7700
Cultural Sensitivity Training	Community Development Department (480) 362-7656

(LSCAPE, 10/12/01)

Construction and Landscape Establishment Phases:

The work on this project will be considered as being divided into two phases: the Construction Phase and the Landscape Establishment Phase. The Construction Phase shall be defined as all work not included in Landscape Establishment Phase. The Landscape Establishment Phase shall be as described and specified under Section 807.

When the terms "Phase I" and "Phase II" appear in Sections 806 or 808 of the Standard Specifications, the term "Phase I" shall refer to the Construction Phase, and "Phase II" shall refer to the Landscape Establishment Phase, both as specified above.

Prior to the beginning of the Landscape Establishment Phase, the contractor shall be responsible for maintaining and protecting all planting areas, as specified in Subsections 806-3.06 and 807-3.02. No measurement or payment will be made for such work during the Construction Phase, the costs being considered as included in the cost of contract items.

The provisions of Subsection 108.09, Failure to Complete the Work on Time, will apply only to the work under the Construction Phase. The original contract amount, as used in Subsection 108.09 of the Standard Specifications, will mean the original contract amount of all items of work.

At the satisfactory completion of work under the Construction Phase, and when all quantities have been checked and verified, the monies which have been retained by the Department each month will be paid the contractor in accordance with the provisions of Subsection 109.06, Partial Payments and Retention.

GENERAL REQUIREMENTS:

Availability of Documents:

Project documents will be available as shown below:

Documents	Paper Format	Electronic Format
Project Plans	X	X
Special Provisions	X	X
Proposal Pamphlet	X	X
Additional Documents (if available)		
Cross Sections		
Earthwork Quantity Sheets		
Other Reports		
Existing Ground Digital Terrain Model (DTM)		X
Design Digital Terrain Model (DTM)		X

Documents in Electronic Format:

Project documents in electronic format are available on the Contracts and Specifications website.

In the case of any conflict or discrepancy between the project plans, specifications, or proposal pamphlet in paper and electronic format, the paper document shall govern.

The project plans are provided in PDF format. The Department makes no representation or warranties as to the compatibility, usability, or readability of the PDF plans with any system, software, hardware, or application package other than that on which the files were originally saved. The contractor bears the sole risk of any modifications, manipulations, or alterations to the plans.

The special provisions and proposal pamphlet are provided in PDF format. The Department makes no representation or warranties as to the compatibility, usability, or readability of the PDF documents with any system, software, hardware, or application package other than that on which the files were originally saved. The contractor bears the sole risk of any modifications, manipulations, or alterations to the special provisions and proposal pamphlet.

The cross sections, earthwork quantity sheets, and other reports, if applicable, are provided only in PDF format. They are provided for information purposes and contractor convenience only. They are not part of the contract documents. The contractor's use of the information in the cross sections, earthwork quantity sheets, and other reports is at the contractor's sole risk. The Department makes no representation or warranties as to the compatibility, usability, or readability of the PDF documents with any system, software, hardware, or application package other than that on which the files were originally saved. The contractor bears the sole risk of any modifications, manipulations, or alterations to the documents.

The existing ground DTM and the design DTM, if applicable, are provided as DGN files. They are provided for information purposes and contractor convenience only. The DTMs are not part of the contract documents. The contractor's use of the information in the DTMs is at the contractor's sole risk. The Department makes no representation or warranties as to the compatibility, usability, or readability of the DTMs with any system, software, hardware, or application package other than that on which the files were originally prepared. The version of Microstation used to save the DTMs is indicated at <http://www.azdot.gov/business/engineering-and-construction/CADD>.

The Department is providing the electronic project files to bidders for informational purposes in conjunction with work or services to be provided to the Department under this project. Any use of the electronic files for any purposes other than for this project is prohibited.

Bidders List Requirements:

Bidders shall submit a list of the names of all subcontractors, service providers, manufacturers and suppliers submitting bids, proposals or quotes for this project on the "List of Subcontractors, Suppliers, Service Providers and Manufacturers Bidding ADOT Contracts" form. The form is appended to the Special Provisions.

All bidders must submit the required form, whether or not the bid is the low bid.

Bidders must submit this form with all requested information to the ADOT Civil Rights Office no later than 4:00 p.m. on the fifth working day after bids are opened. Faxed copies are acceptable. The fax number is (602) 712-8429.

The address for the Department's Civil Rights Office is 1135 N. 22nd Avenue (second floor), Phoenix, Arizona 85009.

IF THE BIDDER FAILS TO SUBMIT THE REQUIRED INFORMATION BY THE STATED TIME AND IN THE MANNER HEREIN, THE BIDDER SHALL BE INELIGIBLE FOR AWARD OF THE CONTRACT.

The form must be complete and must include all the names and contact information for all subcontractors, service providers, manufacturers and suppliers that submitted bids, proposals, or quotes on this project regardless of the bidder's intentions to use the sub bid. Information on second tier bids is not required.

Title 49 of the Code of Federal Regulations, Part 26.11, required ADOT to create and maintain a bidders list. The purpose of this list is to develop the list of the DBE and non-DBE firms seeking to work on Federal-aid highway construction contracts. This information is then used to set ADOT's overall DBE goal. The regulation requires the following information be collected: the firm's name; the firm's address; the firm's status as a DBE or non-DBE; the age of the firm; and the annual gross receipts of the firm.

The Civil Rights Office will contact listed firms to obtain information from them that will be used in the agency's annual DBE goal setting process. This information will be maintained as confidential to the extent allowed by federal and state law.

Non-Collusion Affidavit:

Bidders are advised that the "Affidavit by Contractor Certifying That There Was No Collusion in Bidding of Contract" is no longer included as a separate sheet in the contract documents.

This language is part of the proposal, and by signing the proposal the bidder certifies to the non-collusion requirements specified therein.

Construction Restrictions:

There will be no construction work allowed on weekends and holidays. The construction work is also limited to daylight hours only. Holidays are from 6:00 PM of the last working day prior to the holiday or major event through 6:00 AM of the first working day following the holiday. The contractor shall plan his construction operations accordingly. The restricted holidays include: New Year's Eve and Day, MLK Day/Civil Rights Day, President's Day, Memorial Day, Independence Day, Labor Day, Veterans Day, Thanksgiving Day, the day after Thanksgiving Day, Christmas Eve and Christmas Day.

Removal of Asphaltic Concrete Pavement:

Upon removal, the existing asphaltic concrete material, which is not used on the project, shall become the property of the contractor and shall be disposed of off the project limits per Section 202 of the Standard Specifications.

SRPMIC Construction Permit:

The contractor shall be responsible for obtaining a construction permit from the Salt River Pima-Maricopa Indian Community (SRPMIC) before starting any construction work for the project. A “no fee” ROW permit will be issued to the contractor after they submit necessary insurance certifications.

Maricopa Association of Governments Standards:

The plans and these Special Provisions reference certain Standard Specifications and Standard Details promulgated by the Maricopa Association of Governments (MAG).

When MAG Standard Specifications and Standard Details are specified for certain items of work, the description, materials, and construction requirements of those items shall conform to the requirements of the MAG Standards in parts 200 through 700, except as may be superseded or supplemented by these Special Provisions. All MAG 100 sections, except 107.11, and all Sample Forms in the MAG Standard Specifications are not applicable. All concrete shall be in compliance with ADOT specifications, not MAG specifications. The table below shows the ADOT Concrete equivalent to be used for MAG concrete specified on plans and standard MAG details on this project.

MAG Concrete	ADOT Equivalent Concrete
AA	P
A	S (3000 Psi)
B	B

MAG Uniform Standard Specifications and Details for Public Works Construction with revisions through 2015 are available from:

Maricopa Association of Governments
302 North 1st Avenue, Suite 300
Phoenix, Arizona 85003

Copies are also available on the Internet at: <http://www.mag.maricopa.gov>

Erosion / Sediment Control and Stormwater Quality:

The contractor shall give attention to the impact of the construction operations upon natural landscape, and shall take care to maintain natural surroundings undamaged at no additional cost to the Department. The contractor shall minimize soil disturbance by implementing Low Impact Development (LID) methods to control erosion as close as possible to the source of disturbance.

The contractor shall use all means necessary to significantly reduce impacts by staging/stockpiling and carrying out project activities in such a way as to minimize the potential for erosion and discharge of pollutants from the project site.

The contractor shall apply perimeter control Best Management Practices (BMPs) (wattles) on the down-slope perimeter of construction disturbed areas, on-site staging, and stockpiling. To prevent sediment from bypassing the wattle ends, the end of the wattles shall be turned up the slopes for a minimum of 3 feet to form an "L" shape. No portion of the wattle shall be installed within 6 feet from the edge of the pavement. Wattles shall not be placed over any driveways or access roads that intersect with the roadway mainline. Additionally, wattles shall **not** be placed on the flow path of inlets and outlets of drainage facilities. Perimeter control BMPs (wattles) shall be installed in accordance with the manufacturer's instructions. The contractor shall adjust the field layout of erosion control and sediment prevention elements as approved by the Engineer. The contractor shall also observe ADOT traffic safety standards when installing perimeter control BMPs in the traffic clear zone/recovery area.

During construction the contractor shall minimize vehicular travel or equipment operation on the unpaved soil areas to maximum extent practicable (MEP). The contractor shall develop and implement procedures to avoid earth disturbance, soil compaction, and damage to vegetative cover from vehicular travel or equipment operation during inclement weather or unsuitable soil conditions. The contractor shall stabilize all construction disturbed soil areas at no additional cost to the Department.

Inclement weather or unsuitable soil conditions. The contractor shall stabilize all construction disturbed soil areas at no additional cost to the Department.

No grout, concrete or wash water shall be disposed within the project limits or its vicinity. The contractor shall install concrete washout BMP as needed and under the direction of the Engineer at no additional cost to the Department. This BMP shall include proper disposal of all excess grout, concrete, and wash water.

The contractor shall not use unpaved areas within the project limits for staging or stockpiling without first installing erosion control and sediment prevention BMPs and as directed and approved by the Engineer. Staging and stockpiling on the unpaved areas shall be avoided to MEP.

The contractor shall apply erosion/sediment and water quality protection BMPs as required by the commercial material source owner and environmental permit standard at no additional cost to the Department.

The contractor shall apply erosion/sediment and water quality protection BMPs for off-project-site staging, material storage, maintenance yard, disposal spots, and stockpiling areas as required by the facility owner and environmental permit standard at no additional cost to the Department.

Environmental Mitigation Measures:

The project mitigation measures are not subject to change without written approval from ADOT Environmental Planning.

Contractor Responsibilities

- If suspected hazardous materials are encountered during construction, work shall cease at that location and the Engineer will be notified. The Engineer will contact the Arizona Department of Transportation Environmental Planning hazardous materials coordinator (602.920.3882 or 602.712.7767) immediately, and make arrangements for assessment, treatment and disposal of those materials.
- If previously unidentified cultural resources are encountered during activity related to the construction of the project, the contractor shall stop work immediately at that location notify the Engineer and shall take all reasonable steps to secure the preservation of those resources. The Engineer will contact the Arizona Department of Transportation Environmental Planning, Historic Preservation Team, (602.712.8636 or 602.712.7767) immediately, and make arrangements for proper treatment of those resources.
- The contractor shall contact the Arizona Department of Transportation Historic Preservation Team (602.712.8636 or 602.712.7767) at least 10 (ten) business days prior to the start of ground-disturbing activities to arrange for qualified archaeologist monitor to be present during construction.
- If vegetation clearing will occur during the migratory bird breeding season (March 1-August 31), the contractor shall avoid any active bird nests. If the active nests cannot be avoided, the contractor shall notify the Engineer to evaluate the situation. During the non-breeding season (September 1-February 28), vegetation removal is not subject to this restriction.
- If tree removal will occur, the contractor shall notify the Engineer five (5) business days prior to removal. The Engineer will contact the Salt River Pima-Maricopa Indian Community Senior Environmental Engineer (Ms. Gina Leverette 480.457.0922; or Tommy Krebs 480.406.0388) to arrange for the collection of tree materials.
- The contractor shall prepare and implement a stormwater pollution prevention plan that meets the requirements of the construction general permit.
- The contractor shall prepare and submit a notice of intent for the project to the US Environmental Protection Agency.
- The contractor shall comply with all local air quality and dust control rules, regulations and ordinances which apply to any work performed pursuant to the contract.

Geotechnical Reports:

The Geotechnical Reports for this project will be available in Electronic Format as PDF document on the Contracts and Specifications website as specified under Additional

Documents under Availability of Documents in the General Requirements of these Special Provisions.

Protection of Excavations:

At all times, the contractor shall conduct the construction activities to safeguard pedestrians and vehicular access in the vicinity of the project. All holes or trenches left open overnight shall be surrounded by Type II barricades and Type A flashing warning lights, connected by warning tape or rope, as directed by the Engineer. The contractor shall provide plywood coverings or some other protection satisfactory to the Engineer over holes. There will be no direct measurement or payment for providing coverings or the warning tape, Type II barricades or rope, the costs being considered as included in the price of contract bid items.

(101ABRV, 02/04/16)

SECTION 101 DEFINITIONS AND TERMS:

101.01 Abbreviations: of the Standard Specifications is modified to add:

ARPA	Arizona Rock Products Association
IFI	International Fasteners Institute
ISO	International Organization for Standardization
ISSA	International Slurry Surfacing Association
NICET	National Institute for Certification in Engineering Technologies
NEC	National Electrical Code
NRMCA	National Ready Mixed Concrete Association
NSPS	National Society of Professional Surveyors
PPI	Plastic Pipe Institute
SSPC	Society for Protective Coatings

(101DEFN, 02/22/16)

SECTION 101 DEFINITIONS AND TERMS:

101.02 Definitions:

Bidding Schedule: of the Standard Specifications is revised to read:

The prepared schedule containing the estimated quantities of the pay items for which unit bid prices are invited.

Working Day: of the Standard Specifications is revised to read:

A day, exclusive of Saturdays, Sundays and State-recognized holidays, beginning at midnight, extending for a twenty-four hour period, and ending at midnight. Any Saturday, Sunday, or State-recognized holiday on which the contractor has been approved to work will also be counted as a working day. Working days on which weather conditions do not permit work on the project to proceed, as determined by the Engineer, will not be charged.

(102PREQ, 02/22/16)

SECTION 102 BIDDING REQUIREMENTS AND CONDITIONS

102.02 Prequalification of Bidders: the title and text of the Standard Specifications is revised to read:

102.02 Prerequisites for Bidding:

(A) General:

To submit a valid bid, the bidder must:

- (1) have prequalification from the Department as necessary for the project, in accordance with paragraph (B) of this Subsection, and
- (2) be included on the project Plansholder List as a Prime in accordance with paragraph (C) of this Subsection.

(B) Prequalification of Bidders:

Prior to submitting a bid, the bidder will (unless waived by the Department) be required to be prequalified with the Department to bid on the project. The submission of Prequalification information and determination of Prequalification shall be in accordance with the requirements of the Rules for Prequalification of Contractors as approved and adopted by the Department.

(C) Plansholder List:

There are two ways for a bidder to be included on the project Plansholder List as a Prime. It is the bidder's responsibility to ensure that it is on the Plansholder List as a Prime prior to submitting a bid.

If a bidder is issued a proposal pamphlet in paper format by the Department, the Department will place the bidder on the project Plansholder List as a Prime.

Firms can register electronically requesting placement on the project Plansholder List as either a Prime or Subcontractor/Vendor as follows:

- (a) Go to the C&S Website.
- (b) Select "Current Advertisements".
- (c) Identify the project of interest.
- (d) Click on the "Register" icon.
- (e) Select the "Bidder" or "Subcontractor/Vendor" radio button.
- (f) Complete all required fields.
- (g) Click "Save". This submits the request to the Department.
- (h) If all required information is provided, the "ADOT C&S Advertisement Registration Confirmation Screen" will appear. An email will also be sent to the email address provided acknowledging the request.

Requests to be included on the Plansholder List as a Prime will be evaluated by the Department to determine whether the bidder is prequalified for the project. The Department cannot guarantee that requests to be on the Plansholder List will be considered if the request is submitted less than five working days prior to the bid opening. The Department will send an email to the email address provided notifying the contractor of the results of their request.

The Department's email will state whether the request was approved or denied. More information regarding the Department's decision may be obtained by contacting the Contracts and Specifications Section.

If an individual from a firm submits a duplicate request to be placed on the Plansholder List, the request will be denied. The Department will register the contact person listed on the duplicate request to receive email notices of updates to the project. The Department will send an email to the email address provided notifying the contractor of the results of their request.

(D) Registration for Notifications:

Firms on the Plansholder List as a Prime or a Subcontractor/Vendor will receive notification of any changes to the project. Other interested parties can register electronically to receive email notification of any changes to the project as follows:

- (a) Go to the C&S Website.
- (b) Select "Current Advertisements".
- (c) Identify the project of interest.

- (d) Click on the "Register" icon.
- (e) Select the "Other" radio button.
- (f) Select the "Yes" radio button in response to "Are you interested in registering to be notified about any changes made to this advertisement?"
- (g) Complete all required fields.
- (h) Click "Save". This submits the request to the Department.
- (i) If all required information is provided, the "ADOT C&S Advertisement Registration Confirmation Screen" will appear. An email will also be sent to the email address provided acknowledging the request.

All parties registering to receive notifications will be sent an email when changes are made to the project.

(102NOBID, 09/19/12)

SECTION 102 - BIDDING REQUIREMENTS AND CONDITIONS:

102.03 **Suspension from Bidding:** of the Standard Specifications is revised to read:

The Department may suspend any person and any subsidiary or affiliate of any person from further bidding to the Department and from being a subcontractor or a supplier or otherwise participating in the work:

- (A) If that person or any officer, director, employee or agent of that person is convicted, in this State, or any other jurisdiction, of a crime involving any of the following elements or actions:
 - (1) Entering into any contract, combination, conspiracy or other unlawful act in restraint of trade or commerce;
 - (2) Knowingly and willfully falsifying, concealing, or covering up a material fact by trick, scheme, or device;
 - (3) Making false, fictitious, or fraudulent statements or representations;
 - (4) Making or using a false writing or document knowing it to contain a false, fictitious, or fraudulent statement or entry;
 - (5) Misrepresentation or false statement on any application for bonding;

- (6) Misrepresentation or false statement on any application for prequalification; or
- (B) If the Department makes a finding of any of the above or finds that the contractor is not a Responsible Bidder or a Responsible Contractor.
- (C) If the Department determines that a contractor, subcontractor, or supplier has repeatedly or willfully failed to comply with federal or state immigration laws.

Under this subsection, a person means any individual, partnership, joint venture, corporation, association or other entity formed for the purpose of doing business as a contractor, subcontractor or supplier.

The signature of the bid proposal by a bidder constitutes the bidder's certification, under penalty of perjury under the laws of the United States, that the bidder, or any person associated therewith in the capacity of owner, partner, director, officer, principal investor, project director, manager, auditor, or any position involving the administration of federal funds, has not been, or is not currently, under suspension, debarment, voluntary exclusion or been determined ineligible by any federal agency within the past three years. Signature of the bid proposal also certifies, under penalty of perjury under the laws of the United States, that the bidder does not have a proposed debarment pending. In addition, signature of the bid proposal certifies that the bidder has not been indicted, convicted, or had a civil judgment rendered against (it) by a court of competent jurisdiction in any matter involving fraud or official misconduct within the past three years.

Any exceptions to the above paragraph shall be noted and fully described on a separate sheet and attached to the bid proposal.

(102PRPMT, 02/22/16)

SECTION 102 BIDDING REQUIREMENTS AND CONDITIONS:

102.04 Contents of Proposal Pamphlet: the first paragraph of the Standard Specifications is revised to read:

The proposal pamphlet will state the location and description of the contemplated construction and will show the approximate estimate of the various quantities and kinds of work to be performed or materials to be furnished and will have a schedule of items for which unit bid prices are invited. The proposal pamphlet will state the time in which the work must be completed, the type and amount of the proposal guaranty and the date, time and place of the opening of proposals. The pamphlet will also include any Special Provisions or requirements which vary from or are not included in the Standard Specifications. Additional contract documents applicable to the specific project are listed in the Special Provisions.

(102ISSPSL, 02/22/16)

SECTION 102 BIDDING REQUIREMENTS AND CONDITIONS:

102.05 Issuance of Proposals: of the Standard Specifications is revised to read:

The Department reserves the right to refuse to issue proposal documents or to accept bids for any of the following reasons:

- (A) Lack of competency or adequate machinery, plant and other equipment, as revealed by the financial statement and experience questionnaires required under Subsection 102.02.
- (B) Incomplete work which, in the judgment of the Department, might hinder or prevent the prompt completion of additional work if awarded.
- (C) Failure to pay or settle satisfactorily all bills due for work on other contracts.
- (D) Failure to comply with any qualification regulations of the Department.
- (E) Default under previous contracts.
- (F) Unsatisfactory performance on previous work.
- (G) Entering into any contract, combination, conspiracy, or other unlawful act in restraint of trade or commerce.
- (H) Knowingly and willfully falsifying, concealing, or covering up a material fact by trick, scheme, or device.
- (I) Making false, fictitious, or fraudulent statements or representations.
- (J) Making or using a false writing or document knowing it to contain a false, fictitious, or fraudulent statement or entry.
- (K) Misrepresentation or false statement on any application for bonding.
- (L) Misrepresentation or false statement on any application for prequalification.
- (M) Lack of sufficient ability or integrity to complete the contract.

(102EXAM, 02/22/16)

SECTION 102 BIDDING REQUIREMENTS AND CONDITIONS

102.07 Examination of Plans, Specifications and Site of Work: the second paragraph of the Standard Specifications is revised to read:

A set of plans, special provisions, and the proposal pamphlet will be on file at Contracts and Specifications, 1651 W. Jackson, Room 121F, Phoenix.

Project plans, special provisions, proposal pamphlets, and other project documents, if available, will be provided in electronic format, at no charge, on the Contracts and Specifications website. Any interested party can access the advertised project documents.

(102LOBY, 10/01/90)

SECTION 102 - BIDDING REQUIREMENTS AND CONDITIONS:

102.09 Non-Collusion Certification: of the Standard Specifications is modified to add:

(A) Lobbying:

The bidder certifies, by signing and submitting this bid or proposal, to the best of his or her knowledge and belief, that:

- (1) No Federally appropriated funds have been paid or will be paid, by or on behalf of the undersigned, to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with the awarding of any Federal contract, the making of any Federal grant, the making of any Federal loan, the entering into any cooperative agreement, and the extension, continuation, renewal, amendment, or modification of any Federal contract grant, loan, or cooperative agreement.
- (2) If any funds other than Federally appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with this Federal contract, grant, loan, or cooperative agreement, the undersigned shall complete and submit Standard Form-LLL, "Disclosure Form to Report Lobbying," in accordance with its instructions. Copies of Form-LLL, "Disclosure Form to Report Lobbying", are available at ADOT Contracts and Specifications Services, 1651 W. Jackson, Room 121F, Phoenix, AZ 85007.

This certification is a material representation of fact upon which reliance was placed when this transaction was made or entered into. Submission of this certification is a prerequisite for making or entering into this transaction imposed by Section 1352, Title 31, U.S. Code. Any person who fails to file the required certification shall be subject to a civil penalty of not less than \$10,000 and not more than \$100,000 for each such failure.

The bidder also agrees, by submitting his or her bid or proposal that he or she shall require that the language of this certification be included in all subcontracts and lower tier subcontracts which exceed \$100,000 and that all such subcontractors and lower tier subcontractors shall certify and disclose accordingly.

The Department will keep the prime contractors' certifications on file as part of their original bid proposals. Each prime contractor shall keep individual certifications from all subcontractors and lower tier subcontractors on file. Certifications shall be retained for three years following completion and acceptance of any given project.

Disclosure forms for the prime contractor shall be submitted to the Engineer at the pre-construction conference. Disclosure forms for subcontractors and lower tier subcontractors shall be submitted to the Engineer by the prime contractor along with the submittal of each subcontract or lower tier subcontract, as required under Subsection 108.01, when said subcontracts exceed \$100,000.00. During the performance of the contract the prime contractor and any affected subcontractors shall file revised disclosure forms at the end of each calendar year quarter in which events occur that materially affect the accuracy of any previously filed disclosure form. Disclosure forms will be submitted by the Engineer to the Federal Highway Administration for further processing.

(102IRPSL, 02/22/16)

SECTION 102 BIDDING REQUIREMENTS AND CONDITIONS:

102.10 Irregular Proposals: Item (B) of the Standard Specifications is revised to read:

- (B) Proposals will be considered irregular and will be rejected for any of the following reasons:
- (1) If the bidder is not on the project Plansholder List as a Prime.
 - (2) If the proposal, bid bond or bidding schedule is on a form other than that furnished by the Department.
 - (3) If the bidder or surety fails to provide a proposal guaranty as specified in Subsection 102.12.
 - (4) If the bidder fails to sign the proposal when submitting a bid in the paper format.

- (5) If the bidding schedule does not contain a unit price for each pay item listed except in the case of authorized alternate pay items.
- (6) If the bidder fails to meet the required goal for Disadvantaged Business Enterprises (DBE) established in the Special Provisions or show good faith effort as determined by the Department.
- (7) If the bidder submits a proposal in both the electronic format and in the paper format.

(103RSBTY, 02/22/16)

SECTION 103 AWARD AND EXECUTION OF CONTRACT:

103.03 Responsibility: the third paragraph of the Standard Specifications is revised to read:

Non-responsibility may also be found for any of the following reasons:

- (A) Anti-competitive acts;
- (B) Lack of competency and adequate machinery, plant and other equipment, as revealed by the financial statement and experience questionnaires required under Subsection 102.02;
- (C) Incomplete work which, in the judgment of the Department, might hinder or prevent the prompt completion of additional work if awarded;
- (D) Failure to pay or settle satisfactorily all bills due for work on other contracts;
- (E) Failure to comply with any qualification regulations of the Department;
- (F) Default under previous contracts;
- (G) Unsatisfactory performance on previous work;
- (H) Knowingly and willfully falsifying, concealing, or covering up a material fact by trick, scheme, or device;
- (I) Making false, fictitious, or fraudulent statements or representations;
- (J) Making or using a false writing or document knowing it to contain a false, fictitious, or fraudulent statement or entry;
- (K) Lack of a proper contractor's license; or
- (L) Lack of sufficient ability or integrity to complete the contract.

(103AWARD, 12/14/09)

SECTION 103 - AWARD AND EXECUTION OF CONTRACT:

103.04 Award of Contract: the first paragraph of the Standard Specifications is modified to add:

When a contract is funded, either wholly or in part, by federal funds, an award of contract may be made contingent upon the successful bidder obtaining an appropriate license from the State Registrar of Contractors, in accordance with Arizona Revised Statutes 32-1101 through 32-1170.03. The license must be obtained within 60 calendar days following opening of bid proposals. No adjustment in proposed bid prices or damages for delay will be allowed as a result of any delay caused by the lack of an appropriate license.

Failure to acquire the necessary licensing within the specified period of time shall result in either award to the next lowest responsible bidder, or re-advertisement of the contract, as may be in the best interests of the Department.

Licensing information is available from:

Registrar of Contractors
3838 N. Central
Suite 400
Phoenix, AZ 85012
Phone: (602) 542-1525

SECTION 104 - SCOPE OF WORK:

104.04 Maintenance of Traffic: of the Standard Specifications is modified to add:

The project shall be constructed in accordance with Part VI of the Manual on Uniform Traffic Control Devices (MUTCD) 2009 Edition, the Arizona Supplement to the 2009 MUTCD, the Arizona Department of Transportation Traffic Control Design Guidelines (TCDG) 2010 edition, the Typical Application Figures contained therein and these Special Provisions and project plans. The Typical Application Figures are intended to be used by the contractor as an aid in developing specific plans for each work activity.

The contractor shall maintain a minimum of one lane in each direction for traffic during working hours on Longmore Road. There will be no traffic restrictions allowed during weekends and holidays. Activities that require complete closure of a property entrance shall be performed during off-peak hours when traffic volumes are lower. Trailblazing for pedestrians around the work zone shall be implemented.

The contractor shall provide a general construction schedule and a minimum of 72 hours of advance notice should access restrictions occur, to the Salt River Pima-Maricopa Indian Community Public Works Road Section, Arizona Department of Public Safety – Highway Patrol Division, City of Scottsdale Police Department, and local School

District.

The contractor shall provide a schedule of daily activities and corresponding traffic control schemes. The contractor shall develop and submit for the Engineer's review and approval, a final traffic control plan for each work activity anticipated on this project. Activities that impact traffic shall not begin until the traffic control plan has been approved by the Engineer. The information shall be provided in advance or during the weekly construction meeting in accordance with the requirements of Subsection 108.03 of the Standard Specifications and shall specify the limits of the work activities and related traffic control plan by location, direction and time.

Where no lane closure is necessary but where there is construction alongside the roadway, the contractor shall place 36-inch x 36-inch "ROAD WORK AHEAD" (W20-1) signing as directed by the Engineer to alert the public to the construction activities.

Work Hour Limitations:

The work shall be limited to a single lane long-term restriction and the work schedule shall be such that construction activities do not restrict traffic flow during Friday to Sunday and statutory holidays listed in these specifications and as directed by the Engineer. All construction activities will take place during daytime unless directed by the Engineer.

All construction work on this project is limited to day light hours only. Night time and weekend work will not be allowed on this project. Activities that require lane restrictions will not be allowed during the peak traffic times from 7:00 a.m. to 9:00 a.m. and from 4:00 p.m. to 6:00 p.m. unless specifically approved by the Engineer. The contractor shall maintain all traffic lanes on all roadways during the peak traffic times as listed above, at night, on weekends, on holidays and as directed by the Engineer. During work periods, the contractor shall maintain a minimum of one lane of traffic in each direction on each roadway, unless otherwise approved in advance by the Engineer. Left and right turns from all approaches shall be maintained at all times, unless otherwise approved in advance by the Engineer.

Impacts to driveways to adjacent properties shall be minimized and property owners notified and coordinated with a minimum of three working days in advance of activities affecting driveways. Any driveway shall remain at least half-width open at all times.

The contractor shall inform and coordinate in writing with adjacent affected property owners for all access restrictions as a result of his construction activities, duration of construction activities, and the possible interference with their day-to-day activities at least three days in advance of the restriction. If primary access cannot be maintained, the contractor shall provide an alternative, which will be pre-determined with the property owner and the Engineer prior to instituting the closure or restriction.

(104APA, 02/26/99)

SECTION 104 - SCOPE OF WORK:

104.04 Maintenance of traffic: of the Standard Specifications is modified to add:

In order to eliminate the possibility of causing or exacerbating air quality violations resulting from construction activities, any traffic control plans which include temporary traffic detours involving local adjacent streets or alternate routes must be approved by the Engineer.

104.08 Prevention to Air and Noise Pollution: of the Standard Specifications is modified to add:

In the event that the Governor declares an air pollution emergency, pursuant to ARS § 49-465.B., which restricts work schedules for all employees of the state and its political subdivisions, the Engineer will direct the contractor suspend all work activities until further notice. The contractor shall discontinue all current work activities as soon as possible, but not later than four hours after notification by the Engineer. The contractor will be compensated for labor costs incurred through the end of the work shift in which the notification occurs. No payment adjustments will be made for equipment or overhead costs resulting from the suspension of work. An extension of the time allowable under the contract will be granted in accordance with Subsection 108.08 of these specifications. In the event that any local air quality authority declares an air pollution advisory, the cooperation of the contractor is requested in complying with the actions recommended by the local authority to the maximum extent possible.

(104DUST, 11/01/95)

SECTION 104 - SCOPE OF WORK:

104.08 Prevention of Air and Noise Pollution: of the Standard Specifications is modified to add:

For work performed within Maricopa County, the contractor will be required to prepare a comprehensive fugitive dust control plan, in accordance with the guidelines established in Rule 310 of Maricopa County Regulation III, Control of Air Contaminants. The contractor may contact Maricopa County, Division of Air Pollution Control, to purchase a copy of the guidelines. The contractor shall complete and submit the control plan with the permit application, and obtain approval prior to construction or any other activities which may produce dust pollutants.

Some of the measures which the contractor may use to control or minimize fugitive dust include: increased use of water or chemical dust suppressants, cease work temporarily during high winds, reducing vehicle speeds and number of trips, maintaining freeboard of three inches or more in hauling, and covering or stabilizing stockpiles. The contractor shall be required to cover haul trucks with tarps or other suitable enclosures.

No separate payment will be made for preparation and implementation of the fugitive dust control plan, the costs being considered as included in the price of contract items.

(104MTBRN, 06/04/96)

SECTION 104 - SCOPE OF WORK:

104.08 Prevention of Air and Noise Pollution: the first paragraph of the Standard Specifications is modified to add:

Burning of trash, debris, plant material, wood, or any other waste materials will not be allowed. The contractor shall dispose of such materials in accordance with the requirements of Subsection 107.11.

(104SWEPA, 3/11/13)

SECTION 104 - SCOPE OF WORK:

104.09 Prevention of Landscape Defacement; Protection of Streams, Lakes and Reservoirs: of the Standard Specifications is revised to read:

(A) General:

The contractor shall give attention to the effect of the contractor's operations upon the landscape, and shall take care to maintain natural surroundings undamaged.

The contractor shall be responsible to implement the requirements of the National Pollutant Discharge Elimination System (NPDES) for erosion and sediment control due to stormwater runoff during construction, as specified in the "General Permit for Stormwater Discharges from Construction Activities," issued by the Environmental Protection Agency (EPA). That document is hereinafter referred to as the NPDES general permit, and is available online at <http://www.epa.gov/npdes>.

Useful information related to stormwater controls and erosion and sediment control measures is presented in the Construction General Permit Fact Sheet, available from the EPA website, and in ADOT's "Erosion and Pollution Control Manual," available on the Department's website at http://www.azdot.gov/inside_adot/OES/Water_Quality/Stormwater/Erosion_Pollution_Control_Manual.asp.

The work shall include providing, installing, maintaining, removing and disposing of erosion and sediment control measures such as gravel filter berms, dikes, catch basin inlet protection, end-of-pipe filtering devices, silt fences, dams, sediment basins, earth berms, netting, geotextile fabrics, slope drains, seeding, stream stabilization, and other erosion control devices or methods. Erosion control, as hereinafter referenced, shall be deemed to include control of erosion and the mitigation of any resulting sediment. Erosion control

measures may be temporary or permanent. The contractor shall also be responsible for the preparation and processing of all documents required in the NPDES general permit.

The plans will include preliminary erosion control measures and additional information to be included in the project's Stormwater Pollution Prevention Plan (SWPPP), as specified in Subsection 104.09(B). The contractor, with input from the Engineer, shall finalize the SWPPP, file a Notice of Intent (NOI), implement the SWPPP, and file a Notice of Termination (NOT), all as described herein.

Except for the NOI, all signatures required of the contractor by the NPDES general permit, including those required for the NOT, SWPPP, and inspection reports, shall be provided by a duly authorized representative of the contractor, as defined in said permit. Signature of the NOI shall be by a responsible corporate officer, also as defined in the NPDES general permit.

No clearing, grubbing, earthwork, or other work elements affected by the erosion control requirements in the SWPPP shall be started until the SWPPP has been approved, the NOI's completed and filed in accordance with Subsection 104.09(C), including the specified review time, and the SWPPP implemented, including installation of the sediment control devices required in Subsection 104.09(B) along the downgradient boundaries of the project.

The contractor shall obtain a copy of the NPDES general permit, and include it with the SWPPP.

Submission of the contractor's NOI shall certify that the contractor and its subcontractors have read and will comply with all provisions of the NPDES general permit.

(B) Stormwater Pollution Prevention Plan (SWPPP):

The plans will include descriptions of temporary and permanent erosion control measures; a project description; percent impervious area, including paved areas, rooftops, and other similar surfaces, for both pre-construction and post-construction conditions; runoff coefficients; preliminary site map; inspection schedule; and site-specific diagrams indicating proposed locations where erosion and sediment control devices or pollution control measures may be required during successive construction stages. The plans may also include an initial schedule detailing the proposed sequence of construction and related erosion control measures.

The contractor shall review the preliminary information, including the erosion control features and phasing, and evaluate all SWPPP requirements for adequacy in addressing pollution prevention during construction, and prepare a draft SWPPP for review by the Engineer.

The Department has reviewed the applicable EPA website for Region 9, and contacted the regional TMDL (Total Maximum Daily Load) team leader for any information concerning an EPA-established or approved TMDL for waters in the area of this project. Based on the review, the Department has determined that no waters located near this project have an EPA-established or approved TMDL. The contractor shall include the Department's

information in the draft SWPPP. The contractor may accept this information or make its own assessment of potential TMDL impacts for the project and provide the required information in the draft SWPPP. Should the contractor conduct its own assessment and discover facts that indicate the Department's information may be erroneous, the contractor shall notify the Engineer as soon as possible. Should no assessment from the contractor be provided in the SWPPP, the contractor's signature on the NOI and the finalized SWPPP shall certify that it supports the Department's information regarding TMDLs for the project.

The Department has determined that no Endangered Species will be impacted by this project. The Engineer will provide the contractor with documentation regarding Endangered Species at the time of approval of the contractor's erosion control coordinator. The contractor shall review the information and include the documentation with the draft SWPPP. The contractor may accept this information or make its own assessment of potential impacts on Endangered Species for the project and provide the required information in the draft SWPPP. Should the contractor conduct its own assessment and discover facts that indicate the Department's information may be erroneous, the contractor shall notify the Engineer as soon as possible. Should no assessment from the contractor be provided in the SWPPP, the contractor's signature on the NOI and the finalized SWPPP shall certify that it supports the information regarding Endangered Species for the project.

The contractor shall designate an erosion control coordinator, in accordance with Subsection 104.09(D), to be responsible for finalization and implementation of the SWPPP, as well as all other applicable requirements of the NPDES general permit. The contractor's erosion control coordinator (also abbreviated herein as ECC) shall be approved as specified in Subsection 104.09(D) before the draft SWPPP can be finalized and submitted to the Engineer. After approval, the contractor shall designate the erosion control coordinator as an authorized representative of the contractor in accordance with the NPDES General Permit. Documentation of the delegation of a duly authorized representative shall be included as part of the SWPPP.

The draft SWPPP shall include all information and permit requirements specified in the NPDES general permit, including a general location map and finalized site map; identification of receiving waters and wetlands within one mile of the project; a list of potential pollutant sources; inspection schedule; any onsite or off-site material storage sites; additional or modified stormwater, erosion, and sediment controls; provisions for maintaining undisturbed natural buffers or providing for equivalent erosion and sediment controls when a surface water is located within 50 feet of the project's earth disturbances, as required in said permit; procedures for maintaining temporary and permanent erosion control measures; and a list of the contractor's pollution prevention practices. The draft SWPPP shall also be consistent with applicable federal, tribal, state, or local programs. The contractor shall coordinate with the Engineer on all such additional information.

The draft SWPPP shall also identify any potential for discharge into a municipal separate storm sewer system (MS4), including the name of the owner/operator of the system.

Unless otherwise approved by the Engineer, the contractor shall not expose a surface area of greater than 750,000 square feet to erosion through clearing and grubbing, or excavation

and filling operations within the project limits until temporary or permanent erosion control devices for that portion of the project have been installed and accepted by the Engineer.

The contractor shall indicate each 750,000 square-foot sub-area in the draft SWPPP, along with proposed erosion control measures for each sub-area. The draft SWPPP shall also include the sequence of construction for each sub-area, and installation of the required temporary or permanent erosion control measures.

Temporary or permanent stabilization of disturbed ground surfaces must be initiated immediately when earth-disturbing activities have ceased temporarily or permanently on any portion of the construction site. Such stabilization shall prevent sediment loss from the disturbed surface. The contractor shall give installation of permanent erosion control measures priority over reliance on temporary measures.

Permanent erosion control measures and drainage structures shall be installed as soon as possible in the construction sequencing of the project, preferably concurrent with construction of the related sub-area or drainage device. However, except as specified in the NPDES general permit and approved by the Engineer, erosion control measures shall be completed no later than 14 calendar days after construction activity has temporarily or permanently ceased for the affected sub-area.

Sediment control along the downgradient boundaries of the project shall also be required. The plans may include sediment basins or traps to provide such drainage control. Should the plans not include measures for perimeter sediment control, the draft SWPPP shall either propose construction of such basins, if attainable, or specify other sediment control measures, such as silt fences. All such devices shall be installed and implemented before any clearing and grubbing of the site is initiated.

Sediment basins may be included on the plans as part of the preliminary information, or proposed as part of the final SWPPP. No additional payment will be made for sediment basins included on the plans as part of the preliminary information, the cost being considered as included in contract items. New sediment basins approved for inclusion in the final SWPPP will be paid for in accordance with Subsection 109.04(D).

Should sediment basins be proposed for downstream perimeter control, or for sediment control elsewhere on the project, the contractor shall determine the feasibility and capacity of such basins in accordance with the requirements of the NPDES general permit. If attainable and if approved by the Engineer, such basins shall be included in the final SWPPP.

The contractor shall comply with the requirements of the NPDES general permit should the use of polymers, flocculants, or other treatment chemicals be proposed in conjunction with such basins, or elsewhere on the project.

The draft SWPPP shall also identify and address erosion control at on-site fueling operations, waste piles, material storage sites, and off-site dedicated asphalt and concrete plants, contractor-use areas, storage areas, and support activity locations which are used solely for the project and are covered by the NPDES general permit. The draft SWPPP shall

also accommodate all requirements for the contractor's pollution prevention procedures specified in Subsection 104.09(E). In addition, the SWPPP shall specifically identify the erosion control measures proposed by the contractor during any vegetation removal and salvaging phases of the project (such as during timber harvesting or native plant salvaging).

The draft SWPPP shall specify the mechanism whereby revisions may be proposed by the contractor or the Engineer throughout the project and incorporated into the plan, including review and approval procedure. The Engineer and contractor shall jointly approve and sign each revision to the SWPPP before implementation. Any subsequent submittals required by the contractor to revise or update the SWPPP will require at least 48 hours for review.

Contractors and subcontractors responsible for implementing all or portions of the SWPPP shall be listed in the draft SWPPP, along with the measures for which they are responsible. The SWPPP shall also list the names of the construction personnel with day-to-day operational control of those activities necessary to ensure compliance with the SWPPP or other conditions of the NPDES general permit.

The contractor shall submit two copies of the draft SWPPP, including all information specified herein, to the Engineer at the preconstruction conference if possible, but not later than 14 calendar days from the Department's approval of the contractor's Erosion Control Coordinator.

The Engineer will provide the contractor with the following forms at the preconstruction conference:

- Maintenance, inspection, and site-monitoring report forms; and
- Other record keeping forms and procedures, as needed.

Within 10 calendar days from the SWPPP submittal, the Engineer and contractor will jointly review the contractor's draft SWPPP, and the contractor shall include any additional revisions directed by the Engineer. The finalized SWPPP shall meet the terms and conditions of the NPDES general permit, and be compatible with construction sequencing and maintenance of traffic plans.

When agreement has been reached, the Engineer and contractor's authorized representative will sign the finalized SWPPP. The Engineer's signature will constitute approval of the SWPPP. Upon approval of the SWPPP, the Engineer and the contractor shall each file a Notice of Intent (NOI) as specified in Subsection 104.09(C). At this time the Engineer will also provide a copy of the Department's NOI to the contractor.

After the time period specified in Subsection 104.09(C), the contractor shall implement the requirements of the SWPPP. No clearing, grubbing, earthwork, or other work elements affected by the erosion control requirements in the SWPPP, shall be started until the SWPPP has been approved, the NOI's completed and filed in accordance with Subsection 104.09(C), including the specified review time, and the SWPPP implemented.

The contractor shall maintain all related erosion control elements in proper working order throughout the project. Work under this section also includes inspections, record-keeping, and implementation of pollution prevention practices, all as described herein.

The approved SWPPP shall be updated whenever a change in design, construction method, operation, maintenance procedure, or other activity may cause a significant effect on the discharge of pollutants to surface waters, or when a change is proposed to the personnel responsible for implementing any portion of the SWPPP. The SWPPP shall also be amended if inspections indicate that the SWPPP is ineffective in eliminating or significantly reducing pollutants in the discharges from the construction site. All necessary modifications to the SWPPP shall be made within seven calendar days following the inspection that revealed the deficiency.

The contractor's erosion control coordinator shall maintain the signed SWPPP, a copy of the NPDES general permit, signed NOI, acknowledgement letter(s) from the EPA, completed inspection forms, and other NPDES records in a three-ring binder. The erosion control coordinator shall maintain a current copy of the SWPPP, including all associated records and forms, at the job site from the time construction begins until completion of the project. The SWPPP shall be available for inspection by the EPA, FHWA, and other entities identified in the NPDES general permit, and for use by the Engineer. The erosion control coordinator shall provide copies of any or all of such documents to the Engineer upon request. When requested, such copies shall be provided within three working days of the request.

The SWPPP (including inspection reports) and all data used to complete the NOI and NOT shall be provided to the Department at the completion of the project. The contractor shall retain its own records for a period of at least three years from the filing of the contractor's NOT.

No condition of the NPDES general permit or the SWPPP shall release the contractor from any responsibilities or requirements under other environmental statutes or regulations.

The contractor shall provide copies of the SWPPP upon request to the EPA, U.S. Fish and Wildlife Service, affected local agencies, or operators of affected municipal separate storm sewer systems.

(C) Notice of Intent (NOI):

After the project Storm Water Pollution Prevention Plan (SWPPP) has been approved, the Engineer and contractor will each complete separate Notice-of-Intent (NOI) forms for the project. The NOI prepared by the contractor includes a certification statement which must be signed and dated by an authorized representative of the contractor, as defined in the NPDES General Permit, and must include the name and title of that authorized representative. The contractor's completed NOI form will be submitted to the Engineer for approval prior to submission to EPA. After approval, the contractor shall submit the NOI to the EPA through the eNOI system at <http://cfpub.epa.gov/npdes/stormwater/cgpenoi.cfm>.

The contractor will be authorized to begin implementation of the approved SWPPP 14 calendar days after acknowledgement of receipt of both NOIs is posted on EPA's NPDES website at <http://cfpub.epa.gov/npdes/stormwater/cgpnosearch.cfm>, and a copy of the contractor's approved NOI, indicating an active status, has been provided to the Engineer, unless notified by EPA that additional information regarding Endangered Species or other issues is required. Should additional information be required, the contractor is not authorized to begin SWPPP-related work until notice of eligibility is received from the EPA.

No adjustments to the contract time or costs will be made for the 14 calendar-day review period specified above. If the EPA approval process requires more than 14 calendar days, the contractor may seek, and the Engineer may grant, a non-compensable extension of time in accordance with the terms of Subsection 108.08. The time extension shall not exceed 14 calendar days.

The contractor shall post a sign or other notice near the entrance to the construction site containing the NPDES Permit tracking number and a contact name and phone number of the person designated by the contractor to provide additional project information.

At any time after authorization, the EPA may determine that the contractor's stormwater discharges may cause or contribute to non-attainment of any applicable water quality standards. If the EPA makes that determination, the contractor will be notified in writing. The contractor shall develop a supplemental erosion control action plan describing SWPPP modifications to address the identified water quality concerns. If the written notice from the EPA requires a response, failure to respond in a timely manner constitutes a permit violation. All responses shall be in accordance with the EPA general permit.

(D) Contractor's Erosion and Pollution Control Coordinator:

(1) General Requirements:

The contractor shall designate a competent person as the contractor's erosion and pollution control coordinator (referred to elsewhere herein as erosion control coordinator or ECC) responsible for finalizing the draft SWPPP from the preliminary information included with the plans. The erosion control coordinator shall also be responsible for implementing, monitoring, and revising the approved SWPPP throughout the project, for making the required inspections, and for implementing any other permit requirements stipulated in the NPDES general permit. The person shall be knowledgeable in the principles and practice of erosion and sediment controls, and possess the skills to assess conditions at the site that could impact stormwater quality and the effectiveness of the contractor's erosion control measures used to control the quality of the stormwater discharges.

Stormwater runoff from construction activities may contaminate adjacent bodies of water, or otherwise exceed water quality standards, and result in possible major civil and/or criminal penalties. Therefore the Engineer will closely consider the qualifications of the contractor's erosion control coordinator. The contractor shall not assume that the person proposed as erosion control coordinator will be acceptable to the Department merely because the experience and education requirements listed herein have been met.

The contractor bears all risks and liabilities for the failure of its erosion control coordinator to properly implement the requirements of the NPDES general permit.

The person shall be capable of identifying existing and predictable effects of the contractor's operations, and shall have complete authority to direct the contractor's personnel and equipment to implement the requirements described herein, including prompt placement of corrective measures to minimize or eliminate pollution and damage to downstream watercourses. The erosion control coordinator shall also be familiar with procedures and practices identified in the SWPPP, and shall ensure that emergency procedures are up to date and available at project sites.

The erosion control coordinator shall at all times be aware of the contractor's work activities, schedule, and effect of the work on the environment, and shall, at any time, be accessible to direct the contractor's personnel to replace or repair erosion control measures as necessary. Should the erosion control coordinator not be present at the project site on a full-time basis, the contractor shall establish procedures to ensure that its erosion control coordinator is promptly notified of any damage or displacement of the required erosion control measures, whether from construction, vandalism, or other causes. In addition, the contractor shall provide the Engineer with a phone number through which the erosion control coordinator can be contacted at any time, 24 hours a day, seven days a week, including holidays. The erosion control coordinator must be present at the jobsite within 24 hours of such call being placed.

The erosion control coordinator shall also be aware of and comply with all requirements of the NPDES general permit to address discharges at the site associated with the contractor's activities other than construction, including contractor staging areas, and other potential pollutant and off-site material storage and borrow areas.

The contractor shall be responsible to provide appropriate training to the contractor's personnel, including employees of any subcontractors, to ensure that all personnel understand requirements of the NPDES general permit and SWPPP that are applicable to their job functions.

Failure of the contractor to properly maintain the erosion control measures required in the approved SWPPP will be cause for the Engineer to reject the erosion control coordinator and issue a stop work order, as specified in Subsection 104.09(G).

(2) Certification Requirements:

The proposed erosion control coordinator shall have successfully completed the two-day (16 hour) "Erosion Control Coordinator" training class (hereinafter referred to as the training class) provided by the Associated General Contractors (Arizona Chapter), phone (602) 252-3926.

If a current training class certificate is more than three years old, the Erosion Control Coordinator will have until April 30, 2014 to successfully complete either a six-hour "Erosion Control Coordinator Refresher" class (hereinafter referred to as the refresher class), also

provided by the Associated General Contractors (Arizona Chapter), or the two-day training class specified above.

In order to maintain the training class certification, the refresher class shall be required every three years thereafter, prior to the expiration date listed on the previous certificate. After April 30, 2014, should more than three years elapse from completion of either the training class or refresher class, the contractor's proposed erosion control coordinator shall be required to successfully complete the two-day training class in order to again be eligible for consideration.

In addition, the proposed ECC shall have documented experience equal to a minimum of one year from either of the following two categories:

- (a) Experience in the development and implementation of Stormwater Pollution Prevention Plans (SWPPPs), as specified in the NPDES general permit referenced herein, or the Arizona Pollutant Discharge Elimination System (AZPDES) for highway construction projects. The proposed erosion control coordinator's experience shall demonstrate full-time responsibility for directly supervising construction personnel in the installation, monitoring, and maintenance of erosion control items.
- (b) Experience in re-vegetation or restoration of disturbed areas in environments similar to those on the project. Experience in temporary or permanent stabilization of disturbed areas will also be considered. The proposed erosion control coordinator's experience shall demonstrate full-time responsibility for directly supervising personnel in temporary or permanent re-vegetation or restoration of disturbed areas.

The contractor's documentation shall provide details indicating the types of relevant experience, and shall provide the number of months of each type of experience to be considered for approval.

The contractor's documentation shall also indicate that the proposed erosion control coordinator has completed the training class or refresher class. As specified above, the refresher class shall be required thereafter for each subsequent three-year period.

To be considered for approval, the contractor's documentation shall include a copy of the proposed erosion control coordinator's certification or registration. Should the proposed ECC be a registered Landscape Architect or Professional Engineer in the State of Arizona, the contractor shall also provide documentation indicating the types of relevant experience, and the number of years of each type of experience to be considered for approval. Should the ECC be certified in accordance with item 3 above, the contractor shall provide a copy of the wallet card supplied by EnviroCert International.

(3) Acceptance:

The contractor shall submit documentation indicating the qualifications of the proposed erosion control coordinator to the Engineer for approval within seven calendar days of the

notice of award of the contract. The Engineer will review the proposed candidate's information within seven calendar days. The contractor may begin development of the draft SWPPP from the preliminary information included with the plans prior to approval of the erosion control coordinator. However no clearing, grubbing, earthwork, or other work elements that, in the opinion of the Engineer, may be subject to the requirements of the NPDES general permit shall be started until the erosion control coordinator has been approved, the SWPPP finalized and implemented, and the NOIs completed and filed, all as specified herein.

(E) Pollution Prevention Practices and Requirements:

(1) General Requirements:

The SWPPP shall also specify the contractor's pollution prevention practices and requirements, including vehicle wash-down areas, onsite and off-site tracking control, protection of equipment storage and maintenance areas, methods to minimize generation of dust, and sweeping of highways and roadways related to hauling activities. The contractor shall show each planned location of service and refueling areas on the SWPPP's site map. Changes to the contractor's pollution prevention practices that are related to construction phasing shall also be shown on the SWPPP.

The contractor shall take aggressive actions, considering all conditions, to prevent pollution of streams, lakes, and reservoirs with fuels, oil, bitumens, calcium chloride, fresh Portland cement, fresh Portland cement concrete, raw sewage, muddy water, chemicals or other harmful materials. None of these materials shall be discharged into any channels leading to streams, lakes or reservoirs. The SWPPP shall include the implementation of spill prevention and material management controls and practices to prevent the release of pollutants into stormwater. The SWPPP shall also provide storage procedures for chemicals and construction materials; disposal procedures; cleanup procedures; the contractor's plans for handling such pollutants; and other pollution prevention measures as required.

Machinery service and refueling areas shall be located away from streambeds or washes, and in a manner which prevents discharges into streams or washes.

Waste materials from blasting, including explosives containers, shall be disposed of off-site in accordance with applicable federal regulations. Other waste materials, such as used cans, oils, machine and equipment parts, paint, hazardous materials, plastic and rubber parts, discarded metals, and building materials, shall be removed from the construction site and disposed of according to applicable state and federal regulations.

Where the contractor's working area encroaches on a running or intermittent stream, barriers shall be constructed and maintained between the working areas and the stream bed adequate to prevent the discharge of any contaminants. The SWPPP shall identify the location of streams that may be affected and the specific types of barriers proposed for protecting these resources.

Unless otherwise approved in writing by the Engineer, fording of running streams with construction equipment will not be permitted; therefore, temporary bridges or other structures shall be used whenever an appreciable number of crossings is necessary.

Temporary bridges or other structures proposed by the contractor shall be designed to accommodate the ten-year storm event if to remain in place for up to a one-year period. If a structure is planned to remain in place for longer than one year, the hydraulic conveyance may be subject to more stringent requirements. The contractor shall be responsible for all permits, authorizations, and environmental clearances that may be necessary to approve the use of such structures. The contractor shall submit the design and all required documentation to the Engineer for approval. The contractor is advised that the review and approval process for such structures could be lengthy. Unless otherwise provided for in the contract, the contractor shall be responsible for all costs associated with the design and construction of such structures. Also, no extension of contract time will be allowed for any review and approval periods, or for the time required to construct temporary bridges proposed by the contractor.

Mechanical equipment shall not be operated in running streams.

Material which is to be stockpiled or disposed of off-site shall be in accordance with Subsection 107.11.

Streams, lakes and reservoirs shall be cleared of all falsework, piling, debris or other obstructions resulting from the contractor's activities, inadvertently placed thereby or resulting from construction operations, within 24 hours from the time the obstruction was observed.

Spill prevention, containment and counter-measures shall be included in the SWPPP if the total fuel storage volume at any one site exceeds 1,320 gallons.

In the event of a spill of a hazardous material, the contractor shall follow the provisions of Subsection 107.07. In addition, the ECC shall modify the SWPPP as necessary within 14 calendar days of the discharge. The SWPPP shall be modified to include a description of the release, the circumstances leading to the release, and the date of the release.

The contractor shall assist in any efforts to clean up hazardous material spills, as directed by the Engineer or other authorities. Soil contaminated from spills shall be disposed of according to applicable state and federal regulations.

(F) Inspections:

(1) General:

The Engineer and the erosion control coordinator shall inspect the project at least every 14 calendar days, and also within 24 hours after any storm event of 0.25 inches or more. The inspections shall include disturbed areas that have been temporarily stabilized, areas used for storage of materials, locations where vehicles enter or exit the site, and all of the erosion and sediment controls included in the SWPPP. The contractor shall monitor rainfall on the

site with a commercially manufactured rain gauge accurate to within 0.10 inches of rain. Rainfall records shall be submitted to the Engineer on a weekly basis.

For each inspection, the contractor's erosion control coordinator shall document the inspections and sign the report as specified in the NPDES general permit. Copies of the completed reports shall be retained with the SWPPP for at least three years from the date of filing of the project Notice of Termination (NOT). The contractor shall also provide a copy of the report to the Engineer following each inspection.

All inspections shall be made jointly with the Engineer.

(2) Adjustments:

When deficiencies are noted during scheduled inspections, the contractor shall take immediate steps to make the required corrections and, if the deficiency doesn't require significant repair or replacement, complete such corrections to the satisfaction of the Engineer by the close of the next work day or by the next anticipated storm event, whichever is sooner. Deficiencies requiring installation of a new erosion or sediment control, or significant repair of an existing facility, shall be corrected within seven calendar days of observation, as specified in the NPDES general permit.

Direct inflows of sediment into a watercourse shall be corrected by the end of the same day or work shift in which the inflow was observed.

In accordance with Subsection 104.09(G), failure to implement adjustments within the specified time periods may be cause for the Engineer to reject the contractor's erosion control coordinator and issue a stop work order for the affected portions of the project.

(G) Non-Compliance:

The Engineer may reject the contractor's erosion control coordinator if, in the opinion of the Engineer, the conditions of the NPDES general permit or the approved SWPPP are not being fulfilled. Rejection of the contractor's erosion control coordinator shall be for failure to complete any of the following:

- (1) Should the Engineer determine that the SWPPP is not being properly implemented, the contractor will be notified in writing of such deficiencies. The contractor's erosion control coordinator shall fully implement, to the satisfaction of the Engineer, the requirements of the approved SWPPP within three working days.
- (2) Should any corrective measures required in Subsection 104.09(F)(2) not be completed within the time periods specified therein, the Engineer will notify the contractor in writing. The contractor's erosion control coordinator shall complete all required corrective measures within two calendar days of such notification, except that direct inflows of sediment into a watercourse shall be corrected within 24 hours.

- (3) Should the Engineer determine that routine maintenance of the project's erosion control measures is not being adequately performed, the contractor will be notified in writing. Within three working days, the contractor's erosion control coordinator shall demonstrate, to the satisfaction of the Engineer, that such steps have been taken to correct the problem.

In the event of the erosion control coordinator's failure to comply with any of the above requirements, the Engineer will direct the contractor to stop all affected work and propose a new erosion control coordinator as soon as possible. However, all erosion and pollution control items specified in the SWPPP shall be maintained at all times. No additional work on construction items affected by the SWPPP will be allowed until a new erosion control coordinator has been approved by the Engineer. The contractor will not be allowed compensation or an extension of contract time for any delays to the work because of the failure of the contractor's erosion control coordinator to properly fulfill the requirements of the approved SWPPP.

(H) Record of Major Construction And Erosion Control Measures:

The contractor shall keep records of the major construction activities, including the erosion control measures associated with these activities. In particular, the contractor shall keep a record of the following activities:

- The dates when major grading activities (including clearing and grubbing, excavation and embankment construction) occur in a particular area or portion of the site.
- The dates when specific erosion and sediment controls were initially installed for the major grading activities referenced above.
- The dates when construction activities cease in an area, temporarily or permanently.
- The dates when stabilization is initiated on an area.
- The dates when an area is stabilized, temporarily or permanently.

Such information shall be noted within two working days of the occurrence of any of the listed activities, and a copy of the report shall be included in the SWPPP. The contractor shall also provide one copy of such records, and any subsequent up-dated information, to the Engineer within three working days of completion or amendment of the report.

(I) Notice of Termination (NOT):

Upon final acceptance by the Engineer in accordance with Subsection 105.20, and as specified herein, the contractor shall complete and submit a Notice of Termination (NOT) for the project to the Engineer for review. After acceptance, the contractor shall submit the NOT through the EPA's electronic NOI homepage at <http://cfpub.epa.gov/npdes/stormwater/cgpenoi.cfm>.

The NOT submitted by the contractor includes a certification statement which must be signed and dated by an authorized representative of the contractor, as defined in the NPDES General Permit, and include the name and title of that authorized representative.

The contractor shall also provide one copy to the Engineer.

When the approved SWPPP includes the use of Class II seeding as an erosion control measure, seeded areas shall be maintained for 45 calendar days, as specified in the special provisions, and approved by the Engineer before the contractor's NOT can be submitted. Seeding, when used in the SWPPP as an erosion control measure, will not be considered as part of any Landscape Establishment Phase that may be included with the project.

(J) Measurement and Payment:

Measurement and payment for work specified in the SWPPP will be made in accordance with the requirements of Section 810. Erosion control and pollution prevention work specified in the contract which is to be accomplished under any of the other various contract items will be paid for as specified under those items.

If a force account pay item for erosion control is included in the bidding schedule, the contractor may be reimbursed for such additional erosion control items proposed by the contractor but not included with the plans or specifications. Such additional erosion control items must be approved in writing by the Engineer before use. Erosion control items approved by the Engineer will be paid in accordance with Subsection 109.04(D). No measurement or payment will be made for such additional items not approved by the Engineer.

No measurement or payment will be made to the contractor for time spent in preparing, reviewing, and revising the Stormwater Pollution Prevention Plan (SWPPP), or providing other required documentation, the cost being considered as included in the price of contract items. No measurement or payment will be made for inspections, training of personnel, the contractor's erosion control coordinator, or the contractor's pollution prevention practices and requirements, the costs being considered as included in contract items.

Unless otherwise specified, no measurement or payment will be made for maintenance of temporary and permanent erosion control measures, the cost being considered as included in contract items.

104.10 Contractor's Responsibility for Work: of the Standard Specifications is revised to read:

The contractor shall implement the requirements of the National Pollutant Discharge Elimination System (NPDES) for erosion control due to stormwater runoff during construction, as specified above in Subsection 104.09, Prevention of Landscape Defacement; Protection of Streams, Lakes, and Reservoirs.

Until final written acceptance of the project by the Engineer, the contractor shall have the charge and care thereof and shall take every precaution against injury or damage to any part thereof by the action of the elements, or from any other cause, whether arising from the execution or from the nonexecution of the work. The contractor shall rebuild, repair, restore and make good all injuries or damages to any portion of the work occasioned by any of the above causes before final acceptance. No reimbursement shall be made for work necessary due to the contractor's failure to comply with the requirements of the SWPPP.

Except as specifically provided under Subsection 104.04, in case of suspension of work from any cause whatever, the contractor shall be responsible for the project and shall take such precautions as may be necessary to prevent damage to the project and provide for normal drainage. The contractor shall also erect any necessary temporary structures, signs or other facilities. During such period of suspension of work, the contractor shall properly and continuously maintain in an acceptable growing condition all living material in newly established plantings, seedings and soddings, furnished under its contract and shall take adequate precautions to protect new tree growth and other important vegetative growth against injury.

(104STORM, 11/01/95)

SECTION 104 - SCOPE OF WORK:

104.11 **Damage by Storm, Flood or Earthquake:** Item (D), Idled Equipment and Remobilization, of the Standard Specifications is hereby deleted.

104.11 **Damage by Storm, Flood or Earthquake:** Items (E) and (F) of the Standard Specifications are revised to read:

(D) Payment for Repair Work:

The State will pay the cost of the repair work as determined in Subsection 109.04.

(E) Termination of Contract:

If the Department elects to terminate the contract, the termination and the determination of the total compensation payable to the contractor shall be governed by the provisions of Subsection 108.11, Termination of Contract for Convenience of the Department.

(104ENVIR, 03/17/08)

SECTION 104 - SCOPE OF WORK:

104.12 **Environmental Analysis:** of the Standard Specifications is revised to read:

The contractor shall prepare an environmental analysis for approval by the Engineer, under any of the following conditions:

- (A) If the contractor elects to provide material, in accordance with Section 1001, from a source that involves excavation.
- (B) If the contractor elects to use any site to set up a plant for the crushing or processing of base, surfacing, or concrete materials. The contractor may request an exemption from this requirement to provide an environmental analysis if all of the following conditions apply:

- (1) the site is exclusively used for the processing of materials,
 - (2) the site will not be used for excavation of borrow material,
 - (3) the site was developed as a processing area on or before January 1, 1999,
 - (4) the site is currently operating as a processing area, and
 - (5) the plant is located within that portion of the site that was disturbed prior to January 1, 1999.
- (C) If the contractor requests that the Engineer approve access to controlled access highway at points other than legally established access points.

The contractor may incorporate an existing environmental analysis approved after January 1, 1999, provided that the analysis is updated as necessary to be in compliance with current regulations and with the contractor's planned activities.

Regulatory changes, specification changes, or other reasons may preclude the approval of a materials source. The contractor acknowledges that the Department may refuse to approve a material source even if the Department had approved the source for other projects.

The environmental analysis shall include all areas of proposed excavation, crushing, processing, and haul roads. For the purposes of Subsection 104.12, a haul road is defined as any road on material excavation, processing, or crushing sites, and any road between the respective site and a public highway that may be used by the contractor.

The contractor shall promptly advise the Engineer that it is preparing the environmental analysis and shall submit it upon completion. The contractor should anticipate needing a minimum of 30 calendar days to prepare the environmental analysis. The contractor shall allow a minimum of 45 calendar days after submittal, or subsequent resubmittal, to the Department for the Department to review the environmental analysis and to consult with the appropriate jurisdictions and/or agencies. At the end of the review period, the Engineer will notify the contractor whether or not the environmental analysis is acceptable.

If the approval of the environmental analysis causes a delay to a controlling activity of the project, the contractor may seek, and the Engineer may grant, an extension of time in accordance with the terms of Subsection 108.08. The time extension shall not exceed 30 working days for a working-day contract, or 45 calendar days for a calendar-day project. The time extension will not be considered unless the contractor can show evidence of due diligence in pursuing the environmental analysis. No time extension will be granted for a fixed completion date contract.

The Environmental analysis shall address all environmental effects, including, but not limited to, the following:

- (1) The location of the proposed source and haul road, and the distance from the source to either an existing highway or an established alignment of a proposed Federal, State or County highway along with vicinity maps, sketches or aerial photographs.

- (2) The ownership of the land.
- (3) The identity and location of nearby lakes, streams, parks, wildlife refuges or other similar protected areas.
- (4) The former use, if known, of the source, and haul road and their existing condition.
- (5) The identification of present and planned future land use, zoning, etc., and an analysis of the compatibility of the removal of materials with such use.
- (6) The anticipated volume of material to be removed; the width, length and depth of the excavation; the length and width of the haul road, and other pertinent features and the final condition in which the excavated area and haul road will be left, such as sloped sides, topsoil replaced, the area seeded, etc.
- (7) The archaeological survey of the proposed source prepared by a person who meets the Secretary of the Interior's Professional Qualification Standards (48 FR 44716) and possesses a current permit for archaeological survey issued by the Arizona State Museum (ASM). The survey shall be prepared in a State Historic Preservation Office standardized format. The survey shall identify all historic properties within the area of potential effect (APE), as defined by the National Historic Preservation Act (36 CFR 800.4). This includes the materials source, processing area, and the haul road. Additionally, the survey report shall identify the effects of the proposed source on any historic properties within the APE, and recommend measures to avoid, minimize, or mitigate those effects.
- (8) If the proposed source, or haul road will utilize Prime and Unique Farm land or farm land of statewide importance, a description of such remaining land in the vicinity and an evaluation whether such use will precipitate a land use change.
- (9) A description of the visual surroundings and the impact of the removal of materials on the visual setting.
- (10) The effect on access, public facilities and adjacent properties, and mitigation of such effects.
- (11) The relocation of business or residences.
- (12) Procedures to minimize dust in pits and on haul roads and to mitigate the effects of such dust.
- (13) A description of noise receptors and procedures to minimize impacts on these receptors.

- (14) A description of the impact on the quality and quantity of water resulting from the materials operation shall be provided. The potential to introduce pollutants or turbidity to live streams and/or nearby water bodies shall be addressed. Measures to mitigate potential water quality impacts shall be coordinated through the Environmental Protection Agency (EPA) for sites located on tribal land, and the Arizona Department of Environmental Quality (ADEQ) for sites located on non-tribal land.
- (15) A description of the impact on endangered or threatened wildlife and plants and their habitat. The analysis of potential impact to plants and wildlife shall be coordinated through the Arizona Game and Fish Department and U.S. Fish and Wildlife Service. Compliance with the Arizona Native Plant Law shall be coordinated through the Arizona Commission of Agriculture and Horticulture.
- (16) A discussion of the effects of hauling activities upon local traffic and mitigating measures planned where problems are expected.
- (17) A description of the permits required, such as zoning, health, mining, land use, flood plains (see Section 404 of the Clean Water Act), etc.
- (18) The effect of removing material and/or stockpiling material on stream flow conditions and the potential for adverse impacts on existing or proposed improvements within the flood plain which could result from these activities. Measures to mitigate potential water quality impacts shall be coordinated through the Environmental Protection Agency (EPA) for sites located on tribal land, and the Arizona Department of Environmental Quality (ADEQ) for sites located on non-tribal land.

Guidance in preparing the environmental analysis is available on the Department's Internet Website through the Environmental Planning Group, or by calling Environmental Planning Group at 602-712-7767.

(104MAGDET, 05/03/16)

SECTION 104 SCOPE OF WORK:

104.15(A) General: the first three paragraphs of the Standard Specifications are revised to read:

All new underground utility facilities, including service connections, placed within ADOT right-of-way by the contractor must be magnetically detectable with standard locating instruments. The contractor shall place continuous detectable tracer wire with all those underground utility facilities that lack a continuous and integral metallic component capable of detection by standard locating instruments.

Tracer wire will not be required for power cables and wires, telephonic or electronic communications (other than fiber optic lines), or for landscape irrigation lines smaller than

two inches in diameter. For Salt River Valley Water Users Association (S.R.V.W.U.A.) irrigation facilities, no tracer wire will be required if Salt River Project provides their own tracer system.

Tracer wire will be required for non-metallic pipe such as corrugated high density polyethylene plastic pipe (HDPE), steel reinforced high density thermoplastic ribbed pipe, corrugated polypropylene plastic pipe (PP), vitrified clay pipe (VCP), and for polyvinyl chloride pipe (PVC) two inches in diameter and larger. Tracer wire will be required where the metallic component is encased within the pipe, such as reinforced concrete pipe (RCP), rubber gasket reinforced concrete pipe (RGRCP), and steel cylinder concrete pipe.

104.15(B) Materials: the first sentence of the first paragraph of the Standard Specifications is revised to read:

Tracer wire shall be solid copper wire, American Wire Gauge (AWG) No. 12 or larger.

(105PLNS, 10/18/10)

SECTION 105 CONTROL OF WORK:

105.03 Plans and Working Drawings: the thirteenth paragraph of the Standard Specifications is revised to read:

All working drawings or prints shall be 22 inches in height and 34 inches in length. There shall be 1 1/4-inch margins on the left and right sides, and 3/4-inch margins on the top and bottom. A blank space, four inches wide by three inches high, shall be left inside the margin in the lower right hand corner. All drawings shall be made in such a manner that clear and legible copies can be made from them. When half-size copies are required, they shall be provided on standard 11 by 17 inch sheets.

(105FNL, 03/11/11)

SECTION 105 CONTROL OF WORK:

105.20(B) Final Acceptance: the second paragraph of the Standard Specifications is revised to read:

If, however, the inspection discloses any work, in whole or in part, as being unsatisfactory or not complete, the Engineer will give the contractor written notice of the unsatisfactory or incomplete work and the contractor shall immediately correct such work. In such case, the Engineer will also give the contractor written notice as to whether or not the work is substantially complete.

Final acceptance will not be made until all completed plans and working drawings as required in Subsection 105.03 have been submitted and deemed acceptable by the Engineer. In addition, final acceptance will not be made until all "Certification of Payments

to DBE Firms” affidavits, as required in the contract documents, have been submitted and deemed acceptable by the Engineer and the Civil Rights Office.

(106SRP, 05/29/08)

SECTION 106 - CONTROL OF MATERIALS:

106.01 Source of Supply and Quality Requirements: of the Standard Specifications is revised to read:

Unless otherwise specified, the contractor shall be responsible for furnishing all water required for construction. Water obtained from sources within the Salt River or Verde River watersheds and administered by Salt River Project, or obtained from Salt River Valley Water Users Association (S.R.V.W.U.A.) delivery canals within the Phoenix metropolitan areas, shall be subject to the following conditions:

For water obtained from rivers, streams, lakes, or other sources within the watershed, the contractor shall execute a Construction Water Exchange Permit. Water obtained from surface water sources or wells in close proximity to a river, stream, or lake located within the watershed may also require a Construction Water Exchange Permit.

For water obtained from S.R.V.W.U.A. canals, the contractor shall contact Salt River Project to determine the most appropriate delivery method and associated permits and costs. As an example, a Permit for Operation of Mobile Tank Trucks shall be required for water pumped into mobile water trucks.

The contractor shall contact Salt River Project at the address shown below to determine whether its anticipated water sources will be subject to Salt River Project regulations and, if necessary, the appropriate requirements, permits, and fees.

Salt River Project
Water Contract Accounting & Data Services SSW302
PO Box 52149
Phoenix, Arizona 85072-2149
(602) 236-2255
(602) 236-3313
Fax (602) 236-5082

No water shall be obtained from sources as specified herein until the contractor has furnished the Engineer with a completely executed copy of the appropriate permits.

(106QCMAT, 05/03/16)

SECTION 106 CONTROL OF MATERIAL:

106.04(A) General: the fourth and fifth paragraphs of the Standard Specifications are revised to read:

The sampling, testing, and acceptance of materials shall be in accordance with the requirements of the specifications, in conjunction with the following:

- The ADOT Materials Testing Manual.
- The ADOT Materials Practice and Procedure Directives Manual.
- Applicable Federal, AASHTO, or ASTM specifications or test designations.
- Applicable specifications or test designations of other nationally recognized organizations.

Unless otherwise specified, whenever a reference is made to an Arizona Test Method or an ADOT Materials Practice and Procedure Directive, it shall mean the test method or practice and procedure directive in effect on the bid opening date.

Any reference to the ADOT Materials Policy and Procedure Directives elsewhere in the contract documents shall be understood to mean ADOT Materials Practice and Procedure Directives.

106.04(B) Contractor Quality Control: the second paragraph of the Standard Specifications is revised to read:

Certain construction items may require additional quality control measures, as specified in Subsection 106.04(C). When so specified, the contractor shall provide all the personnel, equipment, materials, supplies, and facilities necessary to obtain samples and perform the tests listed in the applicable section and as given in Subsection 106.04(C). Specific contractor quality control requirements will be shown in the applicable construction items. Payment for such additional work shall be in accordance with the Special Provisions, and will be included in Bidding Schedule Item 9240170.

When the specifications do not require specific contractor quality control measures, the provisions given in Section 106.04(C) do not apply. Bid Item 9240170 will not be included in the Bidding Schedule.

106.04(C)(2) Quality Control Laboratory: the first paragraph is revised to read:

All field and laboratory sampling and testing shall be performed by a laboratory or laboratories approved by the Department. The requirements for approval of laboratories are specified in ADOT Materials Policy and Procedure Directive No. 19, "ADOT System for the Evaluation of Testing Laboratories". Approved laboratories, and the test methods for which they are approved to perform, are listed in the "ADOT Directory of Approved Materials Testing Laboratories". Approved test methods listed in the "ADOT Directory of Approved Materials Testing Laboratories" do not include field sampling and testing procedures. When field sampling and testing procedures are performed, the appropriate valid Arizona Technical Testing Institute (ATTI) and/or American Concrete Institute (ACI) certification(s) are required. ADOT Materials Policy and Procedure Directive No. 19, "ADOT System for the Evaluation of Testing Laboratories" and the "ADOT Directory of Approved Materials

Testing Laboratories” may be obtained on the internet from the ADOT Materials Quality Assurance Section website.

106.04(C)(6) Weekly Quality Control Reports: of the Standard Specifications is revised to read:

The contractor shall submit Weekly Quality Control Reports to the Engineer. The weekly reports shall be complete and accurate, and shall state the types of work which have been performed during the report period. The report shall also include the process control measures taken to assure quality. The report shall provide sample identification information for materials tested during the report period, including sample number, date sampled, sample location, first and last name of person obtaining sample, and original source of material. The report shall also provide the results for all required tests and any retests, corrective actions, and other information relevant to quality control. The report shall include daily diaries for each day of testing, a weekly summary, the ADOT TRACS number, and the testing laboratory’s project identification number.

Except as stated in the following paragraph, the weekly quality control report shall be prepared using standard forms provided by the Department. The standard forms are available on the Department’s website at www.azdot.gov. After accessing the Department’s website, select “Business”, “Engineering and Construction”, “Construction and Materials”, “Contractor Information”, “Forms and Documents”, and then “Weekly Quality Control Forms”. Except for the daily diaries, all documentation and information required on the forms shall be typed. Daily diaries may be hand-written if acceptable to the Engineer. The weekly report shall be submitted to the Engineer in paper form with a transmittal letter signed by the contractor’s quality control manager.

In lieu of using the standard weekly quality control forms available on the Department’s website, the contractor or testing laboratory may prepare the weekly report using proprietary or other software, if acceptable to the Engineer, provided that all required information is included, the format is comparable to the Department’s standard format, and the report is submitted in paper form with the required transmittal letter.

The report period shall end at midnight of each Friday, and the report shall be submitted to the Engineer no later than 5:00 p.m. of the following Wednesday. The Engineer will verify that the report is timely, complete, and accurate.

Reports that are not submitted by the above-referenced deadline shall be considered delinquent. Reports that are submitted by the above-referenced deadline, but are not complete and accurate, shall also be considered delinquent. In either case monies shall be deducted from the contractor’s monthly estimate in accordance with the requirements for Contractor Quality Control, as specified in these special provisions.

(106CERT, 09/14/12)

SECTION 106 CONTROL OF MATERIAL:

106.05 Certificates: of the Standard Specifications is revised to read:

(A) General:

The contractor shall submit to the Engineer an original or copy of either a Certificate of Compliance or a Certificate of Analysis, as required, prior to the use of any materials or manufactured assemblies for which the specifications require that such a certificate be furnished.

Certificates shall be specifically identified as either a "Certificate of Compliance" or a "Certificate of Analysis".

The Engineer may permit the use of certain materials or manufactured assemblies prior to, or without, sampling and testing if accompanied by a Certificate of Compliance or Certificate of Analysis, as herein specified. Materials or manufactured assemblies for which a certificate is furnished may be sampled and tested at any time, and, if found not in conformity with the requirements of the plans and the specifications, will be subject to rejection, whether in place or not.

Certificates of Compliance and Certificates of Analysis shall comply with the requirements specified herein, the ADOT Materials Testing Manual, and applicable ADOT Materials Policy and Procedure Directives.

(B) Certificate of Compliance:

A Certificate of Compliance shall be submitted on the manufacturer's or supplier's official letterhead, and shall contain the following information:

- (1) The current name, address, and phone number of the manufacturer or supplier of the material.
- (2) A description of the material supplied.
- (3) Quantity of material represented by the certificate.
- (4) Means of material identification, such as label, lot number, or marking.
- (5) A statement that the material complies in all respects with the requirements of the cited specifications. Certificates shall state compliance with the cited specification, such as AASHTO M 320, ASTM C 494; or specific table or subsection of the Arizona Department of Transportation Standard Specifications or Special Provisions. Certificates may cite both, if applicable.

- (6) A statement that the individual identified in item seven below has the legal authority to bind the manufacturer or the supplier of the material.
- (7) The name, title, and signature of the responsible individual. The date of the signature shall also be given.

Each of the first six items specified above shall be completed prior to the signing of the certificate as defined in item seven. No certificate will be accepted that has been altered, added to, or changed in any way after the authorized signature has been affixed to the original certificate. However, notations of a clarifying nature, such as project number, contractor, or quantity shipped are acceptable, provided the basic requirements of the certificate are not affected.

A copy or facsimile reproduction of the original certificate will be acceptable; however, the original certificate shall be made available upon request.

(C) Certificate of Analysis:

A Certificate of Analysis shall include all the information required for a Certificate of Compliance and, in addition, shall include the results of all tests required by the specifications.

(106APL, 02/10/12)

SECTION 106 - CONTROL OF MATERIAL:

106.14 Approved Products List: of the Standard Specifications is revised to read:

The Approved Products List is a list of products which have been shown to meet the requirements of these Standard Specifications. The Approved Products List is maintained by the Department and updated monthly. Copies of the most current version are available on the internet from the ADOT Research Center, through its Product Evaluation Program.

The contractor shall verify that any products chosen for use from the Approved Products List are selected from the version which was most current at the time of the bid opening.

Unless otherwise specified in the Special Provisions, products not appearing on the Approved Products List at the time of the bid opening may be used if they meet the requirements of the plans and specifications.

When the Special Provisions limit product selection to only those listed on the Approved Products List, other products will not be evaluated or approved.

(106DMAT, 2/15/11)

SECTION 106 - CONTROL OF MATERIALS: of the Standard Specifications is modified to add:

106.15 Domestic Materials and Products:

Steel and iron materials and products used on all projects shall comply with the current "Buy America" requirements of 23 CFR 635.410.

All manufacturing processes to produce steel and iron products used on this project shall occur in the United States. Raw materials used in manufacturing the steel and iron products may be foreign or domestic. Steel or iron not meeting these requirements may be used in products on this project provided that the invoiced cost to the contractor for such steel products incorporated into the work does not exceed either one-tenth of one percent of the total (final) contract cost or \$2,500, whichever is greater.

Any process which involves the application of a coating to iron or steel shall occur in the United States. These processes include epoxy coating, galvanizing, painting, or any other coating which protects or enhances the value of covered material.

The requirements specified herein shall only apply to steel and iron products permanently incorporated into the project. "Buy America" provisions do not apply to temporary steel items, such as sheet piling, temporary bridges, steel scaffolding and falsework, or to materials which remain in place at the contractor's convenience.

The contractor shall furnish the Engineer with Certificates of Compliance, conforming to the requirements of Subsection 106.05, which state that steel or iron products incorporated in the project meet the requirements specified. Certificates of Compliance shall also certify that all manufacturing processes to produce steel or iron products, and any application of a coating to iron or steel, occurred in the United States.

Convict-produced materials may not be used unless the materials were produced prior to July 1, 1991 at a prison facility specifically producing convict-made materials for Federal-aid construction projects.

(107INS, 7/10/12)

SECTION 107 - LEGAL RELATIONS AND RESPONSIBILITY TO PUBLIC:

107.14 Insurance: the first paragraph of the Standard Specifications is revised to read:

Prior to the execution of the contract, the contractor shall file with the Department a certificate or certificates of insurance evidencing insurance as required by this contract has been placed with an insurer authorized to transact insurance in the State of Arizona pursuant to ARS Title 20, Chapter 2, Article 1, or with a surplus lines insurer approved and

identified by the Director of the Department of Insurance pursuant to ARS Title 20, Chapter 2, Article 5.

All insurers shall have an "A.M. Best" rating of A- VII or better.

The State of Arizona in no way warrants that the above-required minimum insurer rating is sufficient to protect the contractor from potential insurer insolvency.

The contractor's submission of the required insurance certificates constitutes a representation to the Department that:

1. The contractor has provided a copy of these specifications to every broker who has obtained or filed a certificate of insurance and has communicated the necessity of compliance with these specifications to the broker; and
2. To the best of the contractor's knowledge, each certificate of insurance and each insurance coverage meets the requirements of these specifications.

The contractor shall provide the Department with certificates of insurance (ACORD form or equivalent acceptable to the State of Arizona) as required by the contract. The certificates for each insurance policy shall be signed by a person authorized by that insurer.

(107SWRSP, 01/28/03)

SECTION 107 - LEGAL RELATIONS AND RESPONSIBILITY TO PUBLIC:

107.15 Contractor's Responsibility for Utility Property and Services: of the Standard Specifications is revised to read:

(A) General:

The contractor's attention is directed to the requirements of Arizona Revised Statutes Section 40-360.21 through .29 requiring all parties excavating in public streets, alleys or utility easements to first secure the location of all underground facilities in the vicinity of the excavation.

The contractor shall review copies of existing ADOT permits, subject to availability, prior to start of construction, to assist the contractor in determining the location of any utilities, which the Department may have record of and which are not otherwise shown in the contract documents. Utility locations obtained from the Department are for information only and shall not relieve the contractor of responsibility for identifying, locating and protecting any existing utility lines. Copies of permits may be obtained from the ADOT Area Permit Supervisor in the District in which a project is located.

The contractor shall contact the owners of the various utilities prior to the start of construction and shall obtain from them any information pertaining to existing utilities that will either supplement information shown on the project plans or will correct any such

information that may be incorrect. The contractor shall furnish the Engineer with evidence that the contractor has contacted the utility companies. Such evidence shall be submitted at the preconstruction conference, and shall include a copy of the information received from each utility as a result of such contacts.

If the contractor learns from either the owner of the utility or from any other source of the existence and location of properties of railway, telegraph, telephone, fiber optics cable, water, sewer, septic tanks or systems, electric, gas and cable television companies either omitted from or shown incorrectly on the project plans, the contractor shall immediately notify the Engineer and shall not disturb the utilities. Relocation or adjustment of such utilities, if deemed necessary, will be either performed by others or shall be performed by the contractor in accordance with the provisions of Subsection 104.02.

The contractor shall cooperate with the owners of any underground or overhead utility lines in their removal and rearrangement operations in order that these operations may progress in a reasonable manner, that duplication of rearrangement work may be reduced to a minimum and that services rendered by these parties will not be unnecessarily interrupted.

Temporary or permanent relocation or adjustment of any utility line or service connection desired by the contractor for its convenience shall be its responsibility. The contractor shall obtain the approval of both the Engineer and the utility company and upon approval shall make all necessary arrangements with the utility company and shall bear all costs in connection with such relocation or adjustment. The contractor shall also submit a Sewer Discharge Prevention Plan, as specified in Subsection 107.15(C)(1), describing each anticipated relocation or adjustment involving existing sanitary sewer lines. No work on a particular facility shall begin until all approvals for that facility have been received.

(B) Contractor Qualifications for Water and Sewer Lines:

Breakage of active sanitary sewer lines may result in the potential spread of disease, contamination of the site and any adjacent bodies of water, and other hazards to the public. Substantial cleanup costs may be associated with such breakage, as well as possible major civil and/or criminal penalties. Therefore, the Engineer will closely consider the qualifications of any personnel proposed by the contractor to oversee or perform work involving active sanitary sewer lines. The contractor shall not assume that the personnel assigned to perform such work will be acceptable to the Department merely because they meet the experience requirements listed herein.

The contractor, or the subcontracting firm assigned to perform the water and sewer work, shall have a minimum of five years of experience in the installation and construction of underground large diameter (18-inch or above) water and sewer improvements.

In addition, the key personnel assigned by the contractor to perform any work on water or sewer lines, whether from the prime contractor or a subcontracting firm, shall also have at least five years of experience in the installation and construction of underground large diameter (18-inch or above) water and sewer improvements. A minimum of two such people shall be designated by the contractor. The designated personnel may have the title of

foreman or superintendent; however, at least one of these people shall be present at all times at the location of any work being performed at or near an active sanitary sewer line.

For both the firm and the key personnel, the experience shall include working with and around water and sewer utility lines that are in service. The contractor shall submit the following documentation to the Engineer for review and approval:

- (1) A list indicating that the designated key project personnel have at least five years of applicable experience, as specified above. The list shall be accompanied with resumes for each of the key people. The resumes shall include the following information, and demonstrate compliance with the specified requirements:
 - (a) Detailed relevant experience for a minimum of two projects, including project description, date of work, actual work performed by the individual, and references (a minimum of one for each project).
 - (b) Level of applicable formal training.
 - (c) Number of years of relevant experience in performing like construction.
- (2) A list of water and sewer construction projects completed by the firm performing the water or sewer work, as specified above, indicating a minimum of five years of applicable experience. Include the dates of work, type of work, description of the project, amount of work performed by the contractor/subcontractor, and the name and phone number of a contact with the owning company or agency for which the work was completed.
- (3) List of equipment that will be used for this project. The list shall include, as a minimum, equipment type, date of manufacture, and if contractor-owned or rented.
- (4) A list of all violations and citations in the past five years of applicable water and wastewater laws and statutes for both the prime contractor and the subcontractor responsible for the utility work.

The contractor shall submit this documentation to the Engineer for approval at least 21 calendar days prior to any anticipated work involving active sanitary sewer lines, whether new or existing.

(C) Protection of Existing Utility Lines:

At points where the contractor's operations are adjacent to right-of-way properties or easements for railway, telegraph, telephone, water, sewer, electric, gas and cable television companies, hereinafter referred to as utilities, or are adjacent to other facilities and property, damage to which might result in considerable expense, loss, inconvenience, injury or death, work shall not be commenced until all arrangements necessary for the protection thereof have been made.

The exact locations and depths of all utilities that are underground or the location of those on or near the surface of the ground which are not readily visible shall be determined. Such locations shall be marked in such a manner so that all workmen or equipment operators will be thoroughly apprised of their existence and location. It will be the contractor's responsibility to see that every effort possible has been made to acquaint those actually involved in working near utilities not only with the type, size, location and depth, but with the consequences that might follow any disturbance. No trenching or similar operation shall be commenced until the Engineer is satisfied that every possible effort has been taken by the contractor to protect utilities.

The contractor shall coordinate with others working near new or existing sewer lines or other utilities on the procedures to be followed to prevent damaging of these utilities.

(1) Sewage Discharge Prevention Plan (SDPP):

For any work which may impact active sanitary sewer pipes, whether new or existing, the contractor shall prepare a Sewage Discharge Prevention Plan (SDPP) which shall describe the contractor's procedures and work plan for such lines. The Sewage Discharge Prevention Plan shall also describe the precautions that the contractor shall take to prevent unplanned breakage or spills, and the procedure which the contractor shall follow if breakage or a spill occurs.

The contractor's method of work described in the SDPP shall ensure that any work done in or near any active sewer line is performed in a safe and controlled manner resulting in no accidental discharges. As a minimum, the contractor's equipment and procedures shall be appropriate for the intended work, and shall conform to standard industry practices.

The SDPP shall include information, as specified below, for all portions of the project which involve the following work activities, and for any other element of work which may involve contact with an active sanitary sewer line:

- Interrupt, divert, relocate, plug, or abandon a sewer line or service connection, or
- Brace, or tie into a sewer line or service connection.

Construction activities in the vicinity of active sanitary sewer lines or service connections shall also be included in the SDPP if any of the following conditions exist:

- (1) Any work crossing beneath the pipe, at any angle, regardless of vertical separation.
- (2) Any work crossing over the pipe, at any angle, within two feet of the top of pipe.
- (3) Work located parallel to the pipe within the following areas:
 - (a) For the area from the bottom of the pipe to two feet above the top of the pipe, any work within two feet horizontally of the pipe wall.

- (b) For the area below the bottom of the pipe, any work located below an imaginary line beginning at the pipe springline and progressing downward at a slope of 1.5 feet vertically to 1.0 feet horizontally.

The contractor's Sewage Discharge Prevention Plan shall address each of the items tabulated below, as applicable, for every location where construction activity will involve an active sanitary sewer line.

(2) Required Elements of the Sewage Discharge Prevention Plan:

The following elements shall be addressed in the SDPP:

- (a) Describe the proposed work in general, including the reasons for the work, scope, objectives, locations, dates, and estimated times the work will be conducted. Include project plan sheets detailing the proposed work, and indicating the peak flowrates of active sewer lines, determined as specified.
- (b) For all existing sanitary sewer pipes, determine whether the lines are active or abandoned, and the peak flowrates of lines in service, as provided by the owner of the utility.
- (c) List the key personnel (crew foreman, superintendent, and manager) and field office that are proposed to perform the work (include phone numbers).
- (d) Describe the work in step-by-step detail for each location, including excavation plans and how both the new and existing structures and utilities will be identified and protected.
- (e) Provide a detailed listing of any hardware, fittings, pipe plugs, flex couplings, tools, and materials needed to accomplish the work, and note the status of these items (on-hand, to-be-fabricated, on-order with expected delivery date, etc.). Include any manufacturer's specifications or recommendations, especially for any pipe plugs, sewer line fittings, and patching materials.
- (f) List all major equipment to be used to perform the work. Include in this item any pumps that will be used to perform the work and the rated capacity of the pumps at the anticipated suction head.
- (g) List all equipment to be used in the event of an unplanned release and specify how the equipment will be used. The locations of standby pumps shall be specified in this item. The plan shall indicate that all standby equipment to be used in the event of an unplanned discharge can be delivered to the site and put into service within two hours of identification of any unplanned flow.
- (h) List the safety equipment to be used, and describe any unique safety procedures. Cite the applicable OSHA standards covering the work.

- (i) Describe any contingency plans the contractor will implement in the event of unplanned releases and/or damage to existing facilities. List all personnel and subcontractors that will be responsible for responding to unplanned releases or damaged lines. Provide qualifications for all such personnel and subcontractors, including education, formal training, and relevant experience.
- (j) Describe how the public will be protected during the work, and include or cite any applicable traffic control plans.
- (k) Describe the quality control procedures that will be used in the field.
- (l) Discuss how temporary plugs or flow control devices will be secured, monitored, and removed.

The SDPP shall be in written form, and shall include any diagrams or sketches necessary for clarity. When possible, diagrams and sketches should be shown using the applicable project plan sheets.

The contractor shall modify the SDPP as necessary throughout the project to include any new or revised information relevant to the items listed above. The contractor shall resubmit the revised SDPP to the Engineer for approval in each case.

(3) Sewage Discharge Prevention Plan Approval:

The SDPP shall be submitted to the Engineer at least 21 calendar days before any work involving an active sewer line is to be done. The Engineer will review the plan, solicit comments from the owner/operator of the sewer line, and return the plan to the contractor within 14 calendar days from original submittal.

No work involving active sanitary sewer lines shall be done until a final SDPP meeting all the requirements specified in Subsection 107.15(C)(2) has been approved by the Engineer.

Approval of the contractor's Sewage Discharge Prevention Plans, personnel, or construction methods and operation shall not relieve the contractor from its responsibility to safely perform the work included in this contract, nor from its liability for damage resulting, either directly or indirectly, from its work performed under this contract.

(D) Service Connections:

(1) General:

In the event of interruption to water, sewer, or utility services as a result of accidental breakage or as a result of lines being exposed or unsupported, the contractor shall promptly notify the proper authority and shall cooperate with the said authority in the restoration of service. When service is interrupted, repair work shall be continuous until the service is restored. No work shall be undertaken around fire hydrants until provisions for continued service have been approved by the local fire authority.

(2) Unidentified Water and Sewer Connections:

The contractor shall protect unidentified, undamaged water or sewer service connections encountered during excavation. The contractor shall immediately notify the Engineer when an unidentified service connection is encountered.

The contractor shall immediately repair unidentified water or sewer service connections that are damaged during excavation. Any damaged service connections shall be reported to the Engineer, including all remedial actions taken.

(E) Repairing Damaged Lines:

When the operations of the contractor result in damage to any utility line or service connection, the location of which has been brought to the contractor's attention, the contractor shall assume full responsibility for such damage.

Should an unplanned breakage occur in an active sewer line as a result of the contractor's operations, the contractor shall immediately notify the Engineer, and begin repairs to halt any flows and restore normal service, in accordance with the procedures described in the approved Sewage Discharge Prevention Plan. The contractor shall also immediately notify the affected utility company and the appropriate regulatory agencies. The contractor shall be responsible for repairing the damaged pipe, restoring any interruptions in service, and cleaning up the affected areas within 24 hours of the beginning of the spill. Sewage discharge damage assessments, as specified in Subsection 107.15(F), will be charged to the contractor for any unplanned breakage which results in a discharge.

The contractor shall be responsible to repair any breakage, in accordance with requirements of the broken line's owner/operator, and clean up the site per applicable codes and regulations of the Environmental Protection Agency, OSHA, Arizona Department of Environmental Quality (ADEQ), and all other agencies' specifications, at no additional cost to the Department.

(F) Sewage Discharge Damage Assessments:

The Department will assess liquidated damages in accordance with the Table 1 below for each 24-hour period, or portion thereof, for each unplanned breakage that occurs in an active sanitary sewer line as a result of the contractor's operation. The rate of liquidated damages assessed is based on the type and quantity of effluent discharged as determined by the Engineer.

These liquidated damages do not relieve the contractor from any of its responsibilities under the contract, including any liquidated damages that may be assessed under Subsection 108.09 for late completion of the project.

Liquidated damages assessed by the Department will be independent of any penalties imposed by others.

The contractor acknowledges that Regulatory agencies may assess or impose civil or criminal penalties on the contractor resulting from sewer discharges.

The Department will not be responsible for any civil or criminal penalties, fines, damages, or other charges imposed on the contractor by any regulatory agency or court for sewage discharges that are a result, directly or indirectly, of the contractor's work performed under this contract.

Table 1		
Liquidated Damages (each 24 hour period, or portion thereof)		
Volume of Discharge	Raw Sewage or Industrial Wastewater	Treated Effluent
Less than 10,000 gallons	\$5,000.00	\$1,000.00
10,000-99,999 gallons	\$10,000.00	\$2,000.00
100,000-1 million gallons	\$25,000.00	\$3,000.00
Greater than 1 million gallons	\$40,000.00	\$5,000.00

Liquidated damages shall be assessed for each 24 hour period, or portion thereof, until the contractor has completed all of the following tasks:

- (A) Stopped the discharge.
- (B) Repaired the damaged pipe.
- (C) Restored normal service.
- (D) Fully cleaned and disinfected the site to the satisfaction of the Engineer.

REDUCTION OF LIQUIDATED DAMAGES: Upon completion of tasks A, B, and C above, and prior to completion of Task D, the liquidated damages assessed for the current 24-hour period shall be at the rate shown in Table 1. However, for each subsequent 24-hour period, the assessment will be one half of the rate shown in Table 1.

Damages will continue at the reduced rate until the site has been fully cleaned and disinfected to the satisfaction of the Engineer.

As an example, the amounts assessed each 24-hour period for an unplanned discharge of 20,000 gallons of raw sewage, in which the contractor completes tasks A, B, and C within the second 24-hour period but does not complete full cleanup until the third 24-hour period, will be as follows:

First 24-hour period: \$10,000.00

Second 24-hour period: \$10,000.00

Third 24-hour period: \$5,000.00

For this example, the total liquidated damage assessment will be \$25,000.00 (\$10,000 + \$10,000 + \$5,000).

(107UTIL, 05/03/16)

SECTION 107 - LEGAL RELATIONS AND RESPONSIBILITY TO PUBLIC:

107.15 Contractor's Responsibility for Utility Property and Services: of the Standard Specifications is modified to add:

The contractor shall be ADOT's Blue Stake field locator, and perform all requirements as prescribed in A.R.S. 40-360.21 through .29, for all underground facilities that have been installed by the contractor on the current project, until the project is accepted by ADOT.

At least two working days prior to commencing excavation, the contractor shall call BLUE STAKE CENTER, between the hours of 7:00 a.m. and 4:30 p.m., Monday through Friday for information relative to the location of buried utilities. The number to be called is as follows:

Projects In Maricopa County (602) 263-1100

Copies of existing ADOT permits, subject to availability, may be obtained from the ADOT Area Permit Supervisor as listed below:

CENTRAL DISTRICT

(602) 712-7522 2140 W. Hilton Avenue
(602) 712-6954 Phoenix, AZ 85009

"The following agencies and utility companies have facilities in the area but are not anticipated to be in conflict:

Utility Company	Contact	Address	Phone	Email
Maricopa County DOT	Steve Poole	209 W Durango St, Phoenix AZ 85009	(602) 506-8660	
No conflicts.				
Saddleback Communications	John Aker	10190 E McKellips Rd Scottsdale, AZ 85256	(480) 850-7037	
An overhead line will be undergrounded prior to this construction.				
Southwest Gas	Jeremy Elser Yvonne Aguirre	1600 E. Northern Avenue, Mail Code 420-586 Phoenix, AZ 85020	(602)484-5649	Yvonne.aguirre@swgas.com
Southwest Gas has facilities in the project area that extend on the east side of Longmore Rd. A conflict is not anticipated with one culvert crossing north of Oak St.				

The following utility company has facilities in conflict with the proposed construction, and anticipates relocating before construction commences:

Salt River Project	Jolie Donahue	SRP Mail Services Mail Station XCT 341 2727 East Washington Street Phoenix, AZ 85034	(602)236-3782	jolie.donahue@srpnet.com
Salt River Project has an overhead line from Left Station 12+22 to Left Station 89+93 (39 poles) that will be undergrounded by November 30, 2016 prior to this construction. All poles are to be topped and remain in place for the existing communication line. New street light poles at approximate Left Stations 12+48,14+62, 17+61, 19+87, 21+26, and 23+14(6 ea.) will be installed prior to this construction.				

The following utility company has facilities in conflict with the proposed construction and anticipates certain adjustments and relocations during construction as shown on plans and specified in these special provisions :

Utility Company	Contact	Address	Phone	Email
Salt River Pima-Maricopa Indian Community	Rick McFarlin	10005 E Osborn Rd Scottsdale, Arizona 85301	(480)362-6993	Rick.McFarlin@SRPMIC-nsn.gov
<p>The Salt River Pima-Maricopa Indian Community has sewer, water, and irrigation facilities in the project area. This project will adjust three fire hydrants located at Left Station 11+65, 25+83, and 31+89 and one water valve located at Lift Station 11+88 as shown in the project construction documents.</p>				

It shall be the contractor’s responsibility to determine the exact location of the utilities prior to any construction operations, and to notify the above mentioned utility companies at least two (2) working days prior to commencing any work on the project.”

(107FINA, 09/19/12)

SECTION 107 - LEGAL RELATIONS AND RESPONSIBILITY TO PUBLIC:

107.19 Federal Immigration and Nationality Act: of the Standard Specifications is revised to read:

(A) General:

The contractor and all subcontractors shall comply with all federal, state and local immigration laws and regulations, as set forth in Arizona Executive Order 2005-30, relating to the immigration status of their employees who perform services on the contract during the duration of the contract. The State shall retain the right to perform random audits of contractor and subcontractor records or to inspect papers of any employee thereof to ensure compliance.

The contractor shall include the provisions of Subsection 107.19 in all its subcontracts.

In addition, the contractor shall require that all subcontractors comply with the provisions of Subsection 107.19, monitor such subcontractor compliance, and assist the Department in any compliance verification regarding any subcontractor.

(B) Compliance Requirements for A.R.S. § 41-4401, Government Procurement, E-Verify Requirement; Sanctions:

By submission of a bid, the contractor warrants that the contractor and all proposed subcontractors are and shall remain in compliance with:

- (1) All federal, state and local immigration laws and regulations relating to the immigration status of their employees who perform services on the contract, and
- (2) A.R.S. Section 23-214, Subsection A (That subsection reads: "After December 31, 2007, every employer, after hiring an employee, shall verify the employment eligibility of the employee through the E-Verify program.").

A breach of a warranty regarding compliance with immigration laws and regulations shall be deemed a material breach of the contract, and the contractor and subcontractors are subject to sanctions specified in Subsection 107.19(D).

Failure to comply with a State audit process to verify the employment records of contractors and subcontractors shall be deemed a material breach of the contract, and the contractor and subcontractors are subject to sanctions specified in Subsection 107.19(D).

(C) Compliance Verification:

The State may, at any time and at its sole discretion, require evidence of compliance from the contractor or subcontractor.

Should the State request evidence of compliance, the contractor shall complete and return the State Contractor Employment Record Verification Form and Employee Verification Worksheet, provided by the Department, no later than 21 days from receipt of the request for such information.

Listing of the compliance verification procedure specified above does not preclude the Department from utilizing other means to determine compliance.

The State retains the legal right to inspect the papers of any employee who works on the contract to ensure that the contractor or subcontractor is complying with the warranty specified in Subsection 107.19(B).

(D) Sanctions for Non-Compliance:

For purposes of this paragraph, non-compliance refers to either the contractor's or subcontractor's failure to follow immigration laws or to the contractor's failure to provide records when requested. Failure to comply with the immigration laws or to submit proof of compliance constitutes a material breach of contract. At a minimum, the Department will reduce the contractor's compensation by \$10,000 for the initial instance of non-compliance by the contractor or a subcontractor. If the same contractor or subcontractor is in non-compliance within two years from the initial non-compliance, the contractor's compensation will be reduced by a minimum of \$50,000 for each instance of non-compliance. The third instance by the same contractor or subcontractor within a

two-year period may result, in addition to the minimum \$50,000 reduction in compensation, in removal of the offending contractor or subcontractor, suspension of work in whole or in part or, in the case of a third violation by the contractor, termination of the contract for default.

In addition, if a contractor is in non-compliance three times within a two-year period, the Department will revoke the contractor's prequalification for a minimum of one year. Subcontractors and suppliers who are in non-compliance three times within a two-year period will be prohibited from participating in Department contracts for a minimum of one year.

Subcontractors who are in non-compliance three times within a two-year period, and who are prequalified with the Department as prime contractors, will also have such prequalifications revoked for a minimum of one year.

After the minimum one-year suspension, contractors, subcontractors, and suppliers may be considered eligible to participate in Department contracts, but only after successful demonstration, to the satisfaction of the Department, that their hiring practices comply with the requirements specified herein. If considered eligible, contractors shall be required to re-apply for prequalification and be accepted prior to bidding on Department contracts. Subcontractors interested in bidding on Department contracts as prime contractors shall also be required to re-apply for prequalification and be accepted prior to bidding. For purposes of considering suspension: (1) non-compliance by a subcontractor does not count as a violation by the contractor, and (2) the Department will count instances of non-compliance on other Department contracts.

The sanctions described herein are the minimum sanctions; in case of major violations the Department reserves the right to impose any sanctions up to and including termination, revocation of prequalification, and prohibition from participation in Department contracts, regardless of the number of instances of non-compliance.

Contractors, subcontractors, and suppliers may appeal the sanctions to the State Engineer. That appeal must be in writing and personally delivered or sent by certified mail, return receipt requested, to the State Engineer. The appeal must be received by the State Engineer no later than seven calendar days after the Department's determination. The State Engineer shall promptly consider any appeals and notify the interested party of the State Engineer's findings and decision. The State Engineer's decision shall be considered administratively final.

Any delay resulting from a compliance verification or a sanction under this subsection is a non-excusable delay. The contractor is not entitled to any compensation or extension of time for any delays or additional costs resulting from a compliance verification or a sanction under subsection 107.19.

An example of the minimum sanctions under this subsection is presented in the following table:

Offense by:			Minimum Reduction in Compensation
Contractor	Subcontractor A	Subcontractor B	
First			\$10,000
	First		\$10,000
	Second		\$50,000
		First	\$10,000
	Third		\$50,000 *
* Will, in addition, result in removal of the subcontractor, prohibition from participating in Department contracts, and revocation of any Department prequalifications that the subcontractor may have obtained.			

(108SUBLT, 02/22/16)

SECTION 108 PROSECUTION AND PROGRESS:

108.01 Subletting of Contract: the fifth paragraph of the Standard Specifications is revised to read:

The Department may also refuse to approve any entity as a subcontractor or supplier for any of the reasons for which it could refuse to allow an entity to submit a bid, suspend the entity from bidding, or declare the entity non-responsible.

108.01 Subletting of Contract: the sixth paragraph of the Standard Specifications is modified to add:

- (G) Verification that an alternative dispute resolution process to resolve payment and prompt payment disputes is included in each subcontract. The alternative dispute resolution process shall include a means of prompt escalation beyond the project level and provide the opportunity to hire a mediator.

108.01 Subletting of Contract: the seventh paragraph of the Standard Specifications is revised to read:

The Engineer will not consent to subletting of any portion of the contract until:

- (a) The Engineer receives a copy of the subcontract or lower tier subcontract, and
- (b) The AZUTRACS Registration Number for the subcontractor has been provided.

The contractor's schedule shall allow seven calendar days for the Department's subcontract review of each subcontract.

The Engineer's consent shall in no way be construed to be an endorsement of the subcontractor or its ability to complete the work in a satisfactory manner.

If a subcontractor, of any tier, begins work on the contract prior to the contractor submitting the required documentation and receiving consent from the Engineer, the Department will withhold \$1,000 from monies due or becoming due the contractor as liquidated damages. The liquidated damages will be withheld for each subcontractor, of any tier, that starts work without the consent of the Engineer. These liquidated damages shall be in addition to all other retention or liquidated damages provided for elsewhere in the contract.

If a subcontractor, of any tier, is found working on the project without an approved contract the Engineer will immediately stop work on the subcontract. Work shall not resume until all required documentation is submitted and approved by the Engineer. The contractor shall not be entitled to additional compensation or an extension of contract time for any delays to the work because of the contractor's failure to submit the required documentation.

SECTION 108 PROSECUTION AND PROGRESS:

108.02 Start of Work: is revised to read:

Work shall not be started until the contract has been executed by both the contractor and the Department.

The contractor shall not begin construction work prior to Monday, January 23, 2017. Contract time will be charged commencing on that date.

(108PRCN, 05/03/16)

SECTION 108 PROSECUTION AND PROGRESS:

108.03 Preconstruction Conference: the seventh paragraph of the Standard Specifications is revised to read:

The contractor shall submit a traffic control plan in accordance with Subsection 701-1. The contractor shall designate an employee who is competent and experienced in traffic control to implement and monitor the traffic control plan. The qualifications of the designated employee must be satisfactory to the Engineer. Such designated employee shall have successfully completed a recognized traffic control supervisor training program. The traffic control supervisor training provided by the American Traffic Safety Services Association (A.T.S.S.A.) or the International Municipal Signal Association (IMSA) shall be acceptable. Training through other programs must be approved in advance by the Engineer. The contractor shall submit proof that the proposed individual has completed an approved training program at the preconstruction conference. The training shall be current, and must be valid throughout the duration of the project. In order to remain current with the Department, the traffic control supervisor training shall be completed or renewed every four years.

108.03 Preconstruction Conference: the fifth paragraph of the Standard Specifications is hereby deleted.

(108TIME, 10/12/01)

SECTION 108 - PROSECUTION AND PROGRESS:

108.08 Determination and Extension of Contract Time: the first paragraph of the Standard Specifications is revised to read:

Construction Phase:

The time allowed for the completion of the work included in the Construction Phase of the contract will be **80** working days.

Landscape Establishment Phase:

The time allowed for the completion of the work included in the Landscape Establishment Phase of the contract will be **90** calendar days.

The total of the time allowed for the Construction Phase plus the Landscape Establishment Phase will be known as the "Contract Time."

(108FCWT, 7/01/14)

SECTION 108 - PROSECUTION AND PROGRESS:

108.09 Failure to Complete the Work on Time: the Schedule of Liquidated Damages table of the Standard Specifications is revised to read:

SCHEDULE OF LIQUIDATED DAMAGES			
Original Contract Amount		Liquidated Damages Per Day	
From More Than:	To and Including:	Calendar Day or Fixed Date:	Working Day:
\$ 0	\$ 100,000	\$ 430	\$ 600
100,000	500,000	640	900
500,000	1,000,000	1,000	1,400
1,000,000	2,000,000	1,290	1,800
2,000,000	5,000,000	1,860	2,600
5,000,000	10,000,000	2,710	3,800
10,000,000	20,000,000	2,790	3,900
20,000,000	30,000,000	3,570	5,000
30,000,000	60,000,000	5,500	7,700
60,000,000	90,000,000	9,430	13,200
90,000,000	-----	9,430	13,200

(109FORCE, 02/20/08)

SECTION 109 - MEASUREMENT AND PAYMENT:

109.04(D)(3)(a) Rental Rates (Without Operators): of the Standard Specifications is modified to add:

The Rental Rate Blue Book adjustment factor (F) will be 0.933.

(109RET, 7/01/14)

SECTION 109 - MEASUREMENT AND PAYMENT:

109.06(C) Payroll Submittals: of the Standard Specifications is revised to read:

The contractor shall submit payrolls electronically through the internet to the Department's web-based certified payroll tracking system. This requirement shall also apply to every lower-tier subcontractor that is required to provide certified payroll reports.

If, by the 15th of the month, the contractor has not submitted its payrolls for all work performed during the preceding month, the Engineer will provide written notification of the discrepancies to the contractor. For each payroll document that the contractor fails to submit within 10 days after the written notification, the Department will retain \$2,500.00 from the progress payment for the current month. The contractor shall submit each complete and correct payroll within 90 days of the date of written notification. If the payroll is complete and correct within the 90-day time frame, the Department will release the \$2,500.00 on the next monthly estimate. For each payroll that is not acceptable until after the 90-day time frame, the Department will only release \$2,000.00 of the \$2,500.00 retained. The Department will retain \$500.00 as liquidated damages. Such \$500.00 retentions will not relieve the contractor of its responsibility to provide each required payroll, complete and correct, as specified above. These liquidated damages shall be in addition to all other retention or liquidated damages provided for elsewhere in the contract.

109.07 Partial Payment for Material on Hand: the fifth paragraph of the Standard Specifications is hereby deleted.

(201MTBRN, 10/18/10)

SECTION 201 - CLEARING AND GRUBBING:

201-3.02 Removal and Disposal of Materials: the second and third paragraphs of the Standard Specifications are revised to read:

In the disposal of all tree trunks, stumps, brush, limbs, roots, vegetation and other debris, the contractor shall comply with the requirements of Title 49, Chapter 3, of the Arizona Revised Statutes, and with the Rules and Regulations for Air Pollution Control, Title 18,

Chapter 2, Article 6, adopted by the Arizona Department of Environmental Quality pursuant to the authority granted by the Arizona Administrative Code.

Burning of trash, debris, plant material, wood, or any other waste materials will not be allowed.

(202RMVL, 10/03/14)

SECTION 202 - REMOVAL OF STRUCTURES AND OBSTRUCTIONS:

202-3.07 Removal of Embankment Curb: the second paragraph of the Standard Specifications is revised to read:

Asphaltic concrete obtained from sources approved by the Engineer shall be used to fill and repair voids on the existing pavement surface that result from the removals.

202-3.09 Removal of Guardrail: the first paragraph of the Standard Specifications is revised to read:

All guardrail to be removed shall become the property of the contractor unless otherwise specified on the project plans. Guardrail removal shall include complete removal of posts, concrete foundations, and foundation tubes, and subsequent backfill of the remaining holes with moist soil in compacted lifts, as approved by the Engineer.

202-5 Basis of Payment: the first paragraph of the Standard Specifications is revised to read:

Payment for the accepted quantities of removal of structures and obstructions will be made by lump sum or by specific removal items or by a combination of both. Payment for removal of structures and obstructions not listed in the bidding schedule, but necessary to perform the construction operations designated on the project plans or specified in the Special Provisions shall be considered as included in the prices of contract items.

When saw cutting is not included as a contract pay item, full compensation for any saw cutting necessary to perform the construction operations designated on the plans shall be considered as included in the price of contract items.

ITEM 2020053 – REMOVE (FIRE HYDRANT):

Description:

The work under this item shall consist of furnishing all labor, equipment, and materials to remove existing fire hydrant assemblies at locations shown on the project plans and in accordance with these special provisions.

Construction Requirements:

The contractor shall be responsible for making proper application prior to construction of all services within SRPMIC and shall coordinate the fire hydrant removal construction with Stuart Wilson, Water Section Manager (480-362-2735). The Contractor shall contact SRPMIC at least 72 hours prior to removal of the fire hydrants.

The contractor shall remove existing fire hydrant and all pipe fittings per Section 202 and 808 of the ADOT Standard Specifications. The existing fire hydrant assemblies shall be removed and disposed of the project limits per Section 202 of the Standard Specifications.

Any damage to the remaining water line or the fire hydrant caused by the contractor's operations, as determined by the Engineer, shall be repaired or replaced at no additional cost to the Department.

Method of Measurement:

REMOVE EXISTING FIRE HYDRANT will be measured by the unit each for each fire hydrant assembly removed and disposed of as specified herein and shown on the project plans.

Basis of Payment:

REMOVE EXISTING FIRE HYDRANT, measured as provided above, will be paid for at the contract unit price per each, which price shall be full compensation for the work, complete in place, including associated pipe fittings, necessary excavation, backfill, removal and disposal, and as specified herein and shown on the project plans.

ITEM 2020061 – REMOVE AND RELOCATE MAIL BOXES:

Description:

The work under this item consists of furnishing all labor, equipment and material necessary to remove, transport, store and reinstall existing mail boxes and posts onto all new foundations as shown in the project plans and specified herein. The work shall include any necessary excavation, backfilling and compaction to restore the excavated or disturbed areas to finished grade.

Construction Requirements:

The removal of the mail boxes and posts shall be in accordance with the requirements of Subsection 202-3.06 of the Standard Specifications.

The contractor shall remove and dispose of existing foundation in accordance with the requirements of section 202 of the ADOT Standard Specifications.

Mail boxes and posts damaged during removal and reinstallation operation shall be replaced at the contractor's expense. The contractor shall reinstall all mail boxes with new hardware. The mail box shall be reinstalled per Section 608 of the ADOT Standard Specifications. The original mail box post may be reinstalled, however, if the post is not able to be reused, it shall be replaced with in kind post.

Reinstalling the mail boxes shall be in consultation with the property owners, through the Engineer, the Scottsdale Post Master Joe J. Zarate at (480) 998-9356, and the Salt River Pima Maricopa Indian Community a minimum of 72 hours prior to relocation.

Backfill and compaction shall be in accordance with Subsection 202-3.01 of the Standard Specifications.

Method of Measurement:

Remove and Relocate Mail Boxes will be measured by the unit each for each mail box and post removed and relocated as specified herein and shown on plans.

Basis of Payment:

Remove and Relocate Mail Boxes, measured as provided above, will be paid for at the contract unit price per each, which price shall be full compensation for the work, complete in place, including removal and disposal of existing foundation, reinstallation of existing post and mail box, new hardware and foundation and if required new posts, and as specified herein and shown on the project plans.

(207DSP, 02/20/08)

SECTION 209 FURNISH WATER: of the Standard Specifications is hereby deleted.

SECTION 207 BLANK of the Standard Specifications is revised to read:

SECTION 207 DUST PALLIATIVE:

207-1 Description:

The work under this section shall consist of applying all water required for the control of dust as considered necessary for the safety and convenience of the traveling public, and for the reduction of the dust nuisance to adjacent property.

207-2 Blank

207-3 Construction Requirements:

The use of pressure pumps and spray bars on all sprinkling equipment used for the application of dust palliative will be required. The use of gravity flow spray bars and splash plates will not be permitted.

Water applied for dust control shall be as approved or directed by the Engineer. The contractor shall provide appropriate equipment for effective control of dust.

207-4 Method of Measurement and Basis of Payment:

No measurement will be made for application of dust palliative, including furnishing water and all necessary equipment and labor, the cost being considered as included in contract items.

SECTION 303 AGGREGATE SUBBASES AND AGGREGATE BASES:

303-2 Materials: of the Standard Specifications is modified to add:

The Aggregate Base may consist of one or more of the following:

1. The Aggregate Base shall be Class 2 and shall be as specified in Section 303 of the Standard Specifications.
2. Aggregate Base consisting of 1 part (by volume) new AB Class 2 as specified in Section 303 of the Standard Specifications, and 1 part (by volume) milled AC, 100% passing the 1 ½" sieve. The milled AC shall contain no underlying base or subgrade materials. The mixture of AB and milled AC shall be thoroughly blended to the satisfaction of the Engineer prior to compaction.
3. Aggregate Base consisting of 1 part (by volume) new AB Class 2 as specified in Section 303 of the Standard Specifications, and 1 part (by volume) crushed AC, 100% passing the 1 ½" sieve. The crushed AC shall contain no underlying base or subgrade materials. Prior to crushing, all material passing the ½" sieve shall be removed. The removed material shall not be used for aggregate base. The mixture of AB and crushed AC shall be thoroughly blended to the satisfaction of the Engineer prior to compaction.

(403AHP, 5/07/13)

SECTION 403 ASPHALTIC CONCRETE HOT PLANT REQUIREMENTS:

403-2 Requirements: the third paragraph of the Standard Specifications is revised to read:

The mineral admixture shall be added and thoroughly mixed with the mineral aggregate by means of a mechanical mixing device prior to the mineral aggregate and mineral admixture entering the dryer. For all asphaltic concrete mixes except ACFC (Specification Sections 407 and 411) and AR-ACFC (Specification Section 414), the moisture content of the

combined mineral aggregate shall be a minimum of three percent by weight of the aggregate during the mixing process. For ACFC and AR-ACFC mixes, the mineral aggregate shall be wet with free moisture on the surface of the aggregate just prior to the mixing process. To ensure that adequate mixing water is available on the surface of the aggregate, the Engineer may require that the mineral aggregate for ACFC and AR-ACFC mixes have a moisture content of up to 1-1/2 percent above the combined water absorption.

403-2 Requirements: the twelfth paragraph of the Standard Specifications is revised to read:

The contractor shall provide daily documentation of the weight and proportion of each individual component (mineral aggregate, mineral admixture, and bituminous material) incorporated into the mix. In addition, when reclaimed asphaltic pavement (RAP) is used, the contractor shall provide daily documentation of the weight, determined by a belt scale, and proportion of material from each individual RAP stockpile incorporated into the mix. The percent moisture content of the RAP material from each stockpile shall also be determined and provided daily by the contractor.

When Warm Mix Asphalt (WMA) technologies are used, the contractor shall provide the percent of water (for WMA water foaming processes) and/or the percent of WMA additive incorporated in the mix. The percent of each WMA technology shall be reported either by weight of total mix or by weight of total binder.

When incorporating WMA technologies, the hot plant shall be modified as required by the WMA technology manufacturer to introduce the WMA technology. Plant modifications may include additional plant instrumentation, the installation of asphalt binder foaming systems and/or WMA additive delivery systems, adjusting the plant burner and/or the mixing drum flights in order to operate at lower production temperatures, and/or reducing the production rate of WMA.

(404BITUM, 01/26/16)

SECTION 404 BITUMINOUS TREATMENTS:

404-1 Description: the first paragraph of the Standard Specifications is revised to read:

The work under this section shall consist of furnishing all materials and constructing or applying a single or multiple course bituminous treatment in accordance with the requirements of the specifications and in reasonably close conformity to the lines shown on the project plans or established by the Engineer.

404-2.02(A) General: the first paragraph of the Standard Specifications is revised to read:

The contractor shall provide a source of aggregate material in accordance with the requirements of Section 1001.

404-3.02(A) Distributor Truck: the second paragraph of the Standard Specifications is revised to read:

Prior to the spreading of bituminous material, all distributor trucks proposed for use shall have been tested for rate of transverse spread, in accordance with the requirements of Arizona Test Method 411, and certified within 12 months prior to the date of spreading in accordance with ADOT Materials Policy and Procedure Directive No. 14, "Testing and Certification of Bituminous Distributor Trucks". However, the Engineer may at any time require that each distributor truck be tested to determine the rate of the transverse spread.

404-3.12 Tack Coat: of the Standard Specifications is revised to read:

Tack coat shall be applied prior to placing a bituminous mixture on a primed surface, an existing bituminous surface, or an existing Portland cement concrete pavement surface. Tack coat shall also be applied between layers of bituminous mixtures. A light coat of bituminous material shall also be applied to edges or vertical surfaces against which a bituminous mixture is to be placed.

The contractor shall choose the bituminous material to be used for tack coat. The Engineer must approve the contractor's choice of bituminous material prior to its use.

The bituminous material used for tack coat shall conform to the requirements of Section 1005.

The rate of application for the specific usage will be specified by the Engineer. The following table shows approximate tack coat application rates:

Type of Bituminous Material	Approximate Tack Coat Application Rates: Gallons / Square Yard		Payment Factor
	Prior to Placing ACFC or AR-ACFC	All Other Tack Coats	
Emulsified Asphalt (Special Type) – See Note Below.	Not Allowed	0.12	0.7
Emulsified Asphalt (Other than Special Type)	0.08	0.08	1.0
Asphalt Cement	0.06 to 0.08	0.06 to 0.08	1.0
Note: Emulsified Asphalt (Special Type) shall consist of Type SS-1 or CSS-1 emulsified asphalt diluted with water to provide an asphalt content of not less than 26 percent.			

If emulsified asphalt of any type is used, it shall have broken before the bituminous mixture is placed.

If emulsified asphalt of any type is held overnight, it shall be reheated and agitated prior to further application.

The Engineer may either adjust the application rate or, except as specified below, eliminate the use of tack coat in any part of the work if, in the Engineer's judgment, the bituminous mixture to be placed will be effectively bonded to the underlying surface. For asphaltic concrete friction course, asphaltic concrete friction course (asphalt-rubber), or asphaltic concrete (asphalt-rubber), application of the tack coat immediately prior to placing such pavements shall not be eliminated, although the Engineer may adjust the application rate.

Tack coat shall be applied only as far in advance of the placement of the bituminous mixture as is necessary to obtain the proper condition of tackiness. In no event shall more tack coat be applied in one day than will be covered by the bituminous mixture during that same day.

404-4 Method of Measurement: the third paragraph of the Standard Specifications is revised to read:

Cover material, when specified, will be measured by the cubic yard. Cover material will be weighed, and the amount in tons of dry material will be converted to cubic yards. The weight of all moisture contained in the cover material will be deducted prior to the conversion of the weight in tons to the volume in cubic yards. The dry weight per cubic yard will be determined in accordance with the requirements of AASHTO T 19 (Shoveling Procedure).

404-5 Basis of Payment: the last sentence of the first paragraph of the Standard Specifications is revised to read:

Adjustments will be made in accordance with Section 1005.

(404BIMAT, 01/26/16)

SECTION 404 BITUMINOUS TREATMENTS:

404-5 Basis of Payment: of the Standard Specifications is modified to add:

The term "bituminous material" as used herein shall include asphalt cement, liquid asphalt, and emulsified asphalt.

The contract unit price for each item of bituminous material will be considered to include all costs for furnishing, hauling, handling, spreading, and mixing of the material as required, including the "initial cost" of bituminous material, but excluding any difference in the cost of bituminous material that occurs between the date of bid opening and the date that the material is used on the project.

A cost for bituminous material will be determined monthly by the Department based on the selling prices of asphalt cement published by the Asphalt Weekly Monitor, a publication of Poten & Partners, Inc. The cost will be the arithmetic average of the high and low selling prices for asphalt cement shown in the previous four reports for the Arizona/Utah and Southern California regions.

This cost will be deemed the "initial cost" (IC) for bituminous material for projects on which bids are opened during the following month. This cost will also be deemed the "current price" (CP) for bituminous material for the following month for projects in construction.

This value will be effective as of the last Wednesday of each month, and will be posted on the ADOT Contracts and Specifications Section website, on or shortly after the last Wednesday of month.

For each item of bituminous material for which there is a specific pay item, and for the bituminous material used in Asphaltic Concrete (Miscellaneous Structural), an adjustment will be made as follows for each month that a quantity of bituminous material was used on the project.

The "initial cost" (IC) for the month in which the project was bid will be compared with the "current price" (CP) as specified above for the appropriate current month. The "current price" (CP) will be as posted on the Department's website on the last Wednesday of each month, and will be used to adjust costs for bituminous material incorporated into the job during the following month (for example; bituminous material used in May will be adjusted, as specified herein, based on the "current price" (CP) for May as posted on the last Wednesday of April). Any difference in price between these two values will be applied to the quantity of eligible bituminous material incorporated into the work.

Determination of the eligible quantities of bituminous material will be based on contractor-furnished invoices, except as modified below.

The tons of emulsified products to which the adjustment will be applicable will be the tons of the emulsified asphalt prior to dilution.

Adjustments in compensation for emulsified asphalts will be made at 60 percent of either the increase or decrease.

The tons of Bituminous Material (Asphalt-Rubber) to which the adjustment will be applicable will be 0.80 multiplied times the total quantity of the item used. The adjustment will not apply to the 20 percent of the material which constitutes the crumb rubber additive.

The tons of bituminous material incorporated in Asphaltic Concrete (Miscellaneous Structural) or Asphaltic Concrete (Miscellaneous Structural-Special Mix) to which an adjustment will be applicable shall be as follows:

- (1) For mixes without reclaimed asphalt pavement (RAP), the adjustment will be equal to five percent of the quantity, measured in tons, of asphaltic concrete placed, regardless of the actual percentage of bituminous material incorporated into the mix.
- (2) For mixes with reclaimed asphalt pavement (RAP), the adjustment will be equal to four percent of the quantity, measured in tons, of asphaltic concrete placed, regardless of the actual percentage of bituminous material incorporated into the mix.

- (3) If the quantity of asphaltic concrete is measured by volume, the supplemental agreement establishing the method of measurement will specify the manner in which the tons of bituminous material eligible for the adjustment is determined.

The tons of bituminous materials which are paid for on the basis of testing by nuclear asphalt content gauge, ignition furnace, or other approved methods to which the adjustment will be applicable, are the tons which have been incorporated into the mixture.

When reclaimed asphalt pavement (RAP) is used in asphaltic concrete, only the virgin asphalt cement will be subject to a bituminous material price adjustment. RAP binder is not subject to a price adjustment.

No additional compensation will be made for any additional or increased charges, costs, expenses, taxes, etc., which the contractor may have incurred since the time of bidding and which may be the result of any increase in the "initial cost" of bituminous material.

Adjustment in unit prices of items governed by this provision will be made in the next regular monthly progress payment following actual use or application of the bituminous material.

Any adjustment in compensation made for bituminous material incorporated into the work after the expiration of the specified completion time set forth in the contract, or as may be extended in accordance with the provisions of Subsection 108.08, will be on the basis of the price of bituminous material shown on the Department's website and applicable for the date of the expiration of the specified completion time as hereinbefore specified.

(409ACMS, 01/26/16)

SECTION 409 ASPHALTIC CONCRETE (MISCELLANEOUS STRUCTURAL):

409-1 Description: of the Standard Specifications is revised to read:

The work under this section shall consist of constructing Asphaltic Concrete (Miscellaneous Structural), hereinafter asphaltic concrete, by furnishing all materials, mixing at a plant, hauling and placing a mixture of aggregate materials, reclaimed asphalt pavement (RAP) if used, mineral admixture, and bituminous material (asphalt cement) to form a pavement course or to be used for other specified purposes, in accordance with the details shown on the project plans and the requirements of the specifications, and as directed by the Engineer.

The contractor shall acquire and make all arrangements for a source or sources of material, furnish a mix design which will meet the design criteria specified hereinafter, and provide all the equipment, materials, and labor necessary to complete the work.

409-2 Materials: of the Standard Specifications is modified to add:

The bidding schedule quantity of asphaltic concrete is based on an estimated unit weight of **155** pounds per cubic foot.

409-2.01 Mineral Aggregate: “Carbonates” and “Note (1)” are added to the table following the first paragraph of the Standard Specifications:

Mineral Aggregate Characteristics	Test Method	Requirement
Carbonates (1)	Arizona Test Method 238	Maximum 20%
<p>(1): Testing for carbonates only applies if either of the following conditions exist:</p> <ul style="list-style-type: none"> (a) The asphaltic concrete is the designed final pavement surface normally used by traffic. (b) The asphaltic concrete, temporary or otherwise, will be subject to traffic for more than 60 days. 		

409-2.01 Mineral Aggregate: the table following the second paragraph of the Standard Specifications is revised to read:

Mix Design Grading Limits						
Sieve Size	Percent Passing					
	Lift Thickness Less Than 1½ Inches		Lift Thickness 1½ to 2 Inches		Lift Thickness Greater Than 2 Inches	
	Without Admixture	With Admixture	Without Admixture	With Admixture	Without Admixture	With Admixture
1 Inch					100	100
¾ Inch			100	100	90 – 100	90 – 100
½ Inch	100	100	90 – 100	90 – 100	---	---
⅜ Inch	90 – 100	90 – 100	70 – 85	70 – 85	70 – 85	70 – 85
No. 8	41 – 55	42 – 56	41 – 51	42 – 52	41 – 51	42 – 52
<u>No. 40</u>	9 – 19	10 – 20	---	---	---	---
No. 200	2.0 – 5.0	3.0 – 6.5	2.0 – 5.0	3.0 – 6.5	2.0 – 5.0	3.0 – 6.5

409-2.02 Bituminous Material: the first paragraph of the Standard Specifications is revised to read:

Asphalt cement shall be a performance grade (PG) asphalt binder, conforming to the requirements of Section 1005. The type of asphalt binder shall be PG **70-10**.

409-2.03 Mineral Admixture: the last paragraph of the Standard Specifications is revised to read:

The certification and acceptance of Portland cement, blended hydraulic cement, and hydrated lime shall be in accordance with ADOT Materials Policy and Procedure Directive

No. 13, "Certification and Acceptance of Hydraulic Cement, Fly Ash, Natural Pozzolan, Silica Fume, and Lime".

409-2.04 Mix Design: the third and fourth paragraphs of the Standard Specifications are revised to read:

The mix design shall be prepared by or under the direct supervision of a professional engineer experienced in the development of mix designs and mix design testing. Reclaimed asphalt pavement (RAP) may be used in the mixture if properly designed per Arizona Test Method 833; however, RAP will not be allowed in the mixture when asphalt cement type PG 76-22 TR+ or PG 70-22 TR+ is specified in Subsection 409-2.02. Limits for the usage of RAP shall be per ADOT Materials Policy and Procedure Directive No. 20, "Guidance on the Use of Reclaimed Asphalt Pavement (RAP) in Asphaltic Concrete". The mix design engineer shall meet the requirements given in ADOT Materials Policy and Procedure Directive No. 4, "Asphaltic Concrete Mix Design Proposals and Submittals". The mix design shall be provided in a format that clearly indicates all the mix design requirements and shall be sealed, signed, and dated by the mix design engineer.

The mix design shall be prepared by a mix design laboratory that has met the requirements of ADOT Materials Policy and Procedure Directive No. 19, "ADOT System for the Evaluation of Testing Laboratories".

If approved by the Engineer, as an alternative to meeting the mix design requirements specified herein, a 1/2 inch or 3/4 inch mix design meeting the requirements of either Section 416 or Section 417 of the specifications may be substituted for use. The type of asphalt binder used in the alternative mix design must be the same as that specified in Subsection 409-2.02. The alternative mix design may include reclaimed asphalt pavement (RAP) if properly designed per Arizona Test Method 833. The lift thickness for the alternative mix design shall conform to the following table.

Alternative Mix Design	Minimum Lift Thickness
Section 416 (1/2 inch mix)	1-1/2 inches
Section 416 (3/4 inch mix)	2 inches
Section 417 (1/2 inch mix)	2 inches
Section 417 (3/4 inch mix)	2-1/2 inches

The contractor may propose the use of a mix design that has been developed for a previous project. The proposed mix design shall meet the requirements of these specifications. The contractor shall provide evidence that the type and source of bituminous material, the type of mineral admixture, and the source and methods of producing mineral aggregate, and RAP material if applicable, have not changed since the formulation of the previous mix design. The contractor shall also provide current test results for all specified characteristics of the mineral aggregate, and RAP material if applicable, proposed for use. The Engineer will determine if the previously used mix design is suitable for the intended use and if the previous use of the mix design was satisfactory to the Department. The Engineer will either approve or disapprove the proposed mix design. Should the Engineer disapprove the use

of the previously used mix design, the contractor shall prepare and submit a new mix design proposal in accordance with the requirements of these specifications.

A previously used mix design older than two years from the date it was formulated, sealed, signed, and dated shall not be allowed for use. Once approved for use on a project, a previously used mix design may be used for the duration of that project.

409-2.04 Mix Design: the last two paragraphs of the Standard Specifications are revised to read:

The mix design shall meet the following criteria when tested in accordance with the requirements of the following test methods:

Criteria	Requirement	Arizona Test Method
1. Voids in Mineral Aggregate: %, Range	14.5 – 18.5	(See Note)
2. Effective Voids: %, Range	5.3 – 5.7	(See Note)
3. Absorbed Asphalt: %, Range	0 – 1.0	(See Note)
Note: For mixes without RAP, Arizona Test Method 815. For mixes with RAP, Arizona Test Method 833.		

The Engineer reserves the right to adjust the asphalt content during production from the mix design value without additional compensation to the contractor in order to obtain desirable effective voids.

409-2.05 Sampling and Testing: of the Standard Specifications is revised to read:

Sampling and testing the materials and mixture for quality control purposes shall be the contractor's responsibility. The contractor shall perform sufficient testing to assure that mineral aggregate and asphaltic concrete are produced which meet all specified requirements. The Engineer reserves the right to sample and test the materials and mixture when necessary to determine that they reasonably conform to the requirements specified herein.

409-3.01 General: the ninth, tenth, eleventh, and twelfth paragraphs of the Standard Specifications are revised to read:

All wheels and tires of compactors and other equipment surfaces shall be treated when necessary with a release agent approved by the Engineer in order to prevent the sticking of asphaltic concrete. Release agents which degrade, dissolve, or in any way damage the bituminous material shall not be used. Diesel fuel shall not be used as a release agent.

Asphaltic concrete immediately behind the laydown machine shall be in a thoroughly mixed, free-flowing, and workable condition, be free of lumps and crusts, and have a minimum temperature of 275 degrees F.

All courses of asphaltic concrete shall be placed and finished by means of self-propelled paving machines except under certain conditions or at certain locations where the Engineer deems the use of self-propelled paving machines impractical.

The speed of the paving machine shall be coordinated with the production of the plant and an adequate number of trucks for hauling asphaltic concrete shall be available in order to achieve, as far as practical, a continuous operation.

Self-propelled paving machines shall spread the mixture within the specified tolerances, without segregation or tearing, true to the line, grade, and crown indicated on the project plans. Pavers shall be equipped with hoppers and augers which will distribute the mixture uniformly in front of adjustable screeds.

409-3.01 General: the seventeenth paragraph of the Standard Specifications is revised to read:

Before asphaltic concrete is placed, the surface to be paved shall be cleaned of all objectionable material and tacked with bituminous material in accordance with the requirements of Section 404.

409-5.02 Reduction for Noncompliance: of the Standard Specifications is revised to read:

A reduction in payment to the contractor for asphaltic concrete will be made for quantities of asphalt cement (bituminous material) that do not meet the requirements of Section 1005 as determined by corresponding test results. Adjustments in payment will be made in accordance with the requirements of Table 1005-1 and the following formula:

$$R = (100 - P) \times \left[\frac{(CP) \times T}{100} \right]$$

Where:

- R = Amount of Reduction in Payment (dollars)
- T = Quantity of asphalt cement in failure (tons, rounded to nearest tenth)
- P = Percent of Contract Unit Price allowed (Table 1005-1)
- CP = Current Price for asphalt cement (bituminous material), as determined by the Department, for the month in which a deficiency was noted. This value will be posted on the ADOT Contracts and Specifications Section website, on or shortly after the last Wednesday of each month.

(501PIPE, 05/03/16)

SECTION 501 PIPE CULVERT AND STORM DRAINS:

501-1 Description: the first paragraph of the Standard Specifications is revised to read:

The work under this section shall consist of furnishing pipe and all other materials required and the installing of pipe, including excavating, and furnishing, placing and compacting backfill material, all in accordance with the details shown on the plans and the requirements of the specifications.

501-1 Description: the last sentence of the third paragraph of the Standard Specifications is revised to read:

Special sections, fittings, elbows, branch connections, tapered inlets, end sections, connectors, coupling, and other such items shall be of the same material and coating as the pipe to which they are attached unless otherwise stated in the specifications.

501-3.03(A) General: the second paragraph of the Standard Specifications is revised to read:

If the Engineer determines that the end of an existing pipe is damaged to the extent that it cannot be repaired sufficiently to be joined properly to the new pipe, the damaged portion shall be removed.

Pipe shall be installed in reasonably close conformity with the lines, grades and dimensions shown on the project plans or specified by the Engineer.

501-3.03(B)(1) General: the seventh paragraph of the Standard Specifications is hereby deleted:

501-3.03(C) Slotted Pipe: the third paragraph of the Standard Specifications is revised to read:

Slotted pipe shall be backfilled with grout in accordance with the details shown on the project plans. The grout shall conform to the requirements of Subsection 1010-3. Grout shall not be placed when a descending air temperature falls below 40 degrees F or until an ascending air temperature exceeds 35 degrees F. Temperatures shall be taken in the shade and away from artificial heat. The grout shall be cured in accordance with the requirements of Subsection 912-3.09.

501-3.03(G) Corrugated High Density Polyethylene Plastic Pipe: the title and text of the Standard Specifications are revised to read:

501-3.03(G) Corrugated High Density Polyethylene Plastic Pipe, Steel Reinforced High Density Thermoplastic Ribbed Pipe, and Corrugated Polypropylene Plastic Pipe:

Corrugated high density polyethylene plastic pipe, steel reinforced high density thermoplastic ribbed pipe, and corrugated polypropylene plastic pipe shall be assembled and installed in accordance with the manufacturer's instructions.

Watertight joints, unless otherwise specified, will not be required for storm drains, culverts, or other drainage pipes. However, joints for these pipes shall be water resistant. Watertight joints shall be provided for siphon and irrigation pipe installations.

Watertight and water resistant joints shall conform to the requirements of Subsection 1010-8.

Tracer wire for magnetic detection shall be placed in accordance with the requirements of Subsection 104.15.

To prevent damage and to assure that proper line and pipe grade are maintained throughout the backfilling operation, special care shall be taken in the handling and installation of corrugated high density polyethylene plastic pipe and fittings, steel reinforced high density thermoplastic ribbed pipe and fittings, and corrugated polypropylene plastic pipe and fittings.

When end sections for the above listed pipes are called for on the plans, the contractor shall use metal safety end sections unless otherwise specified.

(607POST, 9/08/11)

SECTION 607 ROADSIDE SIGN SUPPORTS:

607-1 **Description:** the first paragraph of the Standard Specifications is revised to read:

The work under this section shall consist of furnishing and installing roadside sign supports in accordance with the details shown on the plans and the requirements of the specifications.

607-2.05 **Concrete:** the last paragraph of the Standard Specifications is revised to read:

Reinforcing steel bars for breakaway sign post foundations shall conform to the requirements of ASTM A 615. Unless otherwise specified, steel bars meeting the requirements of ASTM A 706 may be substituted for ASTM A 615 steel bars. When ASTM A 706 bars are used, tack welding of the reinforcement will not be permitted unless approved in writing by the Engineer. Reinforcing steel wire shall conform to the requirements of ASTM A 82.

ITEM 6080109 – REMOVE AND REINSTALL SIGN:

Description:

The work under this item consists of furnishing all labor, equipment and material necessary to remove, transport, store and reinstall existing sign panels and embedded (direct buried) sign posts as shown in the project plans and specified herein. The work shall include any necessary excavation, backfilling and compaction to restore the excavated or disturbed areas to finished grade. Sign panels and posts damaged during this operation shall be replaced at the contractor's expense at no cost to the Department.

Materials:

The existing sign panels and sign posts shall be used for this item of work.

Construction Requirements:

The removal of the sign panels, sign post shall be in accordance with the requirements of Subsection 202-3.06 of the Standard Specifications.

The contractor shall reinstall all removed signs and posts with new hardware. The sign shall be reinstalled per Section 608 of the ADOT Standard Specifications. The original sign post shall be reinstalled, however, if the post is not able to be reused, it shall be replaced with in kind post.

Reinstalling the signs shall be in consultation with the Salt River Pima-Maricopa Indian Community project representative, Manual on Uniform Traffic Control Devices, ADOT Standard Specifications, plans and these Special Provisions.

Backfill and compaction shall be in accordance with Subsection 202-3.01 of the Standard Specifications.

Method of Measurement:

Remove and Reinstall Sign will be measured per Lump Sum, for all signs removed and reinstalled as specified herein and shown on plans.

Basis of Payment:

Remove and Reinstall Sign, measured as provided above, will be paid for at the contract lump sum price, which price shall be full compensation for the work, complete in place, including removal of existing embedded post and signs, reinstallation of existing post and sign panels, new hardware, new connections, new fixtures, and if required new posts, and as specified herein and shown on the project plans.

(610PNT, 08/29/12)

SECTION 610 PAINTING:

610-1 Description: of the Standard Specifications is revised to read:

The work under this section shall consist of furnishing paint and other materials and painting concrete, structural steel, or other surfaces where shown on the plans in accordance with the requirements of the specifications. The work shall include preparation of the surfaces to be painted, the protection and drying of the paint coatings and the protection of pedestrian, vehicular or other traffic near or under the work from paint spatter and disfigurement.

610-3.02(A)(1) Blast Cleaning: the last sentence of the first paragraph of the Standard Specifications is revised to read:

Blast cleaning shall leave all surfaces with a dense, uniform anchor pattern or profile of 1.0 to 3.0 mils, as measured with an approved surface profile comparator or pressed film replica tape.

610-3.02(A)(4) Water Blast Cleaning: the next to last sentence of the first paragraph of the Standard Specifications is revised to read:

All the surfaces to be coated shall be power washed with a water pressure of not less than 2000 psi and not greater than 5000 psi.

610-3.03 Application: the first two paragraphs of the Standard Specifications are revised to read:

Painting shall be accomplished in a neat and professional manner.

For painting metal surfaces, paint shall normally be applied by spraying with limited use of hand brushes or rollers.

610-3.03 Application: the last paragraph of the Standard Specifications is revised to read:

For painting concrete surfaces, the contractor shall apply all paint applications to a test specimen or to the concrete surface, according to Application Plan, for the subsequent approval of the Engineer. The contractor shall refinish the test inspection areas to match the paint finish of the surrounding concrete surfaces.

610-3.04 Protection Against Damage: the second paragraph of the Standard Specifications is revised to read:

Paint which results in an unsightly appearance on surfaces not designated to be painted shall be removed or obliterated as approved by the Engineer.

610-3.05(A)(1) General: the first paragraph of the Standard Specifications is revised to read:

All surfaces of new metals shall be painted with one shop coat (primer) and two field coats (the intermediate coat and topcoat), unless otherwise specified.

All paints used shall be appropriately chosen from among the types described in Subsections 1002-2.01 through 1002-2.05 and shall conform to the requirements given therein.

610-3.05(A)(2) Primer: the first paragraph of the Standard Specifications is revised to read:

The dry film thickness of the primer shall not be less than 2.0 mils, and be sufficient to cover the blast profile pattern.

610-3.05(A)(2) Primer: the first sentence of the fifth paragraph of the Standard Specifications is revised to read:

As soon as practicable after being accepted by the Engineer and prior to removal from the shop, machine-finished surfaces shall be coated with a rust inhibitor which can easily be removed.

610-3.05(A)(3) Intermediate Coat: the first sentence of the first paragraph of the Standard Specifications is revised to read:

The intermediate coat shall be appropriately tinted to contrast with the primer.

610-3.05(A)(4) Topcoat: the first paragraph of the Standard Specifications is hereby deleted:

610-3.05(B) Concrete Surfaces: the first paragraph of the Standard Specifications is revised to read:

When painting is specified on the plans or in the special provisions, paint conforming to the requirements of Subsection 1002-2.06, shall be applied to the exposed concrete surfaces tabulated below, except that sidewalks, appurtenant curbs, downdrains, and bridge deck surfaces shall be excluded.

610-3.06 Painting Damaged Galvanized Coating: of the Standard Specifications is revised to read:

Damaged areas of galvanized coating shall be roughened by sanding or acid treatment. The roughened areas shall be painted with two coats of zinc-rich primer, conforming to the requirements of Subsection 1002-2.02.

610-4 Blank: the title and text of the Standard Specifications are revised to read:

610-4 Field Adhesion Testing:

Random adhesion testing of the completed paint finish may be performed by the Department after a minimum of 30 days from the time of application.

If adhesion testing is performed, it will be done according to one or both of the following methods and shall meet the respective requirements. When testing is performed in accordance with ASTM D 4541, Method E, a strength of at least 100 psi is required. When testing is performed in accordance with ASTM D 3359, Method A, a rating of 3A or higher is required.

ITEM 6110202 METAL HANDRAIL (DETAIL DF):

Description:

The work under these items consists of furnishing and installing metal handrails including railing, posts, fittings, concrete and anchorages. The railing shall be installed at the locations and in conformance with the details shown on the Wall Plans, in accordance with these Special Provisions and as directed by the Engineer.

Materials:

Materials shall conform to the requirements specified on the plans, per Section 604 of the Standard Specifications and as specified herein. The concrete shall be Class B concrete per Section 1006 of the Special Provisions.

The contractor shall furnish complete copies, in triplicate, of all mill reports on steel materials furnished.

Construction Requirements:

Prior to beginning any work on the fabrication of the railing, the contractor shall submit shop drawings in accordance with Subsection 105.03 of the Standard Specifications, showing complete details. Details that deviate from the details shown in the project plans shall be approved by the Department Engineer and sealed by a Licensed Professional Engineer registered in the State of Arizona. The use of expansion anchors will not be permitted.

Certificates of Compliance shall be submitted to the Engineer in accordance with the requirements of Subsection 106.05 of these Special Provisions and the Standard Specifications.

The railing shall be carefully erected, true to line and grade. Posts shall be vertical and parallel with the deviation from the vertical for the full height of the panel not exceeding 1/8 inch.

Railing panels shall be straight and true to dimensions. For metal handrail on curves, either horizontal or vertical, the railing shall conform closely to the curvature of the structure.

Welding shall be performed in accordance with the requirements of Subsection 604-3.06 of the Standard Specifications and the current edition of the American Welding Society, Structural Welding Code, D1.1. All butt welds on exposed surfaces shall be ground flush with adjacent surfaces.

After erecting the railing, any damage or abrasion to painted surfaces or exposed steel shall be repaired in accordance with Section 610 of these Special Provisions and the Standard Specifications.

All portions of the handrails and the connections shall be painted in accordance with the requirements of Section 610 of these Special Provisions and the Standard Specifications and to the color indicated on the plans. Paint coverage for items to be embedded in concrete shall be extended a minimum of 2 inches below the finished concrete surface.

Method of Measurement:

Metal Handrail will be measured by the linear foot so constructed, to the nearest foot measured horizontally from end post to end post along the face of the railing.

Basis of Payment:

The accepted quantities of Metal Handrail, measured as provided above, will be paid for at the contract unit price per linear foot, complete in place, including welding, painting, expansion joints, and connections.

(701PDMPT, 05/03/16)

SECTION 701 - MAINTENANCE AND PROTECTION OF TRAFFIC:

701-1 **Description:** the first and third paragraphs of the Standard Specifications are revised to read:

The work under this section shall consist of providing flagging services and pilot trucks, and furnishing, installing, maintaining, moving and removing barricades, warning signs, lights, signals, cones, and other traffic control devices to provide safe and efficient passage through and/or around the work and to protect workers in or adjacent to the work zone. The work shall be done in accordance with the requirements of Part 6 of the Manual on Uniform Traffic Control Devices (MUTCD) and the associated Arizona Department of Transportation supplement. When referred to herein, these documents will be referred to as MUTCD and associated ADOT Supplement.

When a traffic control plan is included in the project plans, this plan shall govern unless an alternate plan, acceptable to the Engineer, is submitted by the contractor. If no traffic control plan is provided or if the contractor desires to deviate from the provisions for maintaining traffic as described in this section, it shall submit to the Engineer for approval a proposed sequence of operations and a compatible method of maintaining traffic.

The contractor's submittal shall be prepared by an individual meeting one of the following criteria:

- (a) Has successfully completed a recognized traffic control supervisor training and certification program. The traffic control supervisor training and certification provided by the American Traffic Safety Services Association (A.T.S.S.A.) or the International Municipal Signal Association (IMSA) shall be acceptable. Training and certification through other programs must be approved in advance by the Engineer. The individual's training and certification shall be current and must be valid throughout the duration of the project. In order to remain current with the Department, training and certification shall be completed or renewed at least once every four years.
- (b) Be a licensed professional engineer registered in the State of Arizona and have completed an approved traffic control supervisor training program, as specified in Subsection 108.03. The training shall be current and must be valid throughout the duration of the project. In order for the training to remain current with the Department, it shall be completed or renewed every four years.

The contractor shall submit proof of the proposed individual's credentials at the preconstruction conference. The contractor bears all responsibility for any such contractor-submitted traffic control plan, whether prepared by its direct employee or other individual.

The contractor's proposal shall be submitted early enough to allow at least two weeks for review and approval before use of the proposed traffic control plan.

701-2.01(B)(1) General Requirements: item (d) of the second paragraph of the Standard Specifications is revised to read:

- (d) The name, title and signature of a person having legal authority to bind the manufacturer or supplier of the Category I and II devices. The binding authority shall be in accordance with the applicable requirements of Subsection 106.05(B).

701-2.03 Temporary Concrete Barrier: the second paragraph of the Standard Specifications is revised to read:

The contractor shall provide, at the preconstruction conference, a certificate of compliance, conforming to the requirements of Subsection 106.05, stating that any temporary concrete barrier to be used on the project conforms to Signing and Marking Standard Drawing C-3. The contractor shall include the project number on the submittal.

701-2.04 Temporary Impact Attenuation Devices: the second paragraph of the Standard Specifications is revised to read:

Temporary impact attenuation devices shall also meet evaluation criteria for Test Level 3 per NCHRP (National Cooperative Highway Research Program) Report 350, or for Test

Level 3 per MASH (AASHTO Manual for Assessing Safety Hardware). The contractor shall provide, at the preconstruction conference, a certificate of compliance, conforming to the requirements of Subsection 106.05, certifying that any temporary impact attenuation devices to be used on the project will meet the above requirement. The contractor shall include the project number on the submittal.

701-2.08 Barricades: the title and second paragraph of the Standard Specifications are revised to read:

701-2.08 Barricades and Other Channelizing Devices:

All sheeting for barricades and other channelizing devices shall conform to the requirements of Section 1007.

701-3.05 Temporary Pavement Markings (Application and Removal):

(C) Preformed Pavement Markings: the first paragraph of the Standard Specifications is revised to read:

Preformed pavement markings for temporary applications shall be Type II (Temporary-Removable) and III (Temporary-Nonremovable) and shall conform to the requirements of Section 705 of the specifications.

701-3.07 Truck-Mounted Attenuator: the title and text of the Standard Specifications are revised to read:

701-3.07 Truck-Mounted and Trailer-Mounted Attenuators:

The contractor shall provide trucks and truck-mounted attenuators, or trailer-mounted attenuators and host vehicles, at the locations shown on the project plans and/or as directed by the Engineer.

Attenuators shall meet either NCHRP Report 350, Test Level 3 criteria, or MASH (Manual for Assessing Safety Hardware), Test Level 3 criteria, passing both mandatory and optional tests. The truck and attenuator combination shall only be used in the configuration tested. Either the truck or attenuator shall have a sequential arrow display panel or changeable message board.

Attenuators that require chocking or blocking of the vehicle to meet NCHRP Report 350 or MASH certification shall not be used.

Attenuators shall have rear-mounted, retroreflective chevron stripes and a standard trailer lighting system, including brake lights, turn signals, ICC-bar lights, and two yellow rotating beacons, or strobe lights, or LED lights mounted on opposite rear corners of the truck or attenuator approximately 4-1/2 feet above the bottom of the tires. A Type C arrow panel or changeable message board shall be provided and shall be installed in accordance with the NCHRP 350/ MASH Crashworthiness Certification or FHWA Letter of Acceptance. There shall be a minimum of seven feet from the roadway to the bottom of the panel or board.

Frame work shall be an integral part of the truck and be permanently mounted in such a way as to prevent the unit from separating from the truck in the case of a collision.

For each proposed truck-mounted or trailer-mounted attenuator, the contractor shall provide a Certificate of Compliance, in accordance with Subsection 106.05, to the Engineer for approval prior to use. For truck-mounted attenuators, the certificate shall also include the certified weigh bill for the truck, and for trailer-mounted attenuators the certificate shall state the minimum weight for the host vehicle. The certificate shall state that the attenuator meets the specified criteria, and shall clearly state the roll-ahead distance. A copy of this documentation shall be kept in the truck cab or host vehicle, available for immediate inspection when requested by the Engineer.

When in use for attenuation, trucks shall be used exclusively for attenuators. When in use for attenuation, such trucks shall not be used to carry or store equipment or devices, secured or unsecured. No modification in configuration or use shall be allowed without a resubmitted certified weigh bill for the Engineer's approval.

Truck-mounted or trailer-mounted attenuators used as shadow vehicles per the MUTCD shall be positioned at a distance greater than the roll-ahead distance in advance of the workers or equipment being protected so that there will be sufficient distance, but not so much that errant vehicles will travel around the shadow vehicle and strike the protected workers and/or equipment.

The contractor shall cease operations when a truck-mounted or trailer-mounted attenuator is damaged. The contractor shall not resume operations until the attenuator has been repaired or replaced, unless authorized by the Engineer.

701-3.08 Changeable Message Board: of the Standard Specifications is revised to read:

Changeable message boards shall be furnished and maintained by the contractor at the locations shown on the plans and as specified by the Engineer. The operations and messages programmed into the board controller shall be as directed by the Engineer. The changeable message board shall be a complete and operational portable unit which shall consist of a wheeled trailer with an adjustable, changeable message board, board message controller and self-contained power supply.

The power supply for the changeable message board shall be a fully independent self-contained trailer-mounted system. The changeable message board power supply shall be battery operated and rechargeable from a solar panel mounted above the changeable message board.

The message characters shall be delineated by either electromagnetically actuated reflective dots or optically enhanced light emitting diode pixels (LED) operating under the control of a digital computer.

The contractor shall submit, at the pre-construction conference, a Certificate of Compliance that the changeable message board to be used on this project shall be as described herein.

The character formation system and components shall conform to the following requirements:

- (1) The changeable message board shall be programmable, and shall be capable of displaying a minimum of three lines of message copy, with a minimum of eight characters per line, in various alphanumeric combinations.
- (2) The changeable message board matrix configuration shall be 35 dots or pixels per character in a five horizontal by seven vertical arrangement of the dots or pixels.
- (3) The dot or pixel size shall be a 2.5-inch high by 1.625-inch wide rectangle (minimum), or equivalent area.
- (4) Each character shall be 18 inches in height and 12 inches in width (minimum).
- (5) The horizontal character separation shall be three inches or more.
- (6) Dot color shall be fluorescent yellow upon activation and flat black when not activated. The LED pixels shall emit amber light upon activation and be dark when not activated.
- (7) The line separation shall be five to 12 inches.
- (8) Changeable message boards shall be protected with a clear lexan-type or equivalent shield that shall not interfere with or diminish the visibility of the sign message.
- (9) The programmable message board shall be capable of displaying moving arrow patterns as one of the operator-selected programs.
- (10) The message board shall also be capable of displaying up to two messages in sequence, with variable timing in a minimum of quarter-second increments.
- (11) The message board shall be clearly visible and legible from a distance of 800 feet under both day and night conditions. The dot-matrix board shall have an internal illumination system that shall automatically activate under low light conditions to achieve the visibility requirements. The LED-pixel matrix board shall adjust light output (pulse width modulation) to achieve the visibility requirements.
- (12) The power supply achieved from the battery and solar panel recharging system shall have sufficient capacity to operate the changeable message board for a minimum of 20 days without direct sunshine. The solar panel array shall be capable of recharging the batteries such that 2.5 to 3.5 hours of direct sunshine shall provide for a minimum of one 24-hour period of usage. Additionally, the battery recharging controller shall have an ambient temperature sensing device which will automatically adjust the voltage supplied from the solar panels to the

batteries. The sensing device shall ensure that the batteries are properly charged in hot or cold weather and shall provide the sign with sufficient power to operate the sign as specified.

When in operation, the changeable message board trailer shall be offset a minimum of eight feet from the nearest edge of pavement. If the trailer is located behind temporary concrete barrier, a minimum offset of six feet will be required. Should the specified shoulder width not be available, a minimum two-foot offset from the nearest edge of pavement or temporary concrete barrier shall be required. When positioned on the highway, the changeable message board trailer shall be delineated with a minimum of 10 Type II barricades or vertical panels with Type C steady burn lights at a spacing of 10 to 20 feet, or as shown on the approved traffic control plan.

When not in operation, the changeable message board shall be moved a minimum of 30 feet from the edge of pavement.

The changeable message board trailer shall be placed on a level surface and be secured as recommended by the manufacturer and as directed by the Engineer. The contractor shall provide any necessary incidental grading and clearing work required to provide a level surface and clear area for the sign.

701-3.10 Sign Sheetings: of the Standard Specifications is revised to read:

Sign sheeting for all temporary work zone signs shall conform to the requirements of Section 1007.

701-3.13 Flagging Services: of the Standard Specifications is revised to read:

Flagging services shall consist of either civilian, local enforcement officers and their vehicles, or DPS (Department of Public Safety) officers and their vehicles. The Engineer will determine the type of flagger needed, and may adjust the relative number of hours of each type of flagger specified in the traffic control plan.

If available, only DPS officers shall be used on Interstate Highways and Urban Freeways. DPS officers shall also be used on other construction projects except when a local law enforcement agency has jurisdiction, in which case a local law enforcement officer and vehicle shall be used.

The contractor shall be responsible to procure civilian flaggers, DPS officers, and local enforcement officers. When procuring DPS officers, the contractor shall contact DPS at least two business days before flagging services will be required. Such contact must be made between the hours of 7:00 A.M. and 5:00 P.M. (M.S.T.).

In the event that local enforcement officers or DPS officers are temporarily unable to provide flagging services, the contractor shall ensure that traffic control is maintained and all personnel are protected, either by providing civilian flaggers or through other means as approved by the Engineer. No adjustments to the contract will be allowed for any delays resulting from the unavailability of local enforcement officers or DPS officers.

A DPS or local enforcement officer shall not work more than 12 consecutive hours unless an emergency situation exists which, in the opinion of the Engineer, requires that the officer remain in the capacity of a flagger.

The contractor shall furnish verification to the Engineer that all civilian flaggers have completed a recognized training and certification program. Flaggers certified by the American Traffic Safety Services Association (A.T.S.S.A.) or by the National Safety Council shall be acceptable. Certification through other programs offering flagger training must be approved by the Engineer. Flagger certification must be current. Training and certification shall be required at least once every four years.

701-4.03(E) Limitation of Measurement: the second paragraph of the Standard Specifications is revised to read:

Measurement will be made after the initial installation and once weekly thereafter for items in continuous use and at any other times changes are made in the use of traffic control elements listed under Subsection 701-4.01(B). The contractor shall notify the Engineer when any changes are made in the use or location of traffic control elements.

701-4.04 Measurement of Work Elements: Sub-paragraph (A) of the Standard Specifications is revised to read:

- (A) Temporary concrete barrier will be measured by the linear foot along the center line of the uppermost surface upon its initial installation (Complete-in-Place), and upon any subsequent relocations, as defined in Subsection 701-5.01. Barrier will be measured by linear foot for each 24-hour day for the "In-Use" condition.

701-4.04 Measurement of Work Elements: Sub-paragraph (C) of the Standard Specifications is revised to read:

- (C) Truck-Mounted Attenuators, including driver, and Trailer-Mounted Attenuators, including host vehicle and driver, will be measured by the day for each 24-hour day that a truck-mounted or trailer-mounted attenuator and operator are used to protect the work site.

701-4.04 Measurement of Work Elements: Sub-paragraph (F) of the Standard Specifications is revised to read:

- (F) Civilian flagging services will be measured by the hour for each hour that a civilian flagger is provided. Flagging services by DPS officers and local enforcement officers will be measured for each hour that a uniformed, off-duty DPS officer or law enforcement officer with vehicle is employed directly by the contractor as a flagger within the project limits, when authorized in advance by the Engineer. Quantities will be rounded to the nearest 0.5 hour.

Civilian, DPS, or local enforcement flagging services and traffic control devices required to permit contractors' traffic to enter safely into normal traffic within the project limits will be paid under their respective items. Flaggers required by a

written local permit agreement will be measured for payment under this item. Additional civilian, DPS, or local enforcement flagging services used within the project limits shall be measured for payment under this item, subject to the approval of the Engineer.

Civilian, DPS, or local enforcement flagging services and traffic control devices used outside the project limits will be measured under their respective items. The Department will pay 50 percent of the unit bid price for such flaggers and traffic control devices used as described in this paragraph, subject to the approval of the Engineer. The project limits are defined as the construction work zone as shown on the approved traffic control plan for the specific section of highway under construction.

701-5.01 Temporary Concrete Barrier (Installation and Removal): of the Standard Specifications is revised to read:

Temporary concrete barrier, measured as provided above, will be paid for at the contract unit price, which price shall be full compensation for the work, complete in place, as specified herein and as shown on the plans, including furnishing, placing, dismantling, and removal. The price bid shall also include any required connection devices, barrier markers, and glare screen.

Fifty percent of the contract unit price for temporary concrete barrier will be paid upon satisfactory installation.

Should it be necessary to dismantle, pick up and relocate a portion of the barrier installation during construction, whether laterally or vertically, that portion of the removed and relocated barrier will be considered a new installation and paid for at 100 percent of the contract unit price.

Fifty percent of the contract unit price will be paid upon final removal.

No payment will be made for portions of the barrier which the contractor can adjust or realign without dismantling and picking up, such cost being considered as included in the bid price for Temporary Concrete Barrier "Installation and Removal." The Engineer will be the sole judge as to whether devices are to be dismantled, picked up and reinstalled, or are to be adjusted or realigned.

701-5.02 Temporary Impact Attenuators (Installation and Removal): of the Standard Specifications is revised to read:

Temporary Impact Attenuation Devices shall include Sand Barrels and Energy Absorbing Terminals. Temporary Impact Attenuation Devices, measured as provided above, will be paid for at the contract unit price, which price shall be full compensation for the work, complete in place, as specified herein and as shown on the plans, including furnishing the devices with replacement parts, installing, removing and stockpiling the devices.

Fifty percent of the contract unit price for temporary impact attenuators will be paid upon satisfactory installation.

Should it be necessary to dismantle, pick up and reinstall attenuation devices during construction, the work of removing and reinstalling the devices will be considered a new installation and paid for at 100 percent of the contract unit bid price.

Fifty percent of the contract unit price will be paid upon final removal.

The Engineer will be the sole judge as to whether devices are to be dismantled, picked up and reinstalled or are to be adjusted or realigned. No additional payment will be made for devices which are adjusted or realigned, the cost being considered as included in the contract unit price paid for Temporary Impact Attenuator "Installation and Removal."

Measurement and payment for furnishing materials, equipment and labor and repairing attenuation devices that are damaged by the traveling public will be made in accordance with the requirements of Subsection 109.04 of the specifications.

No measurement or direct payment will be made for furnishing replacement parts and repairing devices damaged by other than the traveling public.

701-6.05 Truck-Mounted Attenuators: of the Standard Specifications is revised to read:

The accepted quantities of truck-mounted attenuators or trailer-mounted attenuators, measured as provided above, will be paid for at the unit bid price for truck-mounted attenuators per day of work site protection, which rate shall be full compensation for the work, complete, including, but not limited to, furnishing all materials; equipment; attached arrow panel or changeable message board; and labor (including the operator); and maintaining and repairing the truck and truck-mounted attenuator, or trailer-mounted attenuator and host vehicle, as specified herein and on the project plans. No adjustment to the unit bid price for truck-mounted attenuators will be made when trailer-mounted attenuators are provided, such price being considered as full compensation for the work, as specified herein, regardless of which type of attenuator is used to protect the work site. It shall be the contractor's responsibility to replace any damaged or destroyed parts of the truck-mounted attenuator or trailer-mounted attenuator and host vehicle at no additional cost to the Department.

701-6.06 Flashing-Arrow Panels, and Changeable Message Boards: the second paragraph of the Standard Specifications is revised to read:

The accepted quantities of changeable message boards, measured as provided above, will be paid for at the unit bid price per day, which price shall be full compensation for the work, complete, including incidental grading; furnishing, operating, maintaining, and relocating the boards on the work site; and providing all necessary labor. Signs, sign stands, Type II barricades, or vertical panels and lights that are used to delineate changeable message boards shall be paid for at the respective unit bid prices.

701-6.07 Pilot Services, and Flagging Services: the last paragraph of the Standard Specifications is revised to read:

The accepted quantities of flagging services provided by the DPS officers, measured as provided above, will be paid for at the predetermined hourly rate of \$65.26, as shown in the bidding schedule. Of this amount, \$44.00 per hour shall be remitted to the DPS officer, and \$12.75 per hour shall be remitted to DPS. The remaining \$8.51 per hour represents profit and overhead for both the prime contractor and subcontractor. Such price shall be considered full compensation for the work. No additional payment will be made for costs in excess of the predetermined rate, for overtime hours, and for travel time to and from the project, such costs being considered as included in contract items.

(704THRMO, 8/24/11)

SECTION 704 - THERMOPLASTIC PAVEMENT MARKINGS:

704-1 Description: of the Standard Specifications is revised to read:

The work under this section shall consist of cleaning and preparing pavement surfaces and furnishing and applying either white or yellow thermoplastic reflectorized pavement markings using extrusion or ribbon dispensing devices of the required shape and thickness to the prepared pavement surface at the locations and in accordance with the details shown on the project plans, the manufacturer’s specifications, and the requirements of these specifications.

704-2.02 Composition: of the Standard Specifications is revised to read:
(A) General:

The thermoplastic composition shall conform to the following requirements:

Component	Percent by Weight	
	White	Yellow
Binder (Min.)	20	20
Titanium dioxide (Min.)	10	-----
Yellow Lead-Free Pigment (Min.)	-----	1.5
Reflective glass inter-mix beads	30 – 45	30 – 45
Calcium carbonate or equivalent filler	20 – 42	20 - 42

The ingredients of the thermoplastic composition shall be thoroughly mixed and in a solid or sectionalized block, or free-flowing granular form. When heated in a melting apparatus, the material shall readily liquefy into a uniform solution. This solution shall be free from all skins, dirt, foreign objects or any other ingredient which would cause bleeding, staining, blotting, or discoloration when applied to the bituminous or concrete pavement surfaces.

The thermoplastic formulation shall utilize an alkyd binder. The alkyd binder shall consist of a mixture of synthetic resins, at least one of which is solid at room temperature, and of high-boiling-point plasticizers. At least one third of the binder composition and no less than eight percent by weight of the entire material formulation shall be solid maleic-modified

glycerol ester resin or solid maleic-modified pentaerythritol ester resin. The alkyd binder shall not contain any petroleum-based hydrocarbon resins.

(B) Reflective Glass Beads:

In addition to incorporating glass beads in the thermoplastic mix, glass beads shall be evenly applied to the surface of the molten material as specified in Subsection 704-3.02(G).

(C) Filler:

The filler shall be a white calcium carbonate or equivalent filler with a compressive strength of at least 5,000 pounds per square inch.

(D) Titanium Dioxide:

Titanium Dioxide shall conform to the requirements of ASTM D 476 for Type II (92 percent).

(E) Yellow Pigment:

The yellow pigment shall be heat resistant and lead free. The type of yellow pigment shall be at the option of the manufacturer provided that the material conforms to all color requirements in a stable and durable fashion as specified herein.

704-2.03(C) Retroreflectance: of the Standard Specifications is revised to read:
The white and yellow thermoplastic materials shall have the following minimum retroreflectance values at 86.5 degrees illumination angle and 1.5 degrees observation angle as measured by the Department, using an LTL-X Delta Retrometer or similar device, within 30 days after application to the roadway surface:

Product	Retroreflectance (millicandelas)
White	350
Yellow	200

704-2.03(E) Water Absorption and Specific Gravity: the last paragraph of the Standard Specifications is revised to read:

The specific gravity of the material, as determined by Section 16 of AASHTO T 250, shall be between 1.85 and 2.15.

704-2.03 Physical Characteristics of the Composition: of the Standard Specifications is modified to add:

(P) Color Stability:

Using accelerated weathering per ASTM G 155, Cycle 1, white color stability shall be measured for no color change after 500 hours of exposure, and yellow color stability shall be measured for no color change after 1000 hours of exposure.

704-2.04 Physical Requirements for Glass Beads: the second paragraph of the Standard Specifications is revised to read:

The inter-mix beads shall conform to AASHTO M 247 Type I, and may be coated or uncoated as recommended by the manufacturer. If uncoated beads are used, the thermoplastic formulation shall be configured to minimize settling of the intermix beads when the material is heated and applied.

Drop-on beads shall conform to the gradation requirements of AASHTO M 247 for Type I and Type III beads.

704-3.02(B) Material Selection and Compatibility: the second, third, and fourth paragraphs of the Standard Specifications are revised to read:

All materials shall be properly packaged and stored. Each container to be used on the project shall be clearly labeled to indicate the following information:

- Nature, type, and formulation of the material;
- Manufacturer, batch number, and date of manufacture;
- Application requirements and constraints; and
- Compatibility requirements and constraints, particularly those pertaining to equipment, storage, and other materials to be used.

Preparation and application equipment shall be in accordance with the plans and specifications, and shall conform to the recommendations of the materials manufacturer.

704-3.02(G) Thermoplastic Application: the first and second paragraphs of the Standard Specifications are revised to read:

The thermoplastic pavement marking material shall be extruded on to the pavement surface at a material temperature between 385 and 415 degrees F, depending on manufacturer's recommendations, ambient air and pavement temperatures, and the nature of the pavement surface. The contractor shall verify temperature requirements with a non-contact infrared thermometer as directed by the Engineer.

The thermoplastic material temperatures shall not exceed 450 degrees F. Material temperatures exceeding 440 degrees F shall be allowed for short periods of time; however, in no case shall the material be held for more than four hours at temperatures above 440 degrees F. Total heating time for any batch of material shall not exceed six hours. The contractor shall note in the temperature log the time when each batch of thermoplastic material is first heated. The start of heating time shall also be marked on the side of the kettle to which it applies.

704-3.02(G) Thermoplastic Application: the fifth and sixth paragraphs of the Standard Specifications are revised to read:

Drop-on glass beads shall be mechanically deposited into the thermoplastic material immediately after the thermoplastic marking is applied, using a double drop method. Each

drop shall be comprised of a minimum of six pounds of glass beads per 100 square feet of line (200 linear feet of six-inch stripe). One drop shall be Type I glass beads and the other drop shall be Type III glass beads. The contractor shall determine which type of glass bead is to be applied in each drop; however, both types shall be used. Double drop methods using all Type I or Type III beads will not be allowed.

The dispensers shall evenly distribute the beads in the thermoplastic material. Both Type I and Type III glass beads shall be embedded in the surface of the thermoplastic to a depth of between 50 and 60 percent of the bead diameter. If the glass beads do not adhere to the thermoplastic marking, operations shall be stopped until the problem has been corrected. All markings which do not meet the requirements of Subsection 704-2.03(C), as determined by the Engineer, shall be removed by the contractor and replaced at no additional cost to the Department.

Unless otherwise specified, all thermoplastic pavement markings shall be extruded, and shall be 0.090 ± 0.002 inches thick. The thermoplastic thickness shall be uniform and consistent throughout the total length of the marking project.

704-3.02(G) Thermoplastic Application: the last two paragraphs of the Standard Specifications are revised to read:

The finished thermoplastic line shall have well defined edges and be free from waviness. Lateral deviation of the thermoplastic line shall not exceed one inch in 100 feet. The longitudinal deviation of a painted segment and gap shall not vary more than six inches in a 40-foot cycle. The actual width of line shall be within the limits specified in the following table, according to the width of line called for on the plans:

Plan Width	Actual Width
4 inches	4 to 4-1/2 inches
8 inches	8 to 9 inches
Over 8 inches	± 1 inch

After application and sufficient drying time, the thermoplastic marking shall show no appreciable deformation or discoloration under local traffic conditions with air and road temperatures ranging from -10 to 180 degrees F. The drying time shall be defined as the minimum elapsed time, after application, when the thermoplastic pavement markings shall have and retain the characteristics required herein, and after which normal traffic will leave no impression or imprint on the newly applied marking. When applied within a temperature range of 400 ± 15 degrees F and thickness of 0.090 inches, the material shall set to bear traffic in not more than two minutes when the air and pavement surface temperatures are approximately $50 \pm$ three degrees F and not more than 10 minutes when the air and road surface temperatures are approximately $90 \pm$ three degrees. The Engineer may conduct field tests in accordance with ASTM D 711 to verify actual drying times.

ITEM 7360333 – PEDESTRIAN LIGHTING (SOLAR)

Description:

The work under this item consists of furnishing and installing solar powered lighting assembly including LED solar powered lights, lighting fixtures, mast arm, light pole, foundation and other miscellaneous items as required to complete the fully functional lighting system as specified herein and shown on project plans. The work shall also include but not be limited to site preparation, earthwork, and site restoration.

Materials:

The completed solar lighting systems and the attachment to the pole shall be designed to meet or exceed ASCE/SEI 7-10 specifications for 150-mph, Exposure D, Risk Category II wind event.

The contractor shall use the following LED Solar Lighting manufacturer or any other manufacturer who can meet the requirements specified in this specification.

- i. SEPCO
- ii. Greenshine
- iii. Phillips

Light Pole:

- The mounting pole shall be round galvanized steel or aluminum with minimum yield strength of 42,000 PSI and .125" wall thickness. Pole shall meet ASCE/SEI 7-10 for 150 mph, exposure D, and risk category II wind event with mast arm, luminaire, controller and battery mounted.
- All welds shall be ground smooth and all burrs and sharp edges shall be removed. Pole can be direct burial or bolt-down.
- Embedment depth shall be as shown on plans and shall meet all applicable AASHTO wind force ratings.
- Pole style shall be round taper.
- Furnish each pole with a 2"x4"x.125" (max) aluminum identification tag and submit details for approval. The contractor shall secure identification tag to pole at 5'-0" height with 0.125" stainless steel rivets or screws. The identification tag shall include the following information: Manufacturer's Name, "Pole Number", IN CASE OF LIGHT OUTAGE, PLEASE CONTACT SRPMIC Public Works Department at 480-362-5600.
- The excavation, backfill and concrete for foundation if required shall be per Subsection 731-2 of the Standard Specifications.

Photovoltaic Panels:

The solar panels shall contain single or multi monocrystalline solar cells, protected on the upper surface by low iron tempered glass. The solar module shall have an aluminum frame and protective bottom surface aluminum module pan for vandal

protection. All wiring shall be UV resistant rated. Stainless steel hardware shall be used throughout. Solar Panels shall carry a 20 year manufacturer's Full Warranty for 20% power loss. Panels shall meet IP67 waterproof rating.

Photovoltaic panels shall be IEC61215, IEEE1262 listed or UL1703 listed. No Cables and/wires will be allowed to be exposed.

LED Lamp (Luminaire):

- Luminaire housing shall be aluminum and corrosion resistant.
- Luminaire mounting height shall be minimum 24 feet.
- Color temperature rating shall be 3500 to 4500 Kelvin.
- The luminaire output shall be equivalent to 6000 lumen minimum, measured from mounting height of 24.0 feet from finished grade.
- The lamp shall provide the following minimum foot-candle (fc) illuminations measured at ground level:
 - i. 1.7 fc directly below fixture
 - ii. 1.2 fc at 10.0 feet radial to the fixture,
 - iii. 1.0 fc at 20 feet radial to the fixture, and
0.75 fc at 30 feet radial to the fixture.
- LED shall provide a minimum of 100,000 hour performance with 70% of initial lumen.
- Fixture shall provide Type II or Type III distribution in accordance with IESNA.
- Warranty:
 - Luminaire: 10 year Full Warranty
 - LED Lamp: 5 year Full Warranty
 - Ballast: 5 year Full Warranty

Controller:

- The controller/driver shall have dusk to dawn and intelligent timing and dimming functions with a minimum IP67 waterproof rating.
- Warranty: Controller/Driver: 5 Year Full Warranty

Battery:

- The batterie(s) must be designed to support system operation for a minimum of 13.5 hours run time for a minimum autonomy of 5 days.
- Battery enclosure shall be vandal proof and waterproof with lock and installed a minimum 12' height secured to pole with stainless steel or galvanized hardware.
- Warranty: Battery: Full replacement – 2 years and Pro-rated for 5 years.

Battery Enclosure:

- The enclosure must be vandal resistant and constructed of aluminum. The enclosure shall be vented, located on the main support arm below the solar panels installed, and access door loaded from front. All hardware must be stainless steel.
- Warranty: Enclosure: 20 years.

Brackets and Arms and Fasteners:

- Aluminum or stainless steel hardware and corrosion resistant.
- Brackets shall meet the 150MPH, Exposure D Wind Event classification. Luminaire must be mounted on the arm a minimum of 6 feet from the center of the pole.
- Warranty: Brackets, arms, and hardware: 20 years

Wire and Connections:

All wire connections shall be with weather resistant plugs, keyed to make installation quick and easy and to eliminate failure due to corrosion and incorrect wiring. No wiring will be allowed to be exposed.

Vandal Resistance:

The system must have the following elements which contribute to its being vandal resistant:

- Protective aluminum panel pan backing for solar panel(s).
- Tamper resistant stainless steel fittings.

Construction Requirements:

The contractor shall install solar lighting assembly per Sections 731, 732, 734, and 736 of the Standard Specifications, per manufacturer instructions and as specified herein.

Manufacturer's Instructions:

- The contractor shall obtain and distribute the copies of manufacturer instructions to parties involved in the installation, including two copies to the project consultant. In addition, the contractor shall maintain one set of complete instructions at the job site during installation and until completion.
- The contractor shall handle, install, connect, clean, condition and adjust products in accordance with such instructions and in conformity with this specifications.

1. Should job conditions or specified requirements conflict with manufacturer's instructions, consult with Engineer for further instructions.
 2. Do not proceed with work without clear instructions.
- Perform work in accord with manufacturer's instructions. Do not omit any preparatory step or installation procedure unless specifically modified or exempted by the Contract Documents.

Transportation and Handling:

- The contractor shall arrange deliveries of products in accordance with construction schedules, coordinate to avoid conflict with work and conditions at the site.
- Deliver products in undamaged condition, in manufacturer's original containers or packaging, with identifying labels intact with legible markings.
- Immediately upon delivery, inspect shipments to assure compliance with requirements of Contract Documents and approved submittals, and that products are properly protected and undamaged.
- Immediately on delivery, inspect shipment to assure:
 - i. Product complies with requirements of Contract Documents and reviewed submittals.
 - ii. Quantities are correct.
 - iii. Containers and packages are intact, labels are legible.
 - iv. Products are properly protected and undamaged.

Storage:

- The contractor shall store products in accord with manufacturer's instructions, with seals and labels intact and legible. Store products subject to damage by the elements in weather-tight enclosures.
- Maintain temperature and humidity within the ranges required by manufacturer's instructions. Store unpacked products on shelves, in bins or in neat piles, accessible for inspection.
- Provide substantial platforms, blocking or skids to support fabricating products above ground, prevent soiling or staining. Cover products, subject to discoloration or deterioration from exposure to the elements, with impervious sheet coverings. Provide adequate ventilation to avoid condensation.
- Stored Products shall be periodically inspected on a scheduled basis. The contractor shall maintain a log of inspections and shall make said log available to the Engineer on request.
- The contractor shall verify that storage facilities comply with supplier's product storage requirements, subject to Engineer's review and acceptance.
- The contractor shall verify that Supplier required environmental conditions are maintained continually.

Method of Measurement:

PEDESTRIAN LIGHTING (SOLAR) will be measured by the unit each for each lighting system furnished and installed as specified herein and shown on plans.

Basis of Payment:

PEDESTRIAN LIGHTING (SOLAR) measured as provided above will be paid for at the contract unit price per each, which price shall be in full compensation for the work, complete in place, including light pole, pole foundation if required, mast arm, solar panel, controller, LED solar luminaire, battery enclosure, wire and connections, warranty as specified, testing per manufacturer requirements if any, and other miscellaneous items required to complete the fully functional solar lighting assembly as specified herein and shown on plans.

SECTION 803 – LANDSCAPE PLATING MATERIALS

803-1 Description: of the Standard Specifications is modified to add:

The work under this section includes furnishing, grading, placing and compacting granite mulch, and rock mulch at the locations shown on the project plans and as specified herein. The work also includes the removal of weeds, trash and debris and the application of pre-emergent herbicide and water to all granite material areas. All work shall be completed in accordance with the details shown on the project plans and the requirements of these Special Provisions.

803-2.02 Decomposed Granite and Granite Mulch: of the Standard Specifications is modified to add:

The gradation for granite mulch shall be ¼" minus as specified below. The color of the granite mulch shall match the color of the Rock Mulch as specified in this specification. The salvage and reuse of existing granite material from the project area will not be allowed. All Granite Mulch material shall be new.

The contractor shall deliver a sample, in a labeled 5-gallon bucket, to the project site as directed by the Engineer for approval before delivery and installation. No Granite mulch shall be used on the project until the color and source have been approved by the Engineer. All granite mulch material shall come from a single source to ensure uniformity of color.

The granite mulch shall be in accordance with the gradation table shown below:

Passing Sieve	Percent
¼"	100
No. 10	50-70
#40	20-40
#200	10-20

Sources for Granite Mulch	
Kalamazoo Materials, Phoenix AZ	Ph. 520-631-8268
Pioneer Materials, Gilbert AZ	Ph. 480-926-8200
A&A Materials, Scottsdale AZ	Ph. 480-990-0557

The supplier of the Granite Mulch shall be responsible to be sure that all granite supplied meets the gradation requirements shown above. Any material supplied that does not meet the gradation requirements shall be removed and replaced by the contractor at no cost to the Department.

At the pre-construction conference, the following information shall be provided to the Engineer for all granite material proposed to be used on the project:

- One copy of the environmental permit for each granite source pit.
- Written acknowledgement from each supplier that they can provide the quantity of Granite Material required to complete the project.

803-2.03 Rock Mulch: of the Standard Specifications is modified to add:

The color of the Rock Mulch shall be Apache Brown, Tucson Mountain Brown, Navajo Brown or approved equal. The contractor shall deliver a sample, in a labeled 5-gallon bucket, to the project site as directed by the Engineer for approval before delivery and installation.

No Rock mulch shall be used on the project until the color and source have been approved by the Engineer. All rock mulch material shall come from a single source to ensure uniformity of color.

Gradation C Rock Mulch shall be in accordance with the gradation table shown below:

Gradation C Rock Mulch	
Sieve Size	Percent Passing
3.75 Inch	100
2.5 Inch	50 - 75
2 Inch	30 - 50
1 Inch	10 - 20

Suppliers for Rock Mulch	
Kalamazoo Materials, Phoenix AZ	Ph. 520-631-8268
Pioneer Materials, Gilbert AZ	Ph. 480-926-8200
A&A Materials, Scottsdale AZ	Ph. 480-990-0557

Rock shall be angular in shape; rounded rock is not acceptable. Depth of Rock Mulch shall be 2".

803-3.02 Decomposed Granite and Granite Mulch: of the Standard Specifications is modified to add:

Before placement of the Granite Material, the designated locations shall be completely free of all trash, debris, grass, weeds, and other unwanted vegetative growth and the subgrade shall be graded and compacted to promote proper drainage

A pre-emergent herbicide (Gallery, Surflan, Barricade or equivalent) shall be applied to all granite material areas in the manner recommended by the manufacturer to prevent germination of noxious weeds. The grading work shall be approved by the Landscape Architect. Where drainage outlets occur, the contractor shall adjust finished grade 2 inches below bottom of each drainage outlet.

The contractor shall repair all erosion features damaged on the project site during construction operations at no additional cost to the Department.

At the designated locations, Granite Mulch ($\frac{1}{4}$ " minus) shall be placed to a minimum depth of 2 inches after compaction, except as otherwise specified.

After rough spreading and placement of the granite material, it shall be raked evenly and thoroughly to blend the different gradation sizes of the material together.

During the final spreading and final grading operation, the surface of the granite material shall be passed over by spreading and grading equipment a minimum of two times with one set of wheels with flotation tires having a minimum width of 18 inches, to allow for equal compaction of the granite material. Compaction and thickness testing shall be performed per the direction of the Landscape Architect to ensure compliance to project requirements.

The use of conveyor belt type of equipment for placing granite material shall not relieve the contractor from the requirements for compacting the granite material as described herein.

After the final spreading, final grading and compaction operations, the contractor shall water settle the total thickness of the granite material to remove fines from the surface. The water settling operation shall be completed by applying water over the entire granite material surface area by the use of a water truck or other means as approved by the Landscape Architect. Water for water settling shall be applied in the amounts required by the Landscape Architect.

The contractor shall apply one application of an approved pre-emergent herbicide in accordance with the manufacturer's recommendations to prevent the germination of noxious weeds, or at a minimum of one pound per acre on all granite material areas following placement of the granite material and water settling. Water to activate the pre-emergent herbicide shall be applied to the areas of the herbicide application as recommended by the manufacturer's label or at a minimum equivalent to $\frac{1}{2}$ inch per acre. The amount of water specified by the manufacturer may be adjusted due to rainfall, as determined by the Landscape Architect.

When using herbicides, the contractor shall comply with all applicable portions of Subsection 803-3.02 of the Standard Specifications and report all herbicide applications to the Landscape Architect. The contractor shall remove and dispose of all dead grass and weeds.

803-4 Method of Measurement: the first and second paragraphs of the Standard Specifications are revised to read:

The Granite Mulch and Rock Mulch will be measured by the square yard of material in place at the specified thickness. The quantity for Granite Mulch ($\frac{1}{4}$ inch minus), and Rock Mulch (Gradation C) shall be as shown on the bid schedule, will be used for payment unless the contractor and the Engineer mutually agree that there is a variation in excess of 10 percent. If a variation greater than 10 percent exists, the Engineer will re-compute the Granite Material area from the project plans. Field measurement will not be performed.

803-5 Basis of Payment: of the Standard Specifications is revised to read:

The accepted quantities of Granite Mulch ($\frac{1}{4}$ inch minus), and Rock Mulch (Gradation C), measured as provided above, will be paid for at the contract unit price complete in place.

No additional measurement or payment will be made for erosion repair work, grading, compaction, pre-emergent herbicide and water, and removal and disposal of trash, debris, unwanted plant growth, and all other excess materials, the cost being considered as included in the price of these contract items.

SECTION 806 – TREES, SHRUBS AND PLANTS:

806-2.05 Prepared Soil: of the Standard Specifications is modified to add:

Prepared Soil for backfill in planting pits shall consist of existing clean site soil thoroughly tilled or loosened, free of stones and lumps larger than 2" thoroughly mixed with compost at a ratio of 1part compost to10 parts existing soil; and 1.5 Cups elemental sulfur per cubic yard. Foreign matter deemed objectionable by the Engineer will not be allowed. All excess soil that has objectionable stones shall be disposed of off the project site in a manner acceptable to the Engineer.

Compost shall meet the following requirements:

Compost in bulk or furnished in containers or bags, shall consist of composted organic vegetative materials and may contain worm castings. No animal manures or city biosolids shall be used in the composting or added to the compost. Prior to being furnished on the project, compost samples shall be tested for the specified microbiological and nutrient conditions, including maturity and stability, by a testing laboratory approved for testing of organic materials. Compost test written results shall be submitted to the Engineer for

approval prior to planting. Submitted test results shall be within nine months from the date of the official lab test.

Compost material shall be dark brown in color with the parent material composted and no longer visible. The structure shall be a mixture of fine and medium size particles and humus crumbs. The maximum particle size shall be within the capacity of the contractor's equipment for application to the constructed slopes. The odor shall be that of rich humus with no ammonia or anaerobic odors.

Bulk Compost shall also meet the requirements of Table 1:

TABLE 1	
Cation Exchange Capacity (CEC)	Greater than 45 meq/100 g
Carbon : Nitrogen Ratio (C : N)	Less than 20 :1
PH (of extract)	6.5 – 8.5
Organic Matter Content	Greater than 30%
Total Nitrogen (not added)	Greater than 1%
Maturity Index	Greater than 50% on Maturity Index at a 10 :1 ratio
Stability Indicator, CO ₂ Evolution: Biologically Available C (BAC)	Less than 4mg CO ₂ -C/g OM/day is desirable. From 4 through 8mg CO ₂ -C/g OM/day is acceptable. Greater than 8mg CO ₂ -C/g OM/day is <u>not</u> acceptable.
The CEC lab testing method shall refer to EPA9081 at the web link: http://epa.gov/osw/hazard/testmethods/sw846/pdfs/9081.pdf	

806-3.01 **General:** of the Standard Specifications is modified to add:

All trees shall be located outside of the clear zone. Stake all locations for approval by the Engineer before beginning excavation.

806-3.04 **Planting:** of the Standard Specifications is modified to add:

After the planting pits are refilled with amended soil, and prior to planting, the water harvesting basins and planting pits shall be pre-watered. The basins and planting pits shall be flood irrigated, filling the basins to a minimum depth of 2". Basins and planting pits shall be allowed to drain, then shall be filled with water again, to a minimum depth of 2".

Planting shall be accomplished during a maximum three-day period starting two days following the pre-wetting as specified. Areas not planted during the three day period shall be re-watered and allowed to dry as specified above.

Flood irrigation shall be performed in a manner that does not erode the basins.

806-5 Basis of Payment: of the Standard Specifications is modified to add:

No additional payment will be made for the preparation of Prepared Soil, removal and disposal of objectionable stone, or soil containing foreign matter.

SECTION 807 – LANDSCAPE ESTABLISHMENT:

807-1 Description: of the Standard Specifications is modified to add:

The contractor shall be required to maintain all landscaping areas that were installed under this contract. The contractor shall maintain these areas for a period of not less than 90 calendar days from the date of substantial completion. Coordination with the SRPMIC maintenance crews is a requirement of the work.

Phase I of the contract shall consist of all items under this contract other than Item 8070001 - Landscape Establishment. When all work is completed under Phase I of the contract and approved by the Resident Engineer, Phase II of the contract shall begin. No work or contract time under Phase II of the project shall begin until all work under Phase I is considered complete by the Resident Engineer.

807-2 Materials: of the Standard Specifications is modified to add:

The water used during Landscaping Establishment to properly maintain the plant material will be furnished by the SRPMIC at sources from within the project limits, at no charge to the contractor. The contractor is responsible for transporting the water.

During the Landscaping Establishment period, the contractor shall provide plant material replacements to replace dead and unhealthy plants as stated in the Standard Specifications as follows:

Original Size	Replacement Size
1 gallon	5 gallon
5 gallon	15 gallon
15 gallon	24 inch box
24inch box	36 inch box
36 inch box	48 inch box

807-3.01 General: of the Standard Specifications is modified to add:

The landscape establishment period for this project shall be 90 calendar days.

807-3.02 Planted Stock and Seeding Establishment: of the Standard Specifications is modified to add:

The contractor shall provide adequate water to each installed plant to maintain optimum health during the establishment period.

Watering Schedule for Newly Planted Trees (Minimum Requirements)			
	<u>Winter/Spring</u> <u>Dec 1 – April 30</u>	<u>Summer</u> <u>May 1 – Sept 30</u>	<u>Fall</u> <u>Oct 1 – Nov 30</u>
<u>Weeks 1 - 3</u>	Every three days	Daily when temps are 100 degrees or higher Every other day when temps are below 100 degrees	Every three days
<u>Weeks 4 - 6</u>	Every seven days	Every two days when temps are 100 degrees or higher Every three days when temps are below 100 degrees	Every five days
<u>Weeks 7 - 9</u>	Every seven days	Every three days	Every seven days
<u>Weeks 10 - 12</u>	Every ten days	Every three days when temps are 100 degrees or higher Every five days when temps are below 100	Every seven days
<u>After Week 12</u>	Every ten days	Every three days when temps are 100 degrees or higher Every seven days when temps are below 100 degrees	Every ten days

NOTES:

1. Contractor shall adjust watering schedule based on rainfall received. Water shall not be applied if the soil is saturated.
2. The amount of water to be applied per tree at each watering is five gallons minimum. This water must be in contact with root ball of tree.
3. Watering shall be accomplished by either flooding the water harvesting basin to a minimum depth of 1"; or by filling the berms around individual trees to a minimum depth of 1" within the larger water harvesting basin. When filling individual berms, each tree must receive a minimum of five gallons of water per watering occurrence. Refer to Landscape Details for acceptable location and size of berms within water harvesting basins.
4. Every watering should moisten the soil to a minimum depth of 18". Depth of watering shall be verified by inserting a metal rod (3/8 or greater in diameter) into the ground 10" away from trunk of tree. Rod should push (with minimal pressure) a minimum of 18" into the ground.
5. Watering shall be performed in a manner that does not erode the basins and/or berms.

807-5 **Basis of Payment:** of the Standard Specifications is modified to add:

Landscape Establishment measured as provided above, will be paid for at the contract lump sum price, which price shall be full compensation for the work, complete in place, including application of pre-emergent herbicide, plant material replacement if required, control of weeds, and traffic control required during Landscape Establishment phase and as described and specified herein.

All costs associated with truck watering, including but not limited to, trucks, repair of berms, and labor, shall be included in the lump sum price for this bid item.

ITEM 8080195 - REMOVE AND SALVAGE VALVE (8 INCHES):
ITEM 8080263 - VALVE (8 INCHES) (DETAIL L):

1.0 Description:

The work under this item shall consist of removing valve box and cover, removing operator nut with the valve open, salvaging existing valve in place, and installing a new valve and valve box per details shown on the project plans and in accordance with these Special Provisions. These items shall include removal and installation of all waterline and pipe fittings necessary to complete the removal and installation as shown on the project plans and as specified herein.

2.0 Materials:

All material shall conform to the requirements of MAG Standard Specifications.

In accordance with AAC R18-4-213, all materials which may come into contact with drinking water shall conform to the National Sanitation Foundation Standards 60 and 61.

3.0 Construction Requirements:

The contractor is responsible for making all pavement cuts, patches, and traffic control associated with the installation valve and removal of valve box cover, riser, and operator nut. The contractor shall remove and salvage existing valve, valve box, and operator nut per Sections 202 and 808 of the Specifications and as specified herein and shown on plans.

Only SRPMIC forces are authorized to open and close existing water valves within the SRPMIC.

The SRPMIC will require a complete shutdown of the 8" water line and put some businesses/residences out of water. The contractor shall notify affected customers of the water shutdown at least 48 hours in advance and coordinate valve shutdowns with Stuart Wilson, Water Section Manager (480-362-2735) one week in advance. This may require night time work when the businesses are closed to minimize impact to the customers. The contractor shall chlorinate and flush the 8" main to the SRPMIC representative's satisfaction before the line is placed back in service.

4.0 Method of Measurement:

REMOVE AND SALVAGE VALVE (8 INCHES) will be measured by unit each for each water valve, valve box and operator nut successfully removed and salvaged as specified herein.

VALVE (8 INCHES) (DETAIL L) will be measured by each for each valve successfully furnished and installed.

5.0 Basis of Payment:

VALVE (8 INCHES) (DETAIL L) measured as provided above, will be paid for at the contract unit price per each, which price shall be full compensation for the work, complete in place including necessary excavation, backfill, testing, thrust block, pipe fittings, valves, valve box, and pavement replacement if required, and as specified herein and shown on plans.

REMOVE AND SALVAGE VALVE (8 INCHES) measured as provided above, will be paid for at the contract unit price per each, which price shall be full compensation for the work, complete in place including removal, salvage, and transportation of valve, valve box, and operator nut as specified herein and shown on plans.

ITEM 8080651 – FIRE HYDRANT:

Description:

The work under this item shall consist of installing new fire hydrants at locations shown on the project plans and in accordance with these Special Provisions.

Fire Hydrant installation shall be conducted in accordance with the Salt River Pima-Maricopa Indian Community (SRPMIC) latest Water Notes, MAG Specification Sections 610, 611 and MAG Standard Details 360, 345 and 346 at the locations shown on the design plans.

Materials:

All the material for the fire hydrant assembly shall be per Sections 610, 611, 630, 750, and 756 of the MAG Uniform Standard Specifications.

All concrete shall be in compliance with Section 1006 of these special provisions and concrete equivalence table under General Requirements of these Special Provisions.

All ductile iron pipes shall be in compliance with Section 750.2 of the MAG Uniform Standard Specifications.

Construction Requirements:

The fire hydrant shall be installed per MAG Uniform Standard Specifications Section 756 and MAG Standard Detail 360-1 as well as Details 345 and 346.

The contractor shall extend water line pipe per Section 610 of the MAG Uniform Standard Specifications.

All excavation, trenching, bedding and backfill shall be in accordance with Section 601 of the MAG Uniform Standard Specification.

Method of Measurement:

FIRE HYDRANT will be measured by the unit each for each fire hydrant assembly furnished and installed as specified herein and shown on the project plans.

Basis of Payment:

FIRE HYDRANT, measured as provided above, will be paid for at the contract unit price per each, which price shall be full compensation for the work, complete in place, including necessary excavation, backfill, testing, and installation of fire hydrant, extension of water line up to fire hydrant, and all pipe fittings, and as specified herein and shown on plans.

No separate measurement or direct payment will be made for 6-inch ductile iron water pipe (restrained joints) and fire hydrant reflector (blue), the cost being considered as included in the price of this item.

(810ERCON, 3/24/11)

SECTION 810 - EROSION CONTROL AND POLLUTION PREVENTION:

810-2.06(A) General: the first paragraph of the Standard Specifications is revised to read:

Sediment logs, sediment wattles, and fiber rolls shall be manufactured or constructed rolls of fiber matrix, secured with netting, and used for the purpose of controlling erosion by slowing high flow water velocity and trapping silt sediments. Netting for fiber rolls and sediment wattles shall have a minimum durability of one year after installation, and shall be tightly secured at each end of the individual rolls. All wheat straw used in sediment logs, sediment wattles, and fiber rolls shall comply with the requirements of Subsection 810-2.05(B).

(901MOBE, 09/18/12)

SECTION 901 MOBILIZATION:

901-5 Basis of Payment: of the Standard Specifications is revised to read:

Payment for mobilization, measured as provided above, will be made at the contract lump sum price, which shall be full compensation for supplying and furnishing all materials, facilities and services and performing all the work involved as specified herein.

Partial payments under this item will be made in accordance with the following provisions. Reference herein to the adjusted contract shall mean the original contract amount exclusive of mobilization:

The first payment of the lump sum price for mobilization will be paid after the Preconstruction Conference provided that all submissions required under Subsection 108.03 are submitted by the contractor at the Preconstruction Conference to the satisfaction of the Engineer. The amount paid for the first partial payment will be in accordance with Table 901-1.

The second payment of the lump sum price for mobilization will be made when the Engineer has determined that a significant amount of equipment has been mobilized to the project site which will be used to perform portions of the contract work. The amount paid for the second partial payment will be in accordance with Table 901-1.

The third payment of the lump sum price for mobilization will be made on the first estimate following completion of five percent of the adjusted contract. Such percentage determination will not include partial payments for material on hand. The amount paid for the third payment will be in accordance with Table 901-1.

The fourth payment of the lump sum price for mobilization will be made on the first estimate following completion of 10 percent of the adjusted contract. Such

percentage determination will not include partial payments for material on hand. The amount paid for the fourth payment will be in accordance with Table 901-1.

The total sum of all payment shall not exceed the original contract lump sum price for mobilization, regardless of the fact that the contractor may have, for any reason, shut down its work on the project or moved its equipment away from the project and back again.

TABLE 901-1 AMOUNT ALLOWED FOR MOBILIZATION DURING THE LIFE OF THE CONTRACT		
Contract Amount: \$	% Of Contract	Basis Of Payment
0 - 5,000,000	12% *	25% of the lump sum price for mobilization or 3% of the original contract amount, whichever is less.
5,000,000 +	10% *	25% of the lump sum price for mobilization or 2.5% of the original contract amount, whichever is less.
* If the price bid for mobilization exceeds this percentage, any excess will be paid to the contractor upon completion of the contract.		

The adjustment provisions in Section 104 and the retention of funds provisions in Section 109 shall not apply to the item of mobilization.

When other contract items are adjusted as provided in Section 104, and if the costs applicable to such items of work include mobilization costs, such mobilization costs will be considered as recovered by the contractor in the lump sum price paid for mobilization, and will be excluded from consideration in determining compensation under Section 104.

When mobilization is not included as a contract item, full compensation for any necessary mobilization required will be considered as included in the prices paid for the various contract items involved and no additional compensation will be made.

ITEM 9140031 TRASH RECEPTACLE (ABOVE GROUND)

Description:

The work under this item consists of furnishing and installing trash receptacles complete, at the locations shown on the project plans and in accordance with these Special Provisions. The work also includes installing trash receptacles with vandal resistant mounting hardware.

Materials:

Trash receptacles shall be composed of metal framework: expanded mesh, perforated mesh, and steel slats are acceptable. Wood or plastic material is not acceptable. Structural members shall be structural steel tubing. Framework shall be welded to frame; mechanical connections are not acceptable.

Trash receptacles shall be provided for surface-mounting. Mounting and installation hardware shall be heavy gauge, vandal resistant, corrosion-resistant galvanized steel, or stainless steel, as specified by the trash receptacle manufacturer.

The finish shall be a multi-stage powder-coating system, including washing, corrosion resistant undercoating, and final, baked-on polyester color coat. Finish color shall match of color of the bench.

Cut sheet and specifications of trash receptacle shall be provided to Engineer for approval prior to purchase of trash receptacle.

Suppliers		
Wabash Valley Mesa, AZ	Prestige Series	480-892-2266
Patterson-Williams Mesa, AZ	Xander Collection	888-442-2925
Play it Safe Playground and Park Equipment Mesa, AZ	Leisure Craft	480-347-8486

Construction Requirements:

Trash receptacles shall be located as shown on the project plans. Stake all locations for approval by the Engineer before beginning installation. Install trash receptacles in accordance with the manufacturer's instructions. Installation shall be plumb, level, and firm.

Do not scratch, abrade or otherwise damage finish during installation. Any and all damage to the finish shall be repaired in accordance with the manufacturer's instructions. Extensive or irreparable damage shall be grounds for rejection and replacement.

Method of Measurement:

Trash Receptacle (Above Ground) will be measured by the unit of each for each unit furnished and installed as specified herein and shown on the project plans. .

Basis of Payment:

Trash Receptacles (Above Ground) measured as provided above will be paid for at the contract unit price per each, which price shall be full compensation for the work complete in place, including necessary hardware and as described herein and shown on the project plans.

ITEM 9140072 BENCH

Description:

The work under this item consists of furnishing and installing benches complete, at the locations designated on the project plans and in accordance with these Special Provisions. The work includes installing benches with vandal resistant mounting hardware.

Materials:

Benches shall be backless. Seat may be a single panel surface, or three separate surfaces.

Benches shall be six (6) feet in length. Structural members shall be structural steel tubing. Seat material shall be metal: expanded mesh, perforated mesh, and steel slats are acceptable. Wood or plastic seat material is not acceptable. Seat panels shall be welded to frame; mechanical connections are not acceptable.

Benches shall be provided for surface-mounting. Mounting and installation hardware shall be heavy gauge, vandal resistant, corrosion-resistant galvanized steel, or stainless steel, as specified by the bench manufacturer.

The finish shall be a multi-stage powder-coating system, including washing, corrosion resistant undercoating, and final, baked-on polyester color coat. Finish color shall be dark grey or black, as approved by the Engineer.

Cut sheet and specifications of bench shall be provided to Engineer for approval prior to purchase of bench.

Suppliers		
Wabash Valley Mesa, AZ	Prestige Series	480-892-2266
Patterson-Williams Mesa, AZ	Xander Collection	888-442-2925
Play it Safe Playground and Park Equipment, Mesa, AZ	Leisure Craft	480-347-8486

Construction Requirements:

Benches shall be located as shown on the project plans. Stake all locations for approval by the Engineer before beginning installation. Install benches in accordance with the manufacturer's instructions. Installation shall be plumb, level, firm, and aligned parallel with the nearest edge of pavement.

Do not scratch, abrade or otherwise damage finish during installation. Any and all damage to the finish shall be repaired in accordance with the manufacturer's instructions. Extensive or irreparable damage shall be grounds for rejection and replacement.

Method of Measurement:

Benches will be measured per each furnished and installed, as specified herein and shown on the project plans.

Basis of Payment:

Bench measured as provided above will be paid for at the contract price per each, which price shall be full compensation for the work complete in place, including necessary hardware and as described herein and shown on the project plans.

(923CBOJT, 04/14/15)

ITEM 9230002 - CONTRACTOR BASED ON-THE-JOB TRAINING:

1.0 Description:

1.01 Purpose:

The contractor shall provide on-the-job training (OJT) aimed at moving minorities, women, economically disadvantaged, and veteran trainees into journey-level positions in various types of construction trades or job classifications through a contractor-based OJT program. The contractor-based approach assigns contractors annual training goals for a specific number of trainees and hours. The contractor is provided the flexibility to meet the annual trainee and training hour goals on any transportation projects in the United States throughout the year, rather than on a project-by-project basis. Contractors may include ADOT and non-ADOT projects as long as more than 40 percent of the training hours are completed on ADOT projects.

Training of minorities and women toward journey-level status is a primary objective of this Training Special Provision. Accordingly, the contractor shall make every effort to enroll minority, women, economically disadvantaged, and veteran trainees to the extent that such persons are available within a reasonable area of recruitment. The contractor will be responsible for demonstrating the steps that it has taken in pursuance thereof, prior to a determination as to whether the contractor is in compliance with this Training Special Provision. This training commitment is not intended, and shall not be used, to discriminate against any applicant for training, whether a member of a minority group or not.

1.02 Program Summary:

The Department has established a Contractor Based On-The-Job Training Pilot Program for a one year period from July 1, 2015 to June 30, 2016. All successful bidders will automatically be placed in the Pilot Program beginning on July 1, 2015. Standard OJT requirements associated with individual projects will no longer be applied at the project level for new projects. OJT requirements will be applicable on an annual basis for each contractor performing work on ADOT projects. During the OJT Pilot Program each

contractor meeting the threshold described in Subsection 1.04 of this Training Special Provision will be required to provide training for **one trainee** for a minimum of **1000 hours**. The 1000 hours may be completed by one or more trainees; if a trainee reaches program completion before completion of the 1000 hours then an additional enrolled_trainee may be used to complete the remaining training hours. For example, if a trainee reaches program completion after 700 hours, the contractor is required to provide an additional 300 hours of training to an enrolled trainee in order to meet its annual OJT goal.

Contractors may also assign OJT Trainees to be trained by subcontractors on any project with ADOT approval. However, the contractor will only receive credit towards its annual goal for hours earned by its own OJT Trainees. The contractor's OJT Trainees must be employed by the contractor and be enrolled in an approved training program as described in Subsection 2.01 of this Training Special Provision.

Hours earned by a subcontractor's OJT Trainees on a project will be credited to that subcontractor's annual training goal and the contractor shall reimburse the subcontractor in accordance with Subsection 2.02 of this Training Special Provision.

No employee shall be employed as a trainee in any classification in which they have successfully completed a training course leading to journey-level status or in which they have been employed at journey-level status. The contractor shall satisfy this requirement by including appropriate questions in the employment application or by other suitable means. Regardless of the method used, the contractor's records shall document the findings in each case.

The trainees shall be distributed among the work classifications on the basis of the contractor's needs and the availability of journey-level status individuals in the various classifications. The ratio of apprentices and OJT Trainees to journey persons shall not be greater than permitted by the terms of the approved training program being utilized. When a specific ratio is not provided, the ratio of apprentices and OJT Trainees to journey persons expected to be on the contractor's work force during normal operations shall fall between 1:10 and 1:4, pursuant to 23 CFR 230.111(c)(10).

1.03 Definitions:

"OJT Trainee" herein refers to (a) a minority, female, veteran or economically disadvantaged individual enrolled in either a State of Arizona registered apprenticeship program or ADOT's OJT program and (b) any other individual ADOT approves for enrollment in such an apprenticeship or OJT program and for credit toward the OJT Goals.

"Program Completion" herein refers to the point in time when a trainee in the ADOT OJT Program has completed the required number of levels and hours of training within a calendar year for a designated craft classification or a registered Apprenticeship program, or has achieved journey-level status.

"Journey-Level Status" applies to a person who has completed a registered apprenticeship program or is an experienced worker, not a trainee, and is fully qualified and able to perform all of the duties of a specific trade without supervision.

“Economically Disadvantaged Persons” applies to a person who:

- Receives, or is a member of a family and/or household, which receives cash payments under a Federal, State, or local income-based public assistance program.
- Is a member of a family and/or household that receives (or has been determined within the 6-month period prior to registration for the program involved to be eligible to receive) Food Stamps/EBT card under the Food Stamp Act of 1977.
- Is a foster child on behalf of whom State or local government payments are made.
- Does not have a high school diploma or GED.
- Is from a family whose total annual household income is below the federal poverty limits. See Appendix A of the *OJT Guidelines and Procedures* document found at <http://azdot.gov/business/business-engagement-and-compliance/on-the-job-training-program/ojt-contract-compliance>.

1.04 Annual Training Goal:

During the OJT Pilot Program, each contractor that was awarded ADOT federally funded construction contracts, as a prime contractor, for \$2,000,000 or more between October 1, 2013 and September 30, 2014 will be assigned an annual OJT goal to train a minimum of one trainee for a minimum of 1000 hours. The trainee shall receive training in the same construction trade or job classification from July 1, 2015 to June 30, 2016 with the aim of eventually achieving journey-level status. If the contractor is not awarded an ADOT federally funded contract during the pilot program period, they will not be required to meet the assigned annual OJT goal.

If a contracting firm is not assigned an annual OJT goal, it is not required to provide on-the-job training on ADOT projects regardless of whether OJT hours are included in the project bid schedule. If the contractor chooses to provide training to a registered OJT trainee on an ADOT federal-aid project although they do not meet the above criteria, the contractor will be reimbursed as described in Subsection 2.02 of this Training Special Provision.

The contractor shall make every possible effort to provide additional trainees with training and shall see that all trainees are afforded every opportunity to participate in as much training as is practically possible to provide. Contractors will not be required to meet OJT goals on individual contracts, but must meet the assigned annual training goal for the assigned number of OJT Trainees and hours by the end of the year.

Since not every OJT Trainee that enrolls in the program will complete the program, the contractor is encouraged to enroll sufficient numbers of OJT Trainees (well beyond the number of its annual training goal) to help ensure that it will meet its annual OJT goal if some OJT Trainees drop out of the program during the year. The contractor must carefully screen, hire, and support trainees that are likely to meet or exceed the 1000 hours of OJT during the calendar year, eventually earn journey-level status, and be retained as part of its workforce.

2.0 Requirements:

2.01 Approved Training Programs:

For this Contractor-Based OJT Program, the ADOT Business Engagement & Compliance Office (BECO) will only recognize two types of contractor based training programs. The programs are:

- The Department's OJT Program as approved by FHWA and described at <http://azdot.gov/business/business-engagement-and-compliance/on-the-job-training-program/ojt-contract-compliance> or
- Registered Apprenticeship and OJT programs registered with the Bureau of Apprenticeship, U.S. Department of Labor and/or the State of Arizona.

Contractors must use one or both of these programs. The contractor shall indicate which OJT program it is using for each trainee on his/her Trainee Enrollment form. It is the intention of these provisions that training be provided in the construction crafts rather than for office support positions. Some off-site training is permissible as long as the training is an integral part of an approved training program and does not comprise a significant part of the overall training.

All training programs shall be administered in a manner consistent with the equal employment obligations of federal-aid highway construction contracts. The Department reserves the right to request documentation that the contractor's training program fulfills these obligations. Contractors shall ensure that each trainee does not exceed the maximum number of training hours required for the completion of the selected training program unless prior approval is received from the Engineer.

2.02 Reimbursement:

The contractor will be reimbursed \$3.00 per hour of training provided to a trainee on an ADOT federal-aid project up to the maximum number of hours approved for reimbursement on the project and shown in the project bid schedule. Reimbursement will not be made for a trainee's hours that exceed the maximum number of training hours required for the completion of his/her training program. In addition, the contractor will not be reimbursed for hours in excess of the maximum training hours shown on the project bid schedule unless written approval is received in advance from the Engineer.

The maximum number of hours approved for reimbursement on each ADOT federal-aid contract will be calculated by the Department, based on the engineer's estimate for the project and the contract time.

The trainee will be paid the appropriate trainee Davis-Bacon wage rates for training classifications/crafts on federally-funded projects. The contractor shall compensate OJT Trainees according to pay levels and percentages outlined in the ADOT Training Program Manual found at <http://azdot.gov/business/business-engagement-and-compliance/on-the-job-training-program/ojt-contract-compliance>.

Contractors shall reimburse subcontractors for the subcontractor's trainees on ADOT federally funded projects at least 75-percent of the amount paid to the contractor by the Department per training hour.

2.03 Submittals:

The contractor shall complete and submit the following to BECO:

- *OJT Program Trainee Enrollment Form* for approval for each proposed minority, female, veteran, economically disadvantaged, and other OJT Trainee throughout the year as each individual is hired. The form shall be submitted to BECO within the first week of hire if working on an ADOT project. If the contractor is working on an ADOT project, the form shall also be submitted to the Engineer.

In addition, if the contractor is working on an ADOT construction project, the contractor shall submit the *OJT Program Trainee Enrollment Forms* of all current trainees to the Engineer at the Preconstruction Conference.

- Contractors shall enter trainee hours worked on ADOT construction projects on a weekly basis into the web-based Labor Compliance System, LCPtracker. Trainee hours not entered into LCPtracker by the 15th of each month for the preceding month will be considered delinquent. Trainee hours on non-ADOT contracts shall be entered into LCPtracker on a monthly basis.
- *OJT Monthly Progress Report Form* shall be submitted for each month by the 15th of the following month.
- *OJT Monthly Trainee Progress Report Form* shall be submitted for each trainee for each month by the 15th of the following month.
- *OJT Trainee Termination/Completion Form* when an OJT Trainee completes 1000 or more hours in the same construction trade or job classification within a calendar year, achieves journey-level status, terminates employment with the contractor, or withdraws from the OJT program.
- *OJT Annual Summary Report Form* by July 15, 2016 for the Pilot Program as described in Subsection 4.02 of this Training Special Provision.

The contractor's June monthly reports and uploads into LCPtracker submitted after July 31st will not be accepted or considered towards goal attainment for the previous calendar year.

All forms and Guidelines and Procedures for the Contractor-Based OJT program are available online at <http://azdot.gov/business/business-engagement-and-compliance/on-the-job-training-program/ojt-contract-compliance>.

The contractor shall retain the training records for all OJT Trainees for a period of five years following the completion of the trainee's work on contracts documenting his performance under this Training Special Provision. Such records shall be available at reasonable times and places for inspection or review by ADOT and the Federal Highway Administration.

The contractor is required to meet the assigned annual OJT goal if they are awarded federally funded ADOT construction contract(s) during the year. In anticipation of obtaining an ADOT contract, contractors are encouraged to begin registering trainees with the Department using the OJT Program Trainee Enrollment Form at the beginning of the year. In order to count training hours toward the goal, the trainee must be registered with the Department and their hours must be entered monthly into the LCPtracker system as described in this specification.

2.04 OJT Liaison:

The contractor shall designate an OJT Liaison that shall be responsible for monitoring and administering its OJT Program and monitoring the trainees' progress. The OJT Liaison shall serve as the point of contact for the Department regarding information, documentation, and conflict resolution relating to the contractor's OJT program. The contractor shall furnish each trainee a copy of the Training Program, monthly reports that reflect their training hours accumulated to date and other documentation related to the training program. The contractor shall further make every reasonable effort to provide training that develops the skills outlined in the training program. The contractor shall furnish each trainee, upon successful completion of their training program, a certificate showing the type and length of training satisfactorily completed.

2.05 Training Hours:

Credit towards the contractor's annual training goal shall be earned as follows:

- Credit will be allowed towards the contractor's annual goal for the year in which the trainee entered training.
- Credit will be allowed for each trainee employed on a project, pending official enrollment, for all documented hours completed.
- Credit will be allowed for a terminated trainee if the contractor demonstrated a good faith effort to meet the goal and the trainee completed more than 90% of the training hours required for the year.

Credit will not be allowed when the contractor fails to provide the required training or does not make a satisfactory good faith effort to meet the requirements of the program.

2.06 Program Completion:

A trainee will be considered to have completed the program once the trainee completes the required number of levels and hours of training for the same craft or classification within a year, completes a registered apprenticeship program, or achieves journey-level status as determined by the contractor. Once a trainee completes a specific training level for a classification, the contractor will not be permitted to resubmit that trainee for enrollment or reimbursed at that same level, unless approved in advance by the Engineer.

Upon completion of the program, the contractor shall notify BECO so that a Certificate of Completion can be issued to the trainee showing the type and length of training satisfactorily completed.

3.0 Good Faith Efforts:

Whenever a contractor requests ADOT approval of someone other than a minority, economically disadvantaged individual, woman, or veteran for credit towards its annual training goal, the contractor shall submit documented evidence of its Good Faith Efforts to fill that trainee position with a minority, female, veteran, or economically disadvantaged individual. Documentation of Good Faith Efforts shall be made by completing and submitting the Good Faith Effort form and supporting documentation to BECO.

Good Faith Efforts are those efforts designed to achieve equal opportunity through positive, proactive, and continuous result-oriented measures (23 CFR 230.409(g)(4)). Good Faith Efforts should be made as trainee hiring opportunities arise. More information on Good Faith Efforts is available in the *OJT Guidelines and Procedures* document available on BECO's website.

4.0 ADOT Program Monitoring:

4.01 Site Visits:

BECO may conduct periodic site visits to a contractor's worksite to review OJT Program compliance, as part of a FHWA required Contractor Compliance Program Review process. The site reviews may include, among other activities, interview of trainees, the contractor, and its employees. The contractor shall cooperate in the review and make its employees available. The contractor's OJT Liaison shall be available to meet with BECO staff as well as be available to respond to periodic emails and phone calls from BECO to check on the progress of OJT Trainees. BECO will make every effort to ensure minimal disruption to a contractor's work.

4.02 Determination of Compliance:

An OJT Annual Summary Report Form for the previous 12 months (July 1, 2015 to June 30, 2016) shall be submitted to BECO by July 15, 2016 for the Pilot Program. The report shall provide an accurate account of all trainee hours; identifying each trainee by name, ethnicity, and gender and identifying each project and/or contract, listing the contracting agency, whether they are ADOT projects/contracts, whether they are federally funded

projects/contracts, and the trainee hours attributed thereto. The report shall include written explanation and documentation of Good Faith Efforts, if the contractor fails to meet its goal. BECO will review the contractor's OJT Monthly and Annual Reports and Good Faith Effort documentation. BECO will determine whether the contractor has met the assigned annual training goal or made a good faith effort to do so. BECO will communicate its decisions in writing to the contractor.

If a contractor has neither attained its goal nor submitted adequate Good Faith Efforts documentation, ADOT will issue a Show Cause Notice outlining its findings of non-compliance. Within 30 days of receiving the Show Cause Notice, the contractor may submit a written response to the Show Cause Notice providing argument and evidence in opposition to the Department's findings of non-compliance.

If a contractor fails to submit a written response to the Show Cause Notice within the specified period or the written response to the Show Cause Notice does not cause ADOT to change its findings of non-compliance, ADOT will issue its Final Notice to the Contractor regarding the non-compliance.

ITEM 9240114 – MISCELLANEOUS WORK (REMOVAL AND DISPOSAL OF TRASH, DEBRIS, AND LITTER):

Description:

The work under this item includes removal and disposal of trash, debris, and litter within the project limits that is not generated by contractor operations.

Construction Requirements:

The work under this item shall include furnishing two laborers, driver and truck, trash bags, dumpsters, and dump fees in accordance with these special provisions.

The contractor will be required to provide a minimum of one site visit per month during Phase I contract operations and four site visits per month to the project during the Landscape Establishment project and to monitor and provide the services as described herein and as directed by Landscape Architect.

The contractor shall include the work described for this item on his work schedule, submitted monthly during the Landscaping Establishment Phase in accordance with Section 807 Landscaping Establishment of these Special Provisions.

Method of Measurement:

Removal of Trash, Debris, and Litter will be measured for payment in 1-hour increments during Phase 1 and Phase 2 of the contract.

Basis of Payment:

Removal and Disposal of Trash, Debris and Litter, accepted as measured above, will be paid per 1-hour increments at the contract unit price which shall be full compensation for the work, complete, as described above, including providing adequate laborers, trucks and drivers, trash bags, dumpsters, paying dump fees and all other items of work required for this activity. No measurement or payment will be made for the removal and disposal of trash generated by the contractor.

ITEM 9240129 MISCELLANEOUS WORK (WATER HARVESTING BASIN):

Description:

The work under this item shall consists of constructing water harvesting basin by excavating, backfilling, grading, contouring, shaping and smoothing areas of water harvesting basins at the locations shown on the project plans and as specified herein.

Construction Requirements:

Prior to starting any work on this item, the contractor shall stake all water harvesting basins areas in close conformity to the areas and locations shown on the project plans and obtain approval from the Engineer for all water harvesting basin locations. In the event that existing field conditions such as subsurface utilities, pipes, structures, impervious material or inadequate drainage necessitate relocation of water harvesting basins, the Engineer will designate new locations prior to starting excavation and grading for this item.

The water harvesting basin areas shall be excavated per Section 203 of the Standard Specifications and graded to the lines and grades designated on the project plans and as approved by Engineer. All objectionable materials, trash, debris, weeds, and stones larger than two inches in diameter shall be removed from these areas and disposed of in a manner acceptable to the Engineer. The side slopes of the water harvesting basins shall not be steeper than 3:1, horizontal: vertical. The depth of the water harvesting basins shall not exceed 6 inches. The final surfaces shall be raked smooth.

The contractor shall construct one sample water harvesting basin for the Engineer's approval after the staking field review. Location of the sample water harvesting basin shall be determined by the Engineer during staking field review.

The contractor shall perform drainage tests in water harvesting basin locations at 500-foot intervals along the project length. The tests shall consist of excavating pits two-feet by two- feet by six inches deep and filling the pits with six inches of water twice within two hours. The drainage rate of the second filling shall be at least six-inches per hour. The Engineer shall be present during the drainage rate testing to observe drainage testing activities and results. The contractor shall notify the Engineer of all testing schedules and shall provide the Engineer with a written report of the drainage rate test results indicating test locations and corresponding drainage

rates. The approval of water harvesting basin construction and drainage testing activities shall be obtained prior to the construction of the water harvesting basins. If any drainage test area has not fully drained after the second filling within one- hour, the Engineer may recommend relocating or removing the non-performing water harvesting basin.

All testing and water required for drainage tests shall be considered as part of this item. Excavation and grading of water harvesting basins shall not be done when, in the opinion of the Engineer, the moisture content of the soil is excessive with respect to accepted horticulture practice.

Water harvesting basins shall be complete and approved by the Engineer prior to excavating Planting Pits.

Method of Measurement:

Miscellaneous Work (Water Harvesting Basins) will be measured by the square yard of the basin constructed at all locations shown on project plans and as specified herein.

Basis of Payment:

Miscellaneous Work (Water Harvesting Basins) measured as above will be paid for at the contract unit price per square yard, which price shall be in full compensation for the work, complete in place including excavation, backfill, staking, grading, drainage tests, and other miscellaneous items required to construct water harvesting basins as shown on plans and specified herein.

- ITEM 9240181 MISCELLANEOUS WORK (CONTROL OF NOXIOUS PLANTS)
(MANUAL METHODS):**
- ITEM 9240182 MISCELLANEOUS WORK (CONTROL OF NOXIOUS PLANTS)
(HERBICIDE):**

Description:

The work under these items shall consist of controlling noxious and invasive plant species, manually or with the application of herbicides, in the areas designated by the Engineer, and throughout the duration of the contract, as required in a Noxious Species Control Plan (NSCP) prepared by the contractor as specified herein. When noxious or invasive plant species are determined to be present within the project limits or all anticipated construction zones, the control procedures in the NSCP shall be implemented prior to earthmoving activities or in advance of seeding of infested areas during all stages of construction.

For projects that include landscape establishment, as specified in Section 807 of the Standard Specifications, control of noxious and invasive plant species will also be required throughout the landscape establishment phase, and shall be included in the contractor's NSCP.

The control of plant species not on the State or Federal Noxious or Invasive lists noted below will be paid only when control is directed by the Engineer based on the original or amended NSCP approved by the Engineer.

Materials:

General

The types of herbicide to be used and the methods of application shall conform to Environmental Protection Agency (EPA) requirements and the product's label instructions, and shall be as approved by the Engineer. When applicable, the contractor shall file a Notice of Intent and Notice of Termination Arizona Department of Environmental Quality (ADEQ) for compliance with the National Pollutant Discharge Elimination System (NPDES) and/or Arizona Pollutant Discharge Elimination System (AZPDES) Pesticide General Permit.

All materials to be used shall be listed and protocol information provided in the Noxious Species Control Plan, as specified below. The contractor shall provide the container with the original chemical label for inspection and confirmation of the chemicals used. All containers shall be disposed of as recommended by the manufacturer.

Herbicides proposed in the plan for use on projects adjacent to BLM and/or USFS Lands shall be in conformance with the following current environmental documents including: "Final Vegetation Treatments Using Herbicides Programmatic Environmental impact Statement for BLM" available electronically at:

http://www.blm.gov/wo/st/en/prog/more/veg_eis.html

or the "Environmental Assessment for Management of Noxious Weeds and Hazardous Vegetation on Public Roads on National Forest System Lands in Arizona", which is available at: <http://www.fs.fed.us/r3/projects/ro/ea-noxiousweeds/ea-noxious-weeds.pdf>.

The Environmental Documents include list of approved Herbicides, Mitigations and Best Management Practices which as appropriate should be included by the contractor in the submitted NSCP.

All materials used shall also be in accordance with the approved NSCP and Pesticide Use Proposal (PUP).

Construction Requirements:

The contractor shall develop a Noxious Species Control Plan (NSCP) for state and federal listed noxious and invasive plant species, and other undesirable plant species shown on the Roadside Development web site for approval by Roadside Development through the Engineer. Four copies of the proposed Noxious Species Control Plan in standard 3 ring binders shall be submitted to the Engineer at the pre-construction conference. The proposed NSCP shall include the as minimum following information applicable to the project area, location and conditions listed below:

- (1) A list of Noxious and Invasive Species and other Roadside Development approved plants species that would be anticipated for control based on existing vegetation and the project biotic communities.
- (2) The methods of control of noxious and invasive plant species shall be determined based on the species presented within the project limits prior to earthmoving activities as well as subsequent project construction phases before seeding. Pre-emergent herbicide shall NOT be applied for all project seeding areas.
- (3) The proposed method(s) of control, either manual eradication or herbicide application, to be used for each anticipated plant species at each of stage of plant development.
- (4) The herbicides, method and frequency of application, and rates to be used for each listed plant species.
- (5) Copies of herbicide and surfactant labels and Material Safety Data Sheets (MSDS) for all chemicals proposed for use.
- (6) Procedure for collection, removal and disposal of noxious and invasive plants.
- (7) Methods and procedures to be followed to protect existing, transplanted, and new emerging vegetation in seeded areas.
- (8) Responsible Applicator and required Structural Pest Control Applicator Licensing information, as specified in Section 806.
- (9) Record procedures to be followed for control work completed.
- (10) Record procedures to be followed for reporting all chemicals used annually within the project right of way adjacent to BLM or USFS Lands within a calendar year to ADOT, Roadside Development.
- (11) Projects on right of way adjacent to BLM Lands shall include a completed Pesticide Use Proposal (PUP) form for all proposed herbicide uses prepared for submittal to BLM for approval.
- (12) Projects on right of way adjacent to USFS Lands shall include the USFS, ADOT approved PUP.
- (13) When applicable, other information and explanations required in the PUP or to implement the NSCP.
- (14) Process to be used for amending the NSCP to add additional plants or treatments that may be required as the project progresses.

- (15) A copy of the original Special Provisions for Control of Noxious Plants that the contractor bid shall be attached to the NSCP.

The NSCP submitted to the Engineer shall not be implemented until it is approved by Roadside development and the contractor is so directed by the Engineer.

The contractor shall keep a copy of the approved NSCP and furnish to the Engineer a copy of the approved NSCP for record keeping. The NSCP copy of the contractor and Engineer shall be maintained up-to-date with the contractor providing submittals of completed work activities within 5 working days following completion of the work for each area directed by the Engineer for control. The NSCP shall be maintained up-to-date with submittals of the above completed NSCP information for the duration of the project.

The Engineer will designate the location of the areas to be treated, and when required the frequency of treatment as per the NSCP. Payment will be made for the initial treatment of each area, whether with manual methods or using herbicides, and for each subsequent treatment ordered and approved by the Engineer.

The contractor shall begin control of the designated areas within five working days of the Engineer's notice, and complete the treatment within ten working days of the notice unless otherwise approved by the Engineer.

If other plant species listed in the Arizona Noxious Weed List or the Federal Noxious Weed List or the Arizona Invasive Non-Native Plants' Categorized List <http://www.swvma.org/InvasiveNon-NativePlantsThatThreatenWildlandsInArizona.pdf> occur within the project area that are not included in the NSCP, the contractor shall modify the Noxious Species Control Plan to add such species, including acceptable control measures and where applicable a PUP, and submit this information as an amendment of the NSCP to the Engineer and Roadside Development for acceptance.

ADOT Invasive and Noxious Plant Species Lists are available electronically at the following Roadside Development web address:

http://www.azdot.gov/Highways/Roadway_Engineering/Roadside_Development/Resources.asp

The project areas will be surveyed by the Engineer prior to earthmoving activities and following rainfall events and during plant germination and growth periods for listed noxious and invasive plant species. When surveys determine that noxious, invasive or other designated plants species listed in the NSCP for control are found to be present within the project right-of-way, the contractor shall treat the areas designated by the Engineer in accordance with the approved NSCP. Such treatments shall be completed and approved by the Engineer before ground disturbing or earthmoving activities occur from those areas.

The contractor shall mark those areas receiving manual control with an application of a photosensitive dye. Areas receiving herbicide control shall have them applied with a photosensitive dye which will produce a contrasting color when sprayed upon the ground. The color shall disappear between three and five days after being applied. The dye shall not

stain any surfaces nor injure plant or animal life when applied at the manufacturer's recommended application rate.

Application of herbicide shall be in accordance with the manufacturer's instructions and the approved NSCP.

For projects on right of way within BLM jurisdiction, PUPs shall be prepared and submitted to the Engineer and Roadside Development as required in the NSCP. The PUPs will be submitted by the Department to BLM and must be approved by the BLM before being approved by the Engineer.

For projects on right-of-way within Forest Service jurisdiction, application of the herbicide shall be in accordance with the USFS, ADOT approved PUPs for the chemicals to be used.

The contractor shall keep records of all herbicide applications. A copy of this record shall be added to the NSCP and also submitted to the Engineer after each application. The contractor shall be responsible for the proper transport, storage, and application of all materials necessary for herbicide control treatments.

Method of Measurement:

Control of noxious and invasive plant species, either manually or with herbicides, will be measured by the square yard (SQ.YD.) of each treated area, as directed and approved by the Engineer.

Basis of Payment:

The accepted quantities of control of noxious and invasive plant species, either manually or with herbicides, measured as provided above, will be paid for at the contract unit price for each soil treatment directed and approved by the Engineer. Such price will be considered to include all labor, materials, equipment, and mobilization costs required to complete the work as specified herein.

No measurement or payment will be made for treatment of those areas, manually or with herbicides, not authorized and approved by the Engineer. No measurement or payment will be made for the removal and proper disposal of waste materials, the cost being considered as included in contract items.

No measurement or payment will be made for preparation of the NSCP and, when applicable, the PUP, including the initial submittal and modifications, or for monitoring, the costs being considered as included in contract items.

No separate measurement or direct payment will be made for Control of Noxious Plants under Landscape Establishment as specified in Section 807 of the Standard Specifications and these Special Provisions; the cost being considered is included in the respective contract item of Landscape Establishment.

(925SRVY, 02/20/08)

SECTION 925 - CONSTRUCTION SURVEYING AND LAYOUT:

925-5 **Basis of Payment:** the first two sentences of the second paragraph of the Standard Specifications are revised to read:

If additional staking and layout are required as a result of additional work ordered by the Engineer, such work will be paid under Item 9250101 - ONE-Person Survey Party at the predetermined rate of \$65 per hour, Item 9250102 - Two-Person Survey Party at the predetermined rate of \$100 per hour, Item 9250103 - Three-Person Survey Party at the predetermined rate of \$135 per hour, Item 9250106 – SURVEY MANAGER at the predetermined rate of \$100 per hour, and Item 9250105 - Office Survey Technician at the predetermined rate of \$70 per hour.

(1001MATL, 12/14/09)

SECTION 1001 MATERIAL SOURCES: of the Standard Specifications is revised to read:

1001-1 **Description:**

The work under this section shall consist of the procuring of borrow, topsoil, subbase and base materials, mineral aggregates for concrete structures, surfacing, and landscape plating, from sources either designated on the project plans or in the Special Provisions or from other sources.

1001-2 **General:**

The contractor shall determine for itself the type of equipment and work required to produce a material meeting the specifications.

Sites from which material has been removed shall, upon completion of the work, be left in a neat and presentable condition. Where practicable, borrow pits, gravel pits, and quarry sites shall be located so that they will not be visible from the highway.

The contractor shall provide an Environmental Analysis, as specified in Subsection 104.12, for any source proposed for use regardless of whether an approved Environmental Analysis exists for the site.

In accordance with Subsection 104.12, the contractor may incorporate an existing Environmental Analysis approved after January 1, 1999, provided that the analysis is updated as necessary to be in compliance with current regulations and with the contractor's planned activities.

It shall be the responsibility of the contractor to conduct any necessary investigations, explorations, and research, on-site and otherwise, before and after submitting the bid

proposal, to satisfy itself that the specified quantity and/or quality of material exists in any proposed material source.

The Department makes no representation regarding quality or quantity of materials in any source.

1001-2.01 Material Sources in Flood Plains:

Any material source located in a flood plain and proposed for use on the project shall be reviewed by the appropriate agency having flood plain management jurisdiction for the area in which the proposed source is located. The contractor shall obtain a letter from the governing flood plain agency addressed to the Engineer, certifying that the location of the proposed source conforms to the requirements of the floodplain management agency.

Contractors seeking a flood plain material source are cautioned that Section 404 of the Clean Water Act may prevent use of the source unless an appropriate permit is first obtained from the U.S. Army Corps of Engineers.

Except for surplus material from agency-administered flood control management projects, borrow material shall not be obtained from any area situated in the 100-year flood plain of any stream or watercourse, and located within one mile upstream and two miles downstream of any highway structure or surfaced roadway crossing. Surplus material from agency-administered flood control management projects may be used as borrow material only if the contractor submits written evidence to the Engineer that the flood control agency project was fully designed and funded prior to the date of advertisement for bids on the Department project.

Material sources in flood plains located on Native American Indian Reservations will be considered for use based on an individual analysis. The analysis shall include a review of applicable land use plans, flood plain management plans, environmental plans, applicable laws and regulations pertaining to Indian Reservations, and an engineering analysis of the effects on any highway facility or structure. The contractor shall obtain from the Native American Tribal Council all permits, licenses, and approvals and present to the Department for review. The Department will review each request on a case by case basis.

1001-2.02 Information Available:

The Department's Materials Group maintains a listing of materials sources for which a completed Environmental Analysis is available and the landowner has allowed the source to be placed on the list. In addition, Materials Group maintains files for those sites for which the Department holds an easement, license, permit, lease, or other right, as well as a General Plan of Operation and Restoration. The contractor may contact the Materials Group at (602) 712-7231 for information and may review the files located at 1221 N. 21st Avenue, Phoenix, Arizona 85009-3740.

Contractors are advised that an agency having jurisdiction over the source, such as the Forest Service, Bureau of Land Management, Bureau of Reclamation, the State Land Department, etc., or the owner, as a condition to the use of the source, may have imposed

certain obligations. The contractor who uses such a source shall assume full contractual responsibility for any and all of these obligations imposed either by the agency having jurisdiction or by the owner. Contractors considering such a source shall make themselves fully aware of any and all requirements imposed by the Department and the landowners.

The contractor may propose the use of these or other sources, provided that all requirements of the specifications have been met.

It shall be the responsibility of the contractor to comply with the provisions of the Environmental Analysis and with current laws, rules, and regulations.

The Department makes no representation regarding quality or quantity of materials in any source.

It shall be the responsibility of the contractor to conduct any necessary investigations, explorations and research, on-site and otherwise, to satisfy itself that the specified quantity and/or quality of material exists in any material source.

1001-2.03 Usage of Materials:

Approval of the use of any source shall be limited to the specific contract and purpose for which the use of the source was obtained.

1001-2.04 Royalty Charges:

If the Engineer approves a source for which the Department holds an easement, license, permit, lease, or other right with the landowner or controlling agency that includes requirements for the payment of royalties, the amount of the royalty charges and the name and address of the party to whom royalties are to be paid will be available from the Materials Group, 1221 N. 21st Avenue, Phoenix, Arizona 85009-3740.

Prior to the time of final payment, the contractor shall furnish the Engineer with evidence that all royalty charges have been paid. Such evidence shall consist of a waiver, release, or other written acknowledgement from the owner that all of the contractor's obligations to the owner have been met. In the event that royalty charges have not been paid, the Department reserves the right to make such payment and to deduct the amount of such payment from monies due the contractor.

The final billing and payment for material extracted from sources under the jurisdiction of the State Land Department will include a small administrative charge based on the total amount of royalties due for materials removed.

Upon receipt of the final billing from the Department of Transportation, the contractor shall mail a check, payable to the State Land Department, addressed as follows:

Arizona Department of Transportation
Field Reports Section
206 South 17th Avenue
Phoenix, Arizona 85007

1001-2.05 Performance Bonds:

If sources are under the jurisdiction of either the State Land Department or the Bureau of Land Management, the contractor shall secure a performance bond. A fully executed copy of the bond shall be furnished to the Engineer along with evidence that a fully executed copy has been sent to the State Land Department or the Bureau of Land Management.

The form of the Performance Bond will be available from the Materials Group, 1221 N. 21st Avenue, Phoenix, Arizona 85009-3740. For pits under the jurisdiction of the Bureau of Land Management, the surety shall be a company listed under "Surety Companies Acceptable on Federal Bonds." This list is published annually as of July 1 in the Federal Register.

Performance bonds shall be conditioned upon the compliance with the requirements of the State Land Department and the Bureau of Land Management and the requirements of the specifications for the clearing of pit sites, the removal of material and the cleaning up of pit sites.

Copies of fully executed performance bonds shall be mailed as follows:

State Land Commission
State Land Department
1624 West Adams Street
Phoenix, Arizona 85007

Bureau of Land Management
Manager, Land Office
222 North Central Avenue
Phoenix, Arizona 85004

1001-2.06 Sampling and Testing:

The results of any sampling and testing accomplished by the Department will be available from the Materials Group, 1221 N. 21st Avenue, Phoenix, Arizona 85009-3740.

1001- 2.07 Plan of Operation and Restoration:

The contractor shall determine whether the Department holds an easement, license, permit, lease or other right, for any proposed material source. For such sites, a project-specific Plan of Operation and Restoration will be required. The contractor shall obtain a copy of the related document and the Department's General Plan of Operation and Restoration for the proposed site from the Materials Group. The contractor shall prepare and submit to the Engineer a project-specific Plan of Operation and Restoration which shall follow the format of the Department's General Plan of Operation and Restoration, and shall take into account the requirements of the Environmental Analysis, as well as any restrictions placed on the use of the source by the landowner or agency.

The proposed source will not be approved without an approved project-specific Plan of Operation and Restoration. Approval of the contractor's project-specific plan does not constitute approval of the use of the source.

The contractor shall identify and provide a person in charge of the operation. That person shall maintain copies onsite of the Department's General Plan of Operation and Restoration, the contractor's approved project-specific Plan of Operation and Restoration, the current Environmental Analysis, and the license and permits issued to the Department by the landowner or agency.

1001-3 Proposed Source:

1001-3.01 Approval Requirements:

(A) General:

The contractor shall promptly advise the Engineer as to the source that it proposes to use.

The contractor acknowledges that all the conditions set forth in this subsection shall be met prior to the source being approved for use.

Other than sampling and testing, the requirements of this subsection shall be completed prior to initiation of any activities that disturb the existing conditions at the proposed source.

The contractor further acknowledges that no additional compensation will be made on account of any delays in preparing or modifying the Environmental Analysis, obtaining approval for the use of a source, or the failure to obtain approval of a source. An extension of contract time may be granted only in accordance with Subsections 104.12 or 1001-3.01(B)(4).

Regulatory changes, specification changes, or other reasons may preclude the approval of a materials source. The contractor acknowledges that the Department may refuse to approve a material source even if the Department had approved the source for other projects.

If all of the requirements for approval of a materials source have been accomplished for the project, and the Engineer has approved the source for use on the project and, subsequent to that approval, the Environmental Analysis is rescinded, the contractor may request a revision to the contract in accordance with Subsection 104.02 and 108.08. In reviewing the contractor's request, the Department will take into account the following factors. Additional factors may be considered.

- (1) Whether the contractor was in compliance with the requirements of the Environmental Analysis and, if applicable, the site-specific Plan of Operations and Restoration.
- (2) Whether the reasons for rescinding the approval were reasonably foreseeable.

- (3) Whether the action taken was the result of regulatory changes.
- (4) Whether deficiencies unrelated to the Environmental Analysis may have rendered the source unacceptable.
- (5) Whether rescinding the approval was the sole cause of any impact to controlling activities on the project.

(B) Specific Conditions For Approval:

The use of a source will require written approval by the Engineer. No approval will be given until the contractor has complied with the following conditions:

- (1) The contractor has submitted an Environmental Analysis, as specified in Subsection 104.12, of the source proposed for use and the Department has reviewed the analysis and satisfied itself that the use of such source will not have an adverse social, economic or environmental impact. The requirements of Subsection 1001-3.01 shall be completed prior to initiation of any activities that disturb the existing conditions at the proposed source, except for exploring test areas as specified in Subsection 1001-3.02.
- (2) The contractor has furnished the Engineer with evidence that he has secured the rights to the source, including ingress and egress.
- (3) The Department has determined that the material from the proposed source not only meets the requirements, but is also compatible with the established project design criteria developed by the ADOT Materials Group and based on the soil support value of the embankment; and the sampling and testing as herein specified has been satisfactorily completed.
- (4) The contractor has furnished a fully executed copy of the Performance Bond as specified in Subsection 1001-2.05.
- (5) When required, the contractor has submitted, and the Department has approved, the site-specific plan of operations and restoration as specified in Subsection 1001-2.07.

The contractor shall also notify the Arizona Department of Agriculture, in accordance with the Arizona Native Plant Law, at least 30 days prior to any clearing operations of less than 40 acres on private land, 60 days prior to clearing operations of 40 or more acres on private land, and 60 days prior to any clearing of state land, regardless of size. If the Engineer is convinced that the contractor has made every effort to comply with the provisions of the Arizona Native Plant Law in contacting the Department of Agriculture, the Engineer will increase the number of contract days by the amount of time required for action by the Department of Agriculture. The increase will not exceed 45 calendar days and will be concurrent with any increase allowed for the preparation of the Environmental Analysis.

(C) Historical and Cultural Resources:

If the Department determines that the proposed use will have major adverse impact on cultural or historic resources, the Department will not allow the use of the source.

(D) Permit from Navajo Nation:

For projects located on the Navajo Reservation, the Navajo Nation has adopted a permitting system for any sources, regardless of whether on or off the Navajo reservation, which are to supply material for projects located within its boundaries. No material source will be approved until the contractor submits a copy of the permit from the Navajo Nation allowing materials from the proposed source to be used on the project. For information concerning the permit, the contractor shall contact the Navajo Nation Historic Preservation Office.

1001-3.02 Testing Requirements:

The contractor shall furnish equipment and personnel and shall obtain representative samples of the material under the supervision of the Engineer. At the option of the contractor, the material shall be tested by either the Department or by a testing laboratory approved by the Department. The cost of all sampling and testing done for the purpose of attaining approval of any source, including the cost of supervision by the Engineer, shall be borne by the contractor.

If testing is performed by a testing laboratory, the contractor shall arrange for the samples to be delivered to the testing laboratory. Tests shall be performed using appropriate test procedures referred to in the sections of the specifications in which the specific material requirements are described.

The contractor shall make the arrangements necessary to see that the testing laboratory submits the results of the tests to ADOT Materials Group. The contractor shall submit to ADOT Materials Group sufficient quantity of material from the samples taken so that ADOT Materials Group may test the materials, at the Department's expense, and verify the results.

Exploratory sampling and testing activities conducted prior to the Department's approval shall be limited so as to cause the minimum amount of vegetation removal and surface disturbance required to obtain representative samples. The contractor shall not produce material, mobilize crushing equipment or clear a worksite prior to approval of the Environmental Analysis.

The contractor may request an exemption from the testing requirements specified in this subsection upon presentation of evidence to the satisfaction of the Engineer that the material that will be produced on the project is sufficiently similar to material that has been previously acceptable to the Department on projects with similar materials specifications.

No approval of the source shall be assumed, nor will it be made, until the Department has determined that the material meets the specified requirements.

The contract time will not be adjusted because of any time required by either the contractor or the Department to sample and test the material and to determine the quality of the material.

1001-4 Special Access:

The contractor may make a request to the Engineer to approve special access to a controlled access highway if special access is not shown on the project plans.

The request by the contractor shall be accompanied by an Environmental Analysis and by documents which specify the point(s) of access, the acquisition of right-of-way, the manner in which access will be attained, the traffic control plan, and crossovers, along with all other appropriate data which will allow the Engineer to evaluate its request. If the request is approved, a supplemental agreement shall be entered into.

All costs associated with the special access requested by the contractor shall be borne by the contractor, including, but not limited to, cattle guards, fences, gates and restoration work.

When access is not being utilized, gates shall be closed and locked. Upon completion of all operations, the area within the right-of-way that has been disturbed shall be restored to the condition existing prior to the contractor's operations.

The decision by the Engineer to deny a request by the contractor will be considered to be final.

1001-5 Operations at Source:

1001-5.01 General Requirements:

The contractor shall conduct its operations in such a manner as to preserve available materials in excess of project requirements.

The contractor shall notify the Engineer in advance of operations at the source. Notice shall be given before and after clearing and grubbing, and before and after cleaning up.

1001-5.02 Clearing and Grubbing:

Before beginning stripping, the contractor shall clear and grub the source as necessary to prevent the contamination of materials to be used in the work. Clearing and grubbing shall be in accordance with the requirements of Section 201, except that the resulting surface need not be leveled and vegetable matter need not be separated from any overburden which the Engineer determines to be unsuitable for any future use and which is to be wasted. Clearing and grubbing shall be limited to the area expected to be excavated and areas used for processing and stockpiling.

In the disposal of all tree trunks, stumps, brush, limbs, roots, vegetation and other debris removed, the contractor shall comply with the requirements of the Arizona Revised Statutes

Title 49 Chapter 3 – Air Quality; and with the Arizona Administrative Code Title 18 Chapter 2 – Department of Environmental Quality – Air Pollution Control.

Burning will be permitted only after the contractor has obtained a permit from the Arizona Department of Environmental Quality, and from any other Federal, State, County or City Agency that may be involved.

When stripping is required, overburden shall be removed to the extent necessary to remove all undesirable materials and shall, at all times, be kept stripped at least five feet beyond the working face of the area being excavated.

The contractor shall comply with the requirements of the landowner or agency having jurisdiction over the land.

1001-5.03 Extraction of Materials:

Materials shall be removed from the source in a workmanlike manner and, when required, in accordance with the contractor's project-specific Plan of Operation and Restoration. In order to produce acceptable material in the amount and gradation required, it may be necessary for the contractor to do any or all of the following, along with any other similar operations usually associated with the extraction, processing and production of the particular material being produced:

- Move materials from one area to another.
- Perform additional screening.
- Remove, wash and waste material.
- Blend materials.
- Revise crushing methods.
- Remove deleterious materials such as clay balls, roots and sticks.

If the Engineer determines that the material in a source is stratified, all material except borrow shall be removed for the full depth in such a manner as to produce a uniform blend of the material. Placing the material from different areas and depths into a surge pile and removing material from the surge pile by cutting through the pile will be acceptable provided that a uniformly blended material is obtained.

Material sources located in drainage channels such as washes, riverbeds, etc., may experience seasonal variations in the depth of ground water. In order to produce the quantity of material estimated to be available, the contractor may be required to work below the water table.

1001-6 Fences and Cattle Guards:

Where the haul roads to material sources cross existing fence lines in areas where there is livestock of any kind, temporary cattle guards shall be installed by the contractor at each crossing.

The livestock operator or owner shall be contacted prior to the beginning of any operations and effective measures shall be taken and means provided by the contractor to prevent livestock from straying.

In operations where conditions will exist that are dangerous to livestock of any kind, temporary cattle guards and fence shall be installed around the pit area by the contractor to protect livestock.

Temporary cattle guards and fence installed by the contractor shall be removed and existing fence disturbed shall be replaced or reconstructed and all fence shall be left in as good condition as it was prior to the beginning of work.

1001-7 Cleaning Up:

All overburden and other undesirable materials removed and all piles of waste materials resulting from operations in the source shall be handled in accordance with the requirements of the landowner or agency having jurisdiction over the land, the Environmental Analysis, the project-specific Plan of Operation and Restoration, if applicable, and all laws, rules and regulations. All debris shall be removed and disposed of and, if directed, all open test holes shall be filled. Unless otherwise required, the sides of sources shall be sloped and smoothed so that livestock can enter and leave the excavated area safely. Unless otherwise required, all haul roads shall be obliterated and, as far as practicable, the ground left in as good condition as it was prior to hauling.

1001-8 Method of Measurement and Basis of Payment:

Except as may be otherwise specifically provided for in this section or elsewhere, no measurement or direct payment will be made for any costs involved in the procuring of materials. Such costs shall be considered as included in the cost of contract items.

(1002PNT, 11/06/12)

SECTION 1002 PAINT: of the Standard Specifications is revised to read:

1002-1 General Requirements:

All paints specified herein shall be ready-mixed at the manufacturer's plant, except for inorganic zinc-rich primer, which shall be mixed by the fabricator or at the project site just prior to application. All paints shall be standard paint products of the manufacturer with published product data sheets and shall comply in all details with the specifications.

Ready-mixed paint shall be homogeneous, free of contaminants, and shall be of a consistency suitable for the use for which it is specified. The pigment shall be finely ground and properly dispersed in the vehicle, according to the requirements for the type of paint, and this dispersion shall be such that the pigment does not settle appreciably, does not cake or thicken in the paint container, and does not become granular, jelled, or curdled. Any settlement of pigment in the paint shall be easily dispersed with a paddle so as to

produce a smooth uniform paint of the proper consistency. The manufacturer shall include in the paint the necessary additives for control of sagging, leveling, drying, drier absorption, and skinning.

Lead, lead compounds, soluble barium compounds, or hexavalent chromium compounds shall not be used as raw materials in the paint formulas specified under this section, and shall not be added to any paint formulas specified under this section.

The use of halogenated solvents is not permitted.

Paint shall be furnished in new, unopened air-tight containers, which are clearly labeled with the exact title of the paint, Federal Specification number when applicable, name and address of the manufacturer, product code, date of paint manufacture, and the lot or batch number. The containers shall meet U.S. Department of Transportation Hazardous Materials Shipping Regulations. Precautions concerning the handling and the application of the paint shall be shown on the label of the paint containers.

All of the paints of any coating system consisting of individual paints (such as a primer, intermediate coat, and topcoat), shall be made by the same manufacturer, and shall be designed and sold to be used together as a system.

Only paints and paint systems approved in accordance with Subsection 1002-3 and shown on the Department's Approved Products List (APL) will be allowed for use. Copies of the most current version of the APL are available on the internet from the ADOT Research Center, through its Product Evaluation Program. Paint supplied by an approved manufacturer with a different product code from that which was previously evaluated and approved will require evaluation to determine if it is acceptable.

The contractor shall submit to the Engineer a Certificate of Compliance for each lot or batch of paint supplied, in accordance with Subsection 106.05, prior to its use. Product data sheets listing the paint constituents and their proportions as well as Materials Safety Data Sheets (MSDS) are required for each paint material supplied prior to its use.

All applicable governmental environmental regulations shall be adhered to during cleanup and for the disposal of unused paint.

1002-2 Paint Types:

1002-2.01 Three-Paint Coating System:

(A) General:

A three-paint coating system shall be for use on metallic surfaces, and shall include a primer (Paint Number 1), intermediate coat (Paint Number 2), and topcoat (Paint Number 3) from the same system. All three paints shall be water-based, 100 percent acrylic (acrylic latex) paints, unless a non water-based primer is specified, in which case, the topcoat and intermediate coat must be a water-based acrylic paint.

Each individual paint shall conform to all of the chemical and physical characteristics and properties as declared on the manufacturer's product data sheet. In addition, the paint color shall be as specified in the project plans, and the consistency shall be in accordance with the manufacturer's recommendations. The contractor shall use the checking and calibration procedures found in ASTM D 4212 and verify the paint consistency with the Engineer prior to each application.

Each coating is intended for spray application. Limited application can be made by brushing or rolling if approved by the Engineer.

(B) Paint Number 1 - Primer:

This paint shall be used on blast cleaned steel surfaces for the first coat of a three-paint coating which must include Paint Number 2 and Paint Number 3 from the same system.

(C) Paint Number 2 - Intermediate Coat:

This paint for intermediate coats shall be used on primed steel surfaces as the second coat of a three-paint coating system which must include Paint Number 1 and Paint Number 3 from the same system. The paint shall be appropriately tinted to contrast with the prime coat.

(D) Paint Number 3 - Topcoat:

Paint for topcoats shall be used as the third coat of a three-paint coating system which must include Paint Number 1 and Paint Number 2 from the same system.

For topcoats, the gloss shall be as specified on the project plans. The available colors for topcoats shall provide visual matches to the colors given in the Federal Standard No. 595. The colors shall be available in high-gloss enamels, if required.

1002-2.02 Zinc-Rich Primer:

Zinc-rich primer shall be a solvent based, one-part, epoxy ester, zinc-rich coating made to contain no less than 89 percent by weight of zinc dust in the dried film. Zinc-rich primer is suitable for limited use on cuts, welds, or damaged galvanized surfaces, as needed to restore the continuity of cathodic protection. Zinc-rich primer shall be certified by the manufacturer to be compatible with any suitable water-based acrylic finish paint.

Zinc-rich primer shall be used where zinc paint is called for elsewhere in the specifications.

1002-2.03 Inorganic Zinc-Rich Primer:

Inorganic zinc-rich primer shall be a solvent-based three-component, inorganic, ethyl silicate, zinc-rich coating for use on steel surfaces which will be exposed to severely corrosive environments. The primer shall be mixed in accordance with the manufacturer's directions by the fabricator or at the project site just prior to application. Inorganic zinc-rich primer shall be made to contain no less than 80 percent by weight of zinc dust in the dried

film, and shall be certified by the manufacturer to form a strong bond to properly cleaned and prepared steel surfaces, either sandblasted or galvanized. This primer shall also be certified by the manufacturer to be compatible with any suitable water-based acrylic finish paint.

1002-2.04 Alkyd Primer:

Alkyd primer shall be solvent-based, and shall be designed for ferrous metal surfaces where there are rusting issues which rule out the use of a water-based primer. Such surfaces may include ornamental iron, tanks, fabricated parts, handrails, and objects referred to as "black steel." Alkyd primer shall be certified by the manufacturer to be compatible with any suitable water-based acrylic finish paint.

1002-2.05 Direct-to-Metal (DTM) Combination Primer and Finish Paint:

This paint shall be a water-based acrylic paint specially designed for use as a direct-to-metal (DTM) primer or combination primer and finish. The product shall be certified by the manufacturer to form a strong bond to properly cleaned and prepared surfaces of structural steel and other metallic products such as metal buildings, tanks, and pipes. It shall also be certified to bond with other properly cleaned and prepared surfaces such as galvanized steel, oil-based paints, and alkyd enamels. When used on ferrous metal surfaces where there are rusting issues, the paint shall be rust-inhibitive. Direct-to-metal combination primer and finish paints shall be designed to be usable as a complete two or three coat system. When used as a primer only, the paint shall be certified by the manufacturer to be compatible with any suitable water-based acrylic finish paint.

1002-2.06 Acrylic Emulsion Paint:

Acrylic emulsion paint shall be used on concrete and masonry surfaces, and shall be a water-based, 100 percent acrylic (acrylic latex) paint.

This paint may be tinted by using "Universal" or "all purpose" concentrates.

The color of the final coat of paint shall be as indicated on the project plans. If no color is specified on the plans, the paint color shall approximate that of paint color chip No. 30318, as specified by Federal Test Standard Number 595, when applied to either a concrete test specimen measuring two feet by two feet, or to the surface of the concrete structure to be painted.

The Engineer will determine color acceptance by visual inspection.

1002-3 Sampling and Testing:

(A) General:

Any lot or batch of paint may, at any time, be sampled and tested for conformance to the specifications and the chemical and physical characteristics and properties as declared by the manufacturer on the product data sheets submitted with the original samples used in the

evaluation and approval of the product. Also, complete coating system samples may be required at any time for follow-up evaluation using the performance test method employed in the original evaluation for approval of the system.

(B) Coating Systems for Structural Steel and Other Metallic Surfaces:

Coating systems composed of the paints specified in Subsections 1002-2.01 through 1002-2.05 will be tested as complete systems applied to steel panels and weathered in accordance with ASTM G 154, and exposure cycle number 4 of ASTM D 4587, in the Q-U-V Accelerated Weathering Tester, utilizing UVB 313 lamps. Each system shall have an evaluation rating of 100 or greater after 2000 hours of weathering. The procedure is as follows:

1. Paint coatings will be applied to cold rolled steel panels (ASTM D 609, Type 3, ASTM A 366). The paint will be thinned to 75 ± 2 Ku consistency using demineralized water. Three coats, each approximately 2 mils thickness are applied to each of four panels according to ASTM D 823. The fourth coated panel from each set will be inscribed with an "X" cut to the steel substrate and extending across the entire coated area.
2. The exposure cycle used with the weathering tester shall be D = 8 h UV/60 degree C followed by 4 h CON/45 degree C. One panel from each set of four shall be removed at 1000 hours and another at 1500 hours. The last two panels shall be removed at 2000 hours.
3. Paint systems will be evaluated on the basis of six measures of degradation which may be found to occur under the conditions of exposure. For each measure, a rating scale of from one to five points will be applied. A rating of one point indicates the poorest performance and five points indicate the best performance. The rating from each measure is multiplied by a weighting factor which represents the relative importance of that measure. The product is a score for that measure. The sum of the scores for all measures is the overall score for the system. To be acceptable, paint systems shall have an overall score of 100 or higher.
 - A) Cracking/Flaking: ASTM D 660, ASTM D 661, and ASTM D 772 are used in combination to determine the rating scale. A weighting factor of three will be applied to the results of these tests.
 - B) Blistering/Flaking: ASTM D 714 and ASTM D 772 are used in combination to determine the rating scale. A weighting factor of three will be applied to the results of these tests.
 - C) Corrosion: A rating scale is derived from ASTM D 610 for evaluating the degree of rusting. A weighting factor of three will be applied to the results of this test.

- D) Chalking/Erosion: ASTM D 4214 and ASTM D 662 are used in combination to determine the rating scale. A weighting factor of three will be applied to the results of these tests.
- E) Adhesion: The tape test is based on ASTM D 3359 and the rating scale is from the Classification of Adhesion Test Results under Test Method B. A weighting factor of five will be applied to the results of this test.
- F) Flexibility: ASTM D 522, using a 1-1/4 inch mandrel, is employed to determine flexibility. The degree of cracking observed after bending is used to determine the rating scale. A weighting factor of five will be applied to the results of this test.

(C) Paint for Concrete and Masonry Surfaces:

Paint for concrete and masonry surfaces will be tested in accordance with the following procedures:

1) Resistance to Accelerated Weathering:

The paint will be applied to concrete mortar panels and weathered in a Q-U-V accelerated weathering tester, according to ASTM G 154, for 2000 hours utilizing UVB-313 lamps, and exposure cycle number 4 of ASTM D 4587. The paint weathered in this manner shall show no appreciable change in color or appearance due to fading, chalking, or material reaction.

2) Adhesion:

The paint shall be applied to a concrete or masonry test surface approved by the Engineer, in accordance with the application plan specified in Subsection 610-3.03. After a minimum period of 30 days of outdoor exposure, the adhesion of the paint will be measured. Testing will be performed in accordance with the requirements of ASTM D 4541, Method E, with a strength of at least 100 psi being required. In addition, testing will also be performed in accordance with the requirements of ASTM D 3359, Method A, with a rating of 3A or higher being required.

(1003REBAR, 01/26/16)

SECTION 1003 REINFORCING STEEL:

1003-1 General Requirements: the first paragraph of the Standard Specifications is revised to read:

Reinforcing steel shall be furnished in the sizes, shapes, and lengths shown on the plans and in conformance with the requirements of the specifications.

Certificates of Compliance conforming to the requirements of Subsection 106.05 shall be submitted for epoxy coated reinforcing bars, as well as uncoated reinforcing bars, wire, and welded wire fabric. In addition, for epoxy coated reinforcing bars, Certificates of Compliance

shall be required from the coating manufacturer and Certificates of Analysis shall be required from the coating applicator.

1003-2 Reinforcing Bars: the first paragraph of the Standard Specifications is revised to read:

Except when used for wire ties or spirals, steel bars used as reinforcement in concrete shall be deformed and shall conform to the requirements of ASTM A 615. Unless otherwise specified, steel bars meeting the requirements of ASTM A 706 may be substituted for ASTM A 615 steel bars. When ASTM A 706 bars are used, tack welding of the reinforcement will not be permitted unless approved in writing by the Engineer.

1003-3 Wire: of the Standard Specifications is revised to read:

Steel wire used as spirals or ties for reinforcement in concrete shall conform to the requirements of ASTM A 82.

1003-5.02 Epoxy for Coating: the first paragraph of the Standard Specifications is revised to read:

A list of powdered epoxy resins which have passed prequalification tests, as described in ASTM A 775, "Epoxy-Coated Steel Reinforcing Bars", and which may be used if the material is applied and cured in the same manner as that used to coat the test bars in the original powder prequalification test may be found on the Department's Approved Products List. Copies of the most current version are available on the internet from the ADOT Research Center through its Product Evaluation Program.

1003-5.02 Epoxy for Coating: the fifth paragraph of the Standard Specifications is revised to read:

The contractor shall furnish a Certificate of Compliance from the coating manufacturer, conforming to the requirements of Subsection 106.05. The Certificate of Compliance shall properly identify the batch and/or lot number, material, quantity of batch, date of manufacture, name and address of manufacturer, and a statement that the material is the same composition as the initial sample prequalified for use. The certificate shall also state that production bars and prequalification bars have been identically prepared and applied with epoxy powders.

1003-5.03 Application of Coating: the second paragraph of the Standard Specifications is revised to read:

The surface to be coated shall be blast cleaned in accordance with the requirements of the Society for Protective Coatings, Surface Preparation Standard SSPC-SP10, Near White Blast Cleaning.

1003-5.03 Application of Coating: the fifth paragraph of the Standard Specifications is revised to read:

The epoxy coating shall be applied as a smooth uniform coat. After curing, the coating thickness shall be ten \pm two mils. Coating thickness shall be controlled by taking measurements on a representative number of bars from each production lot. Coating thickness measurements shall be conducted by the method outlined in the Society for Protective Coatings Paint Application Standard SSPC-PA2.

1003-5.03 Application of Coating: the ninth and tenth paragraphs of the Standard Specifications are revised to read:

The contractor shall furnish a Certificate of Analysis from the coating applicator, conforming to the requirements of Subsection 106.05, with each shipment of coated steel. In addition to the requirements of Subsection 106.05, the Certificate of Analysis shall state that the coated items and coating material have been tested in accordance with the requirements of this subsection and that the entire lot is in a fully-cured condition.

The coating applicator shall be responsible for performing quality control and tests. This will include inspection and testing to determine compliance with the requirements of this subsection for the coating thickness, continuity of coating, coating cure, and flexibility of coating.

(1005PG, 7/01/14)

SECTION 1005 BITUMINOUS MATERIALS:

1005-2 Sampling of Bituminous Material: the first sentence of the first paragraph of the Standard Specifications is revised to read:

Sampling of bituminous material shall conform to the requirements of Arizona Test Method 103.

1005-3.01 Asphalt Cement: the second paragraph of the Standard Specifications is revised to read:

If PG 76-22 TR+ asphalt binder is used, it shall conform to the requirements of Table 1005-1a.

If PG 70-22 TR+ asphalt binder is used, it shall conform to the requirements of Table 1005-1b.

If PG 64-28 TR+ asphalt binder is used, it shall conform to the requirements of Table 1005-1c.

1005-3.04 Emulsified Asphalt (Special Type): of the Standard Specifications is revised to read:

Emulsified asphalt (special type) shall consist of Type SS-1 or CSS-1 diluted with water to provide an asphalt content not less than 26 percent. The water used must be potable. The material shall not be diluted in the field.

TABLE 1005-1: "Creep Stiffness of PAV Binder" in Table 1005-1 of the Standard Specifications is revised to read:

TABLE 1005-1 ASPHALT BINDER ADJUSTMENT TABLE			
Test Property	AASHTO Test Method	Test Result	Percent of Contract Unit Price Allowed
Creep Stiffness of PAV Binder: S, MPa	T 313	≤ 300	100
		301-330	95
		331-450	85
		451-600	75
		> 600	65 (1)

TABLE 1005-1b: PG 70-22 TR+ ASPHALT BINDER is hereby added to the Standard Specifications

TABLE 1005-1b PG 70-22 TR+ ASPHALT BINDER				
Test Property	Test Method	Requirement	Test Result	Percent of Contract Unit Price Allowed
Solubility in Trichloroethylene, %, minimum	ASTM D 2042	97.5	-----	-----
Softening Point, °C, minimum	AASHTO T 53	54	≥ 54	100
			51 - 53	85
			< 51	70 (1)
Elastic Recovery, @ 10 °C, %, Minimum	AASHTO T 301	55	≥ 55	100
			50 - 54	85
			< 50	70 (1)

Phase Angle (δ), @ 70 °C @ 10 rad/sec, degrees, maximum	AASHTO T 315	75	≤ 75 76 - 83 > 83	100 85 65 (1)
(1) Reject Status: The pay adjustment applies if allowed to remain in place.				
Notes:				
<p>PG 70-22 TR+ asphalt binder shall contain a minimum of 8 percent crumb rubber and a minimum of two percent SBS (styrene-butadiene-styrene) polymer.</p> <p>PG 70-22 TR+ asphalt binder shall conform to the requirements of AASHTO M 320 and, in addition, shall meet the requirements specified above.</p> <p>Table 1005-1 will also apply for PG 70-22 TR+ asphalt binder.</p> <p>Should the bituminous material be deficient on more than one of the properties listed in Tables 1005-1 and 1005-1b, the pay adjustment will be the greatest reduction to the contract unit price specified considering individual test results.</p> <p>The pressure aging temperature for PG 70-22 TR+ asphalt binder shall be 110 °C.</p> <p>The crumb rubber shall be derived from processing whole scrap tires or shredded tire materials. The tires from which the crumb rubber is produced shall be taken from automobiles, trucks, or other equipment owned and operated in the United States. The processing shall not produce, as a waste product, casings or other round tire material that can hold water when stored or disposed of above ground.</p>				

TABLE 1005-1c: PG 64-28 TR+ ASPHALT BINDER is hereby added to the Standard Specifications:

TABLE 1005-1c PG 64-28 TR+ ASPHALT BINDER				
Test Property	Test Method	Requirement	Test Result	Percent of Contract Unit Price Allowed
Solubility in Trichloroethylene, %, minimum	ASTM D 2042	97.5	-----	-----
Softening Point, °C, minimum	AASHTO T 53	50	≥ 50 47 - 49 < 47	100 85 70 (1)

Elastic Recovery, @ 10 °C, %, Minimum	AASHTO T 301	55	≥ 55 50 - 54 < 50	100 85 70 (1)
Phase Angle (δ), @ 64 °C @ 10 rad/sec, degrees, maximum	AASHTO T 315	75	≤ 75 76 - 83 > 83	100 85 65 (1)

(1) Reject Status: The pay adjustment applies if allowed to remain in place.

Notes:

PG 64-28 TR+ asphalt binder shall contain a minimum of 8% crumb rubber and a minimum of two percent SBS (styrene-butadiene-styrene) polymer.

PG 64-28 TR+ asphalt binder shall conform to the requirements of AASHTO M 320 and, in addition, shall meet the requirements specified above.

Table 1005-1 will also apply for PG 64-28 TR+ asphalt binder.

Should the bituminous material be deficient on more than one of the properties listed in Tables 1005-1 and 1005-1c, the pay adjustment will be the greatest reduction to the contract unit price specified considering individual test results.

The pressure aging temperature for PG 64-28 TR+ asphalt binder shall be 100 °C.

The crumb rubber shall be derived from processing whole scrap tires or shredded tire materials. The tires from which the crumb rubber is produced shall be taken from automobiles, trucks, or other equipment owned and operated in the United States. The processing shall not produce, as a waste product, casings or other round tire material that can hold water when stored or disposed of above ground.

TABLE 1005-3a: “Elastic Recovery by means of Ductilometer” is revised and “Note 2” is added in Table 1005-3a of the Standard Specifications:

TABLE 1005-3a POLYMERIZED CATIONIC RAPID SET (CRS-2P) EMULSIFIED ASPHALT (1)		
Tests on Emulsion:	Test Method	Requirement
Elastic Recovery by means of Ductilometer, 25 °C (77 °F), % minimum	AASHTO T 301 (2)	55
(2) Testing shall be performed on residue by distillation, not on residue by oven evaporation.		

TABLE 1005-3b: “Elastic Recovery by means of Ductilometer” is revised and “Note 3” is added in Table 1005-3b of the Standard Specifications:

TABLE 1005-3b POLYMERIZED HIGH FLOAT EMULSIFIED ASPHALT (1)			
Tests on Emulsion:	Test Method	Requirement	
		HFE-150P	HFE-300P
Elastic Recovery by means of Ductilometer, 4 °C (39.2 °F), % minimum	AASHTO T 301 (3)	25	25
(3) Testing shall be performed on residue by distillation, not on residue by oven evaporation.			

TABLE 1005-6: PG 70-22 TR+ and PG 64-28 TR+ are added to “Paving Asphalt” in Table 1005-6 of the Standard Specifications:

TABLE 1005-6 OTHER REQUIREMENTS			
Grade of Asphalt Specification Designation	Range of Temperatures for Application by Spraying, °F (Not applicable for Plant Mixing)	Range of Aggregate Temperatures for Plant Mixing, °F	Basis of Conversion, Average Gallons Per Ton at 60 °F
Paving Asphalt	275 - 400	-----	
PG 76-XX			232
PG 70-XX			233
PG 64-XX			235
PG 58-XX			236
PG 52-XX			238
PG 76-22 TR+			229
PG 70-22 TR+			230
PG 64-28 TR+			231

(1006PCC, 10/03/14)

SECTION 1006 PORTLAND CEMENT CONCRETE:

1006-1 General Requirements: of the Standard Specifications is revised to read:

Portland cement concrete shall consist of a mixture of hydraulic cement, fine aggregate, coarse aggregate, and water. It may also contain air-entraining admixtures, chemical admixtures, and supplementary cementitious materials.

The contractor shall determine the mix proportions and shall furnish concrete which conforms to the requirements of the specifications. All concrete shall be sufficiently workable, at the slump proposed by the contractor within the specified range, to allow proper placement of the concrete without harmful segregation, bleeding, or incomplete consolidation. It shall be the responsibility of the contractor to proportion, mix, place, finish, and cure the concrete properly in accordance with the requirements of the specifications

1006-2.01 Hydraulic Cement: the second through the fifth paragraphs of the Standard Specifications are revised to read:

Portland cement shall conform to the requirements of ASTM C 150 for Type II, III, or V, and shall be low alkali cement containing not more than 0.60 percent total alkali (Na₂O equivalent).

Portland-pozzolan cement shall conform to the requirements of ASTM C 595 for blended hydraulic cement with moderate sulfate resistance, Type IP (MS).

Cementitious material is defined as an inorganic material or a mixture of inorganic materials that sets and develops strength by chemical reaction with water by formation of hydrates and is capable of doing so under water. In this specification, cementitious materials are defined as: hydraulic cement (Portland cement or Portland-pozzolan cement) and supplementary cementitious material (Fly Ash, Natural Pozzolan, or Silica Fume).

Hydraulic cement shall be approved prior to its use in accordance with ADOT Materials Policy and Procedure Directive No. 13, "Certification and Acceptance of Hydraulic Cement, Fly Ash, Natural Pozzolan, Silica Fume, and Lime".

1006-2.02 Water: the first sentence of the first paragraph of the Standard Specifications is revised to read:

The water used shall be free of injurious amounts of oil, acid, alkali, clay, vegetable matter, silt, or other harmful matter.

1006-2.03(A) General Requirements: the first paragraph of the Standard Specifications is revised to read:

When concrete is to be placed at elevations above 4,500 feet, the fine aggregate and the coarse aggregate shall be subjected to five cycles of the sodium sulfate soundness test, and the weighted percentage loss determined separately for each, in accordance with the requirements of AASHTO T 104. The weighted percentage loss determined for each shall not exceed 10 percent. Tests for soundness may be waived when aggregates from the same source have been approved and the approved test results apply to the current production from that source.

1006-2.03(A) General Requirements: the second paragraph of the Standard Specifications is hereby deleted:

1006-2.03(A) General Requirements: the fifth paragraph of the Standard Specifications is revised to read:

When aggregates are stored on the ground, the sites for the stockpiles shall be level and clear of all vegetation. The bottom one-foot layer of aggregate shall not be disturbed or used.

1006-2.03(A) General Requirements: "Lightweight particles" in the table of the ninth paragraph of the Standard Specifications is revised to read:

Lightweight particles (Specific gravity less than 2.0)	AASHTO T 113 (See Note)
--	-------------------------

1006-2.03(B) Fine Aggregate: "Lightweight particles" in the table of the second paragraph of the Standard Specifications is revised to read:

Lightweight particles (Specific gravity less than 2.0)	AASHTO T 113 (Except that the percent of lightweight particles shall be reported to the nearest 0.01%.)	1.25% (0.25% Max. Coal and Lignite*)
--	--	---

1006-2.03(B) Fine Aggregate: the last paragraph of the Standard Specifications is revised to read:

Fine aggregate shall be made into mortar and subjected to testing under AASHTO T 71, except that the mortar shall develop a compressive strength at seven and 28 days of not less than 90 percent of that developed by a mortar prepared in the same manner with the same Type II cement and graded sand conforming to the requirements of ASTM C 778.

1006-2.03(C) Coarse Aggregate: "Lightweight particles" in the table of the second paragraph of the Standard Specifications is revised to read:

Lightweight particles (Specific gravity less than 2.0)	AASHTO T 113 (Except that the percent of lightweight particles shall be reported to the nearest 0.01%.)	1.25% (0.25% Max. Coal and Lignite*)
--	--	---

1006-2.04(A) General Requirements: the first paragraph of the Standard Specifications is hereby deleted.

1006-2.04(B) Air-Entraining Admixtures: the first paragraph of the Standard Specifications is revised to read:

Air-entraining admixtures shall conform to the requirements of ASTM C 260.

Air-entraining admixtures shall be approved prior to their use in accordance with ADOT Materials Policy and Procedure Directive No. 2, "Certification and Acceptance of Chemical and Air-Entraining Admixtures for Portland Cement Concrete".

1006-2.04(C) Chemical Admixtures: the first paragraph of the Standard Specifications is revised to read:

Chemical admixtures shall conform to the requirements of ASTM C 494.

Chemical admixtures shall be approved prior to their use in accordance with ADOT Materials Policy and Procedure Directive No. 2, "Certification and Acceptance of Chemical and Air-Entraining Admixtures for Portland Cement Concrete".

1006-2.04(D) Supplementary Cementitious Material (Fly Ash, Natural Pozzolan, and Silica Fume): the first paragraph of the Standard Specifications is revised to read:

Supplementary cementitious materials may be used in addition to hydraulic cement. Supplementary cementitious materials shall be approved prior to their use in accordance with ADOT Materials Policy and Procedure Directive No. 13, "Certification and Acceptance of Hydraulic Cement, Fly Ash, Natural Pozzolan, Silica Fume, and Lime".

1006-2.04(D) Supplementary Cementitious Material (Fly Ash, Natural Pozzolan, and Silica Fume): the last two paragraphs of the Standard Specifications are revised to read:

When a supplementary cementitious material with a calcium oxide content greater than 15 percent is proposed, the hydraulic cement/supplementary cementitious material blend shall be tested for sulfate expansion in accordance with ASTM C 1012. The maximum expansion shall be 0.10 percent at six months.

When either moderate or high sulfate resistant concrete is specified in the Special Provisions, the proposed hydraulic cement/supplementary cementitious material blend shall be tested for sulfate expansion in accordance with ASTM C 1012. When moderate sulfate resistance is specified, the maximum expansion shall be 0.10 percent at six months. When high sulfate resistance is specified, the maximum expansion shall be 0.05 percent at six months or 0.10 percent at one year.

1006-2.05 Concrete Curing Materials: the second paragraph of the Standard Specifications is revised to read:

Acceptance of concrete curing materials shall be as specified in ADOT Materials Policy and Procedure Directive No. 3, "Curing Compounds".

1006-3.01 Design Criteria: Table 1006-A of the Standard Specifications is revised to read:

TABLE 1006-A				
Class of Concrete	Minimum 28-Day Compressive Strength Required: psi (See Note 1)	Cementitious Material Content: Lbs per Cu Yd Minimum - Maximum (See Notes 2, 3, and 4)	Maximum Water/Cementitious Material Ratio (w/cm): Lb./Lb.	Slump Range: Inches
B	2,500	470 – 658	None	(See Note 6)
S	2,500	520 – 752	0.55	
	3,000 (See Note 5)			
	3,500			
	4,000	564 – 752	0.50	
	4,500			
Greater than 4,500	564 - 800	0.45		
P	4,000	564 – 658	None	0 – 4.5
H	High performance concrete as specified in project special provisions.			

Note 1: Testing for compressive strength of cylinders for all classes of concrete shall be in accordance with the requirements of Arizona Test Method 314.

Note 2: A supplementary cementitious material (fly ash, natural pozzolan, or silica fume) conforming to the requirements of Subsection 1006-2.04(D) may be used, as specified in paragraphs (a) through (f) below.

(a) When Portland cement is used, a maximum of 25 percent, by weight of the cementitious material, may be an approved fly ash or natural pozzolan, except as specified in paragraphs (d), (e), and (f) below.

(b) When Portland-pozzolan cement [Type IP (MS)] is used, fly ash or natural pozzolan is not allowed, except as specified in paragraphs (d), (e), and (f) below.

(c) When silica fume is used, a maximum of 10 percent, by weight of either Portland cement or Portland-pozzolan cement, may be used.

(d) When a compressive strength greater than 4,500 psi is required, supplementary cementitious material may be added in excess of the maximum cementitious material content. Fly ash or natural pozzolan may exceed 25 percent, by weight of the cementitious material, if approved by the Engineer.

(e) When increased sulfate resistance is specified, the required amount of fly ash or natural pozzolan shall be incorporated into the concrete and may exceed 25 percent, by weight of the cementitious material.

(f) For Class S concrete used in bridge decks, a minimum of 20 percent, by weight of the cementitious material, must be an approved Class F fly ash or natural pozzolan, unless otherwise approved by the Engineer.

Note 3: For any concrete mix, other than for precast and/or prestressed bridge members, with a Portland cement content greater than 545 pounds per cubic yard, **one** of the options specified in paragraphs (a) through (e) below for the mitigation of a potential alkali silica reaction (ASR) shall be used:

(a) A minimum of 20 percent Class F fly ash or natural pozzolan, by weight of the cementitious material, shall be used. The Class F fly ash or natural pozzolan shall have a calcium oxide content of 15 percent or less.

(b) Instead of using Portland cement, Type IP (MS) Portland-pozzolan cement with a Class F fly ash or natural pozzolan content of at least 20 percent, by weight of the cementitious material, shall be used. The Class F fly ash or natural pozzolan shall have a calcium oxide content of 15 percent or less.

(c) Limit the total alkali (Na_2O equivalent) to a maximum of 3.00 pounds per cubic yard of concrete, when calculated as follows:

$$\left[\begin{array}{l} \text{Pounds of total} \\ \text{alkali per cubic} \\ \text{yard of concrete} \end{array} \right] = \frac{\left(\begin{array}{l} \text{Pounds of Portland} \\ \text{cement per cubic} \\ \text{yard of concrete} \end{array} \right) \times \left(\begin{array}{l} \text{Na}_2\text{O equivalent (\%)} \\ \text{in Portland cement} \end{array} \right)}{100}$$

(d) Introduce a lithium nitrate admixture, which has been approved by the Engineer, at a minimum dosage of 0.55 gallons of 30 percent lithium nitrate solution per pound of total alkali (Na_2O equivalent) per cubic yard of concrete. The required amount of lithium nitrate is calculated as follows:

$$\left[\begin{array}{l} \text{Required gallons} \\ \text{of 30 percent} \\ \text{lithium nitrate} \\ \text{solution} \end{array} \right] = \frac{\left(\begin{array}{l} \text{Pounds of} \\ \text{Portland cement} \\ \text{per cubic yard} \\ \text{of concrete} \end{array} \right) \times \left(\begin{array}{l} \text{Na}_2\text{O equivalent (\%)} \\ \text{in Portland cement} \end{array} \right)}{100} \times (0.55)$$

(e) The coarse aggregate and the fine aggregate shall be tested separately in accordance with ASTM C 1260 to determine the potential for alkali silica reaction (ASR). When aggregates show the potential for ASR, as indicated by expansions of 0.10% or greater at 16 days after casting, sufficient mitigation for the expansion shall be determined in accordance with ASTM C 1567. The use of fly ash or natural pozzolan may exceed 25 percent, by weight of the cementitious material.

Note 4: Unless otherwise specified, the cementitious material content shall be as shown.

Note 5: Unless otherwise shown on the plans.

Note 6: The proposed slump shall be chosen by the contractor. Concrete at the proposed slump shall be sufficiently workable to allow proper placement without harmful segregation, bleeding, or incomplete consolidation.

1006-3.01 Design Criteria: the second, third, and fourth paragraphs of the Standard Specifications are revised to read:

Air-entraining admixtures will be required for all classes of concrete placed at an elevation of 3,000 feet or above. The air content of the concrete mixture shall not be less than four percent nor more than seven percent by volume. However, no air-entrainment will be required for minor precast structures, precast pipe, and precast, prestressed structural members supporting a concrete deck slab or impervious overlay. Also, no air-entrainment will be required for any precast items constructed using the dry pack or no-slump method. For elevations below 3,000 feet, air-entraining admixtures may be used at the option of the contractor. If air-entraining admixtures are used, the air content of the concrete mixture shall not exceed seven percent by volume.

Concrete that fails to conform to the air content requirements listed above for the respective elevation as determined by the Engineer, shall be rejected prior to placement.

1006-3.01 Design Criteria: the first and second sentences of the sixth paragraph of the Standard Specifications are revised to read:

The coarse aggregate size designation for Class S or Class B concrete shall be chosen by the contractor and approved by the Engineer and shall conform to the size designation and grading requirements of AASHTO M 43. In choosing the size designation, the maximum size of coarse aggregate shall not be larger than one fifth of the narrowest dimension between the sides of adjacent forms, or two thirds of the minimum clear spacing between reinforcing bars, or two thirds of the minimum clear spacing between reinforcing bars and the sides of adjacent forms, or one third of the depth of the slab, whichever is least.

1006-3.01 Design Criteria: the first sentence of the seventh paragraph of the Standard Specifications is revised to read:

Coarse aggregate for Class P concrete used to construct Portland cement concrete pavement without load transfer dowels shall be separated into two or more stockpiles.

1006-3.02 Design Procedures: the first paragraph of the Standard Specifications is revised to read:

At least two weeks prior to the appropriate concreting operation, the contractor shall furnish a mix design for each class of concrete and each strength of Class S concrete for review and approval. More than one mix design for each class of concrete and each strength of Class S concrete may be submitted for approval provided specific items and locations of intended uses accompany the mix design. The contractor shall substantiate each mix design by furnishing test data and providing all details of the mixtures proposed for use. Mix designs, for other than precast or prestressed concrete, shall be prepared by or under the direction of, and signed by, a registered professional engineer, a NICET Level III or higher certified technician in the concrete subfield, a NRMCA Level 3 Certified Concrete Technologist, or an ACI certified Concrete Laboratory Testing Technician Level 2 or Grade II. Mix designs for precast or prestressed concrete shall be prepared by or under the direct supervision of, and signed by, either one of the individuals listed above or a PCI Quality Control Technician/Inspector Level II or higher. Individuals preparing and submitting mix designs shall have experience in the development of mix designs and mix design testing for the respective type of concrete.

1006-3.02 Design Procedures: the second and third paragraphs of the Standard Specifications are revised to read:

The complete solid volume mix designs submitted for approval shall include all weights and volumes of all ingredients. The brand, type, and source of hydraulic cement and admixtures, the coarse aggregate size number designation, source of aggregates, the specific gravities of all ingredients, the proposed slump, the water/cementitious material ratio, a product code to identify the mix design, and the intended use of each mix design shall be an integral part of each mix design.

The use of new and previously used mix designs, and the requirements for trial batches, will be as required by ADOT Materials Policy and Procedure Directive No. 15, "Submittal and Approval of Portland Cement Concrete Mix Designs".

1006-4.01 General Requirements: of the Standard Specifications is revised to read:

The contractor may obtain concrete for each class of concrete and for each strength of Class S concrete from a source approved by the Engineer in lieu of establishing a batch plant at the project site.

For each class of concrete and each strength of Class S concrete, except for Class P concrete produced in a batch plant at the site and used exclusively for Class P work, the contractor shall furnish a delivery ticket for each batch of concrete. The minimum information to be shown on each delivery ticket shall be the date, time batched, truck identification number, name or identification of batch plant, name of contractor, name and

location of project, the quantity of concrete, the batch weights/volumes or mix design product code, the amount of permissible additional water to meet the design water/cementitious material ratio, and the number of revolutions that the concrete has been mixed at mixing speed in a truck mixer. An authorized representative of the contractor shall be responsible for each delivery ticket and shall sign each delivery ticket accepting the contractor's responsibility for the concrete. The representative shall immediately furnish the delivery ticket to the Engineer.

When requested by the Engineer, the contractor shall supply a separate record for each batch of concrete which shows the batch weight/volume of each individual ingredient.

1006-4.02(A) Hydraulic Cement: the last sentence of the first paragraph of the Standard Specifications is hereby deleted:

1006-4.03(A) General Requirements: the last sentence of the first paragraph of the Standard Specifications is revised to read:

Concrete may be mixed in a mobile mixer at the site for Class S or Class B concrete, provided written permission of the Engineer is granted.

1006-4.03(B) Mixing in a Stationary Mixer: the last sentence of the third paragraph of the Standard Specifications is revised to read:

The mixing time shall be not less than 60 seconds for one cubic yard and shall be increased 15 seconds for each additional cubic yard or fraction thereof for Class S or Class B concrete.

1006-4.03(C) Mixing in Truck Mixers: the first sentence of the last paragraph of the Standard Specifications is revised to read:

If additional mixing water is required to maintain the mix design water/cementitious material ratio, the concrete shall be mixed by a minimum of 30 revolutions of the drum at mixing speed after the water has been added, prior to discharge of any concrete for placement.

1006-4.03(D) Mixing in Mobile Mixers: of the Standard Specifications is revised to read:

Concrete mixing in mobile mixers for Class S or Class B concrete shall be performed in accordance with the requirements of AASHTO M 241.

1006-4.04 Consistency: the second paragraph of the Standard Specifications is revised to read:

The contractor shall furnish Class S and Class B concrete having the slump shown on the approved mix design, with a permissible variation of \pm one inch when the slump shown on the approved mix design is four inches or less, and a permissible variation of $\pm 1\frac{1}{2}$ inches when the slump shown on the approved mix design is greater than four inches. However,

when an approved high range water reducing chemical admixture (ASTM C 494, Type F or Type G) conforming to the requirements of Subsection 1006-2.04 is used, the permissible variation will be \pm two inches, regardless of the slump shown on the approved mix design.

1006-5 Weather Limitations: the title of the Standard Specifications is revised to read:

1006-5 Concrete Temperature and Weather Limitations:

1006-5.01 General Requirements: of the Standard Specifications is revised to read:

The temperature of the concrete mixture immediately before placement shall not be less than 50 degrees F nor greater than 90 degrees F. Concrete that fails to conform to this temperature requirement shall be rejected prior to placement.

Under rainy conditions, placing of concrete shall be stopped before the quantity of surface water is sufficient to cause a flow or wash of the concrete surface or have a detrimental effect on the finished concrete and acceptance parameters.

Placing of concrete shall immediately cease if the hauling vehicles or any equipment or pedestrian traffic tracks mud on the prepared base or changes the allowable subgrade dimensional tolerances for Class P concrete and slabs placed on subgrade for Class S or Class B concrete.

1006-5.02 Hot Weather Concreting: of the Standard Specifications is revised to read:

Forms, subgrade, and reinforcing steel shall be sprinkled with cool water just prior to the placement of concrete.

Mix water may be cooled by refrigeration, liquid nitrogen, or well-crushed ice of a size that will melt completely during the mixing operation. If crushed ice is used, it shall be substituted for part of the mix water on a pound for pound basis.

1006-5.03 Cold Weather Concreting: of the Standard Specifications is revised to read:

Concrete shall not be placed on or against ice-coated forms, reinforcing steel, structural steel, conduits, or construction joints; nor on or against snow, ice, or frozen earth materials. Immediately prior to placing concrete, the temperature of forms, reinforcing steel, earthen material, or any other material that will come in contact with the freshly placed concrete shall be a minimum temperature of 40 degrees F. If artificial heat is used to adjust the temperature of the items that will come in contact with the freshly mixed concrete, the temperature of these items shall not exceed 10 degrees F greater than that of the concrete being placed.

Concrete operations shall be discontinued when a descending ambient temperature in the shade and away from artificial heat falls below 40 degrees F. Concrete operations shall not be resumed until an ascending ambient temperature in the shade and away from artificial heat exceeds 35 degrees F unless otherwise approved by the Engineer.

Mixing and placing concrete shall continue no later in any day than that time which will allow sufficient time to place and protect the concrete already poured before the ambient temperature drops to 35 degrees F.

Concrete shall be protected in a manner to maintain all concrete surface temperatures at not less than 50 degrees F for a period of 72 hours after placement and at not less than 40 degrees F for an additional 96 hours.

The contractor may use equipment to heat the aggregates or water, or both, prior to mixing. If aggregates are heated, the minimum temperature of the heated aggregate shall be 60 degrees F and the aggregates shall have no chunks of ice or frozen aggregate present. Equipment used to heat the aggregates shall be such that consistent temperatures are obtained throughout the aggregate within each batch and from one batch to another. Water shall not be heated in excess of 150 degrees F unless the water is mixed with the aggregate prior to the addition of cement to the batch. During the heating or mixing process, cement shall not be added to water and aggregate combinations which exceed 100 degrees F.

When weather forecasts indicate a probability that ambient temperatures will fall below 35 degrees F during the placement or curing periods, the contractor shall submit a cold weather concreting plan to the Engineer for approval prior to concrete placement. The cold weather concreting plan shall detail methods and equipment which will be used to ensure that the required concrete temperatures are maintained. The contractor shall provide adequate cold weather protection in the form of insulation and/or heated enclosures to protect the concrete after placement. For bridge decks and suspended structures, the cold weather concreting plan shall include protection measures for both the top and bottom surfaces of the concrete. This protection shall maintain concrete surface temperatures as specified above at all locations in the structure. When artificial heating is required, the heating units shall not locally heat or dry the surface of the concrete.

When a cold weather concreting plan is required, the Engineer may require concrete temperatures to be measured and continuously recorded by the use of temperature sensing devices during the entire curing period. The contractor shall provide the temperature sensing devices and recording instruments. The contractor shall install temperature sensing devices near the surface of the concrete at locations and depths designated by the Engineer. When concrete is placed on a bridge deck or suspended structure, both the bottom surface and the top surface shall be monitored with temperature sensing devices. Temperature sensing devices and recording instruments shall be approved by the Engineer. The contractor shall continuously monitor the concrete temperature and provide the recorded data to the Engineer at any time upon request.

If the surface concrete temperature at any location in the structure falls below 35 degrees F during the curing period, the Engineer may direct the contractor to core the areas in

question at the locations indicated by the Engineer. The contractor shall submit the cores to a petrographer for examination in accordance with ASTM C 856. Concrete damaged by frost, as determined by the petrographer, shall be removed and replaced at no additional cost to the Department. All costs associated with coring, transmittal of cores, and petrographic examination shall be borne by the contractor regardless of the outcome of the petrographic examination.

The placing of concrete will not be permitted until the Engineer is satisfied that all the necessary protection equipment and materials are on hand at the site and in satisfactory working condition.

Concrete requiring cold weather protection shall have such protection removed at the end of the required curing period in such a manner that will permit a gradual drop in the concrete temperatures.

1006-7.01 **General:** the second paragraph of the Standard Specifications is revised to read:

Rejection of concrete will also occur due to insufficient compressive strength. Concrete compressive strength requirements consist of the specified strength which the concrete shall attain before various loads or stresses are applied and a minimum strength at 28 days.

1006-7.01 **General:** the last sentence of the third paragraph of the Standard Specifications is revised to read:

Sampling and testing for compressive strength will be performed on all classes of concrete furnished, including each strength specified on the project plans for Class S concrete.

1006-7.02 **Sampling and Testing of Concrete:** the first sentence of item (1) of the second paragraph of the Standard Specifications is revised to read:

(1) Concrete for Class S or Class B shall be sampled only once during discharge in the middle portion of the batch.

1006-7.02 **Sampling and Testing of Concrete:** of the Standard Specifications is modified to add:

If approved by the Engineer, and unless otherwise specified, Arizona Test Method 318 may be used to estimate concrete strength by the maturity method. The maturity method shall not substitute for compressive strength acceptance testing (28-day test cylinder breaks). The contractor shall submit a written request to the Engineer prior to using the maturity method. If its use is approved by the Engineer, the contractor shall be responsible to develop the strength-maturity relationship and shall also be responsible to provide the maturity meter(s) and digital data loggers necessary, as well as performing all required testing, all at no additional cost to the Department.

1006-7.03(A) **Class S and Class B Concrete:** of the Standard Specifications is revised to read:

For Class S concrete with a compressive strength requirement less than 4000 psi, a sample of concrete for the required tests, as specified in Subsection 1006-7.02, will be taken on a daily basis for each 100 cubic yards, or fraction thereof, of continuously placed concrete from each batch plant. For Class S concrete with a compressive strength requirement equal to or greater than 4000 psi, a sample of concrete for the required tests, as specified in Subsection 1006-7.02, will be taken on a daily basis for each 50 cubic yards, or fraction thereof, of continuously placed concrete from each batch plant. For Class B concrete, a sample of concrete for the required tests, as specified in Subsection 1006-7.02, will be taken for each 100 cubic yards placed from each batch plant. For Class S or Class B concrete placed at elevations of 3,000 feet or above, air content testing shall be performed for each 50 cubic yards placed, regardless of the compressive strength requirement. An additional sample or samples for any of the required tests may be taken at an interval of less than the sampling frequency specified above, at the discretion of the Engineer, on any batch or load of concrete. A sample for the required tests on daily placements of 10 cubic yards or less may be taken at the discretion of the Engineer.

1006-7.03(B) Class E Concrete: of the Standard Specifications is revised to read:

1006-7.03(B) BLANK

1006-7.06(A) Class P Concrete: the fourth sentence of the second paragraph of the Standard Specifications is revised to read:

Cores must be obtained under the observation of an ADOT representative and delivered to the Engineer in time to allow complete testing within 48 days of placement. Testing shall be performed by the Department.

1006-7.06(B) Class S and Class B Concrete: the second paragraph of the Standard Specifications is revised to read:

Concrete failing to meet at least 85 percent of the 28-day compressive strength for specified strengths of 3,000 pounds per square inch and below, 90 percent for a specified strength of 3,500 pounds per square inch, or 95 percent for specified strengths of 4,000 pounds per square inch and above, or any concrete failing to meet the other requirements of Subsection 1006-7.01, will be rejected and removed at no additional cost to the Department and replaced with concrete which meets the specified requirements, unless the contractor can submit evidence that will indicate to the Engineer that the strength and quality of the concrete is such that the concrete should be considered acceptable and be allowed to remain in place.

1006-7.06(B) Class S and Class B Concrete: the third sentence of the last paragraph of the Standard Specifications is revised to read:

All cores shall be obtained and tested in accordance with the requirements of Arizona Test Method 317. Testing shall be performed by the Department.

1006-7.06(C) Class E Concrete: of the Standard Specifications is revised to read:

1006-7.06(C) BLANK

(1007REFS, 11/05/13)

SECTION 1007 - RETROREFLECTIVE SHEETING:

1007-1 General Requirements: the last two sentences of the first paragraph of the Standard Specifications are revised to read:

Sheeting shall conform to criteria listed in the most current version of ASTM D 4956 for the applicable type and class, unless otherwise specified.

1007-2 Material Types: of the Standard Specifications is revised to read:

Sheeting for permanent warning signs, regulatory signs, and overhead-mounted guide signs, including all sign legends and borders, shall be ASTM Type XI.

Sheeting for all warning signs with yellow backgrounds shall be Type XI fluorescent retroreflective yellow.

Sheeting for information signs, ground-mounted guide signs, and marker signs, including all sign legends and borders, shall be ASTM Type IX or XI.

Sheeting for permanent object markers and delineators on a rigid substrate with yellow backgrounds, including guardrail end treatments, guardrail markers, rigid delineators, and impact attenuators, shall be Type XI fluorescent retroreflective yellow.

Sheeting for permanent object markers and delineators on a rigid substrate in colors other than yellow, including guardrail end treatments, guardrail markers, rigid delineators, and impact attenuators, shall be ASTM Type IX or XI.

Sheeting for object markers and delineators on a flexible or plastic substrate, including flexible delineators and sand barrels, shall be ASTM Type VIII, IX or XI.

For temporary regulatory and guide signs on a rigid substrate with fluorescent retroreflective orange sheeting, ASTM sheeting Types VIII, IX, or XI shall be used.

For temporary regulatory and guide signs on a rigid substrate in colors other than fluorescent retroreflective orange, ASTM sheeting Types IV, VIII, IX, or XI shall be used.

For retroreflective orange temporary signs on a flexible or roll-up substrate, ASTM Type VI sheeting shall be used.

All temporary signs (rigid, flexible, or roll-up) with orange backgrounds shall use fluorescent retroreflective orange sheeting, except that non-reflective sign materials may be used for temporary signs where the signs will be clearly visible under available natural light.

For barricades and other temporary channelizing devices, ASTM sheeting Types IV, VIII, IX, or XI shall be used.

Sheeting for Adopt-A-Highway signs shall be ASTM Type I, IV, or XI.

Logo signs shall be ASTM Type I, IX, or XI.

When more than one sheeting type is allowed, the contractor may use any of the types listed, provided that materials used for a particular application shall be of the same ASTM type, manufacturer, and product for all signs of the same type in the project.

Opaque films used with sheeting shall be acrylic type films.

Direct-applied and demountable black characters shall be non-reflective.

1007-3 Visual Appearance, Luminance and Color Requirements: of the Standard Specifications is revised to read:

Except as specified herein, the color of the sheeting, ink or film shall conform to the ADOT Manual of Approved Signs, the Manual on Uniform Traffic Control Devices (MUTCD), and the plans.

All sheeting, inks and film used shall be uniformly colored so there is no visual variation in their appearance on the same sign or from sign to sign of the same colors.

Standard colors specified for sheeting, processing inks, and films shall, as applicable, match visually and be within the color tolerance limits required by Highway Tolerance Charts issued by the Federal Highway Administration. Additionally, for the retroreflective sheeting, unless otherwise noted, the Luminance Factor (Daytime Luminance) and Color Specification Limits (Daytime) shall conform to the applicable requirements of ASTM D 4956.

In addition to the luminance and color requirements, fluorescent orange sheeting and fluorescent yellow sheeting shall have the capacity to effectively fluoresce outdoors under low light conditions. For all applications requiring fluorescent orange sheeting or fluorescent yellow sheeting, the contractor shall provide a letter to the Engineer from the manufacturer certifying that the sheeting to be used is fluorescent.

1007-6 Adhesive: the first paragraph of the Standard Specifications is revised to read:

Reflective sheeting and film adhesives shall be Class I as specified in ASTM D 4956 and as modified herein.

1007-6 Adhesive: the third paragraph of the Standard Specifications is hereby deleted:

1007-8 Durability Requirements: the second and third paragraphs of the Standard Specifications are revised to read:

Sheeting shall be weather-tested as specified above in Subsection 1007-7. Sheeting weather-testing periods and durability ratings shall be as specified in Table 1007-8. In all cases, the related inks and films shall be tested along with the respective sheeting, and shall be subject to the same durability requirements as the sheeting.

TABLE 1007-8			
ASTM Sheeting Type	Color	Weather-testing period, months	Durability rating, years
XI	Fluorescent yellow	42	7
XI	Fluorescent orange	18	3
XI	All other colors	60	10
IX	Fluorescent orange	18	3
IX	All other colors	60	10
VIII	Fluorescent orange	18	3
VIII	All other colors	30	5
VI	Fluorescent orange	18	3
IV	All colors	30	5
I	All colors	30	5

(1010PIPE, 05/03/16)

SECTION 1010 DRAINAGE PIPE:

1010-3 Slotted Pipe: the last paragraph of the Standard Specifications is revised to read:

Grout shall consist of Portland cement, aggregate, and water. It may also contain supplementary cementitious material. Portland cement, aggregate, water, and supplementary cementitious material shall conform to the requirements of Section 1006. If approved by the Engineer, chemical admixtures may be used. Chemical admixtures shall conform to the requirements of Subsection 1006-2.04, except no admixtures containing chlorides or nitrates shall be used. Air-entraining admixtures, conforming to the requirements of Subsection 1006-2.04, will be required for grout placed at elevations of 3000 feet or above.

The grout shall meet the requirements given in the table below.

Minimum Cementitious Material Content: Lbs per CY (See Note 1)	Maximum Water/Cementitious Material Ratio (w/cm): Lb./Lb.	Slump: Inches (See Note 2)	Air Content: Percent (See Note 3)
850	0.60	9 ± 2	0 – 8
Note 1: A maximum of 25 percent of the cementitious material, by weight, may consist of an approved Class F fly ash, conforming to the requirements of ASTM C 618.			
Note 2: The consistency of the grout shall be as approved by the Engineer.			
Note 3: For placement of grout at elevations of 3000 feet or above, the air content shall be a minimum of 4 percent and a maximum of 8 percent.			

The aggregate shall consist of fine aggregate; however, at the option of the contractor, No. 8 coarse aggregate may be used in the grout. If No. 8 coarse aggregate is used, the volume shall be a maximum of 35 percent of the total aggregate volume.

For plant-mixed grout, the proportioning, mixing, and placing shall be in accordance with the applicable requirements in Section 1006.

For on-site mixing, grout that has been mixed more than one hour shall not be used.

Re-tempering of grout will not be permitted.

1010-8 Corrugated High Density Polyethylene Plastic Pipe: the title and the first paragraph of the Standard Specifications are revised to read:

1010-8 Corrugated High Density Polyethylene Plastic Pipe, Steel Reinforced High Density Thermoplastic Ribbed Pipe, and Corrugated Polypropylene Plastic Pipe:

Corrugated high density polyethylene plastic pipe, fittings, couplings and ends, where specified, shall conform to the requirements of AASHTO M 252 for pipe sizes less than 12 inches in diameter and AASHTO M 294 for pipe sizes 12 to 60 inches in diameter.

Steel reinforced high density thermoplastic ribbed pipe and fittings shall conform to the requirements of ASTM F 2562.

Corrugated polypropylene plastic pipe and fittings for pipe sizes 12 to 60 inches in diameter shall conform to the requirements of AASHTO M 330 (Type C or S) and ASTM F 2881.


1010-8 Corrugated High Density Polyethylene Plastic Pipe, Steel Reinforced High Density Thermoplastic Ribbed Pipe, and Corrugated Polypropylene Plastic Pipe: the last paragraph of the Standard Specifications is revised to read:

Tracer wire, which is to be placed in the trench with the corrugated high density polyethylene plastic pipe, steel reinforced high density thermoplastic ribbed pipe, or corrugated polypropylene plastic pipe as an aid in location after burial, shall conform to the requirements of Subsection 104.15(B).

APPENDIX A

Subgrade Acceptance Chart

SUBGRADE ACCEPTANCE CHART

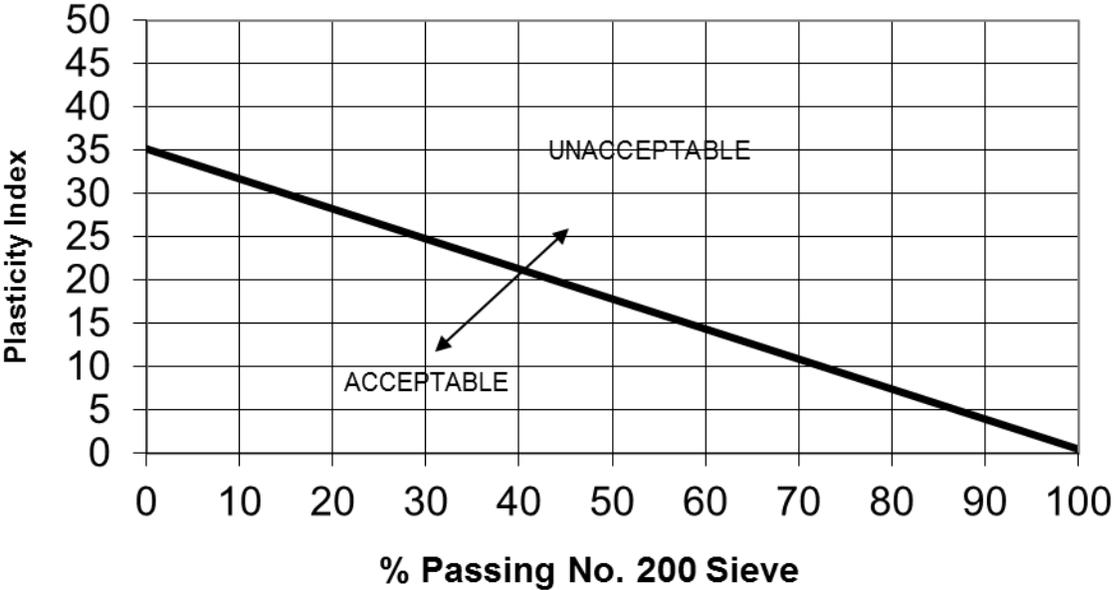

**REQUIRED CONTRACT PROVISIONS
FEDERAL-AID CONSTRUCTION CONTRACTS**

- I. General
- II. Nondiscrimination
- III. Nonsegregated Facilities
- IV. Davis-Bacon and Related Act Provisions
- V. Contract Work Hours and Safety Standards Act Provisions
- VI. Subletting or Assigning the Contract
- VII. Safety: Accident Prevention
- VIII. False Statements Concerning Highway Projects
- IX. Implementation of Clean Air Act and Federal Water Pollution Control Act
- X. Compliance with Governmentwide Suspension and Debarment Requirements
- XI. Certification Regarding Use of Contract Funds for Lobbying

ATTACHMENTS

A. Employment and Materials Preference for Appalachian Development Highway System or Appalachian Local Access Road Contracts (included in Appalachian contracts only)

I. GENERAL

1. Form FHWA-1273 must be physically incorporated in each construction contract funded under Title 23 (excluding emergency contracts solely intended for debris removal). The contractor (or subcontractor) must insert this form in each subcontract and further require its inclusion in all lower tier subcontracts (excluding purchase orders, rental agreements and other agreements for supplies or services).

The applicable requirements of Form FHWA-1273 are incorporated by reference for work done under any purchase order, rental agreement or agreement for other services. The prime contractor shall be responsible for compliance by any subcontractor, lower-tier subcontractor or service provider.

Form FHWA-1273 must be included in all Federal-aid design-build contracts, in all subcontracts and in lower tier subcontracts (excluding subcontracts for design services, purchase orders, rental agreements and other agreements for supplies or services). The design-builder shall be responsible for compliance by any subcontractor, lower-tier subcontractor or service provider.

Contracting agencies may reference Form FHWA-1273 in bid proposal or request for proposal documents, however, the Form FHWA-1273 must be physically incorporated (not referenced) in all contracts, subcontracts and lower-tier subcontracts (excluding purchase orders, rental agreements and other agreements for supplies or services related to a construction contract).

2. Subject to the applicability criteria noted in the following sections, these contract provisions shall apply to all work performed on the contract by the contractor's own organization and with the assistance of workers under the contractor's immediate superintendence and to all work performed on the contract by piecework, station work, or by subcontract.

3. A breach of any of the stipulations contained in these Required Contract Provisions may be sufficient grounds for withholding of progress payments, withholding of final payment, termination of the contract, suspension / debarment or any other action determined to be appropriate by the contracting agency and FHWA.

4. Selection of Labor: During the performance of this contract, the contractor shall not use convict labor for any purpose within the limits of a construction project on a Federal-aid highway unless it is labor performed by convicts who are on parole, supervised release, or probation. The term Federal-aid highway does not include roadways functionally classified as local roads or rural minor collectors.

II. NONDISCRIMINATION

The provisions of this section related to 23 CFR Part 230 are applicable to all Federal-aid construction contracts and to all related construction subcontracts of \$10,000 or more. The provisions of 23 CFR Part 230 are not applicable to material supply, engineering, or architectural service contracts.

In addition, the contractor and all subcontractors must comply with the following policies: Executive Order 11246, 41 CFR 60, 29 CFR 1625-1627, Title 23 USC Section 140, the Rehabilitation Act of 1973, as amended (29 USC 794), Title VI of the Civil Rights Act of 1964, as amended, and related regulations including 49 CFR Parts 21, 26 and 27; and 23 CFR Parts 200, 230, and 633.

The contractor and all subcontractors must comply with: the requirements of the Equal Opportunity Clause in 41 CFR 60-1.4(b) and, for all construction contracts exceeding \$10,000, the Standard Federal Equal Employment Opportunity Construction Contract Specifications in 41 CFR 60-4.3.

Note: The U.S. Department of Labor has exclusive authority to determine compliance with Executive Order 11246 and the policies of the Secretary of Labor including 41 CFR 60, and 29 CFR 1625-1627. The contracting agency and the FHWA have the authority and the responsibility to ensure compliance with Title 23 USC Section 140, the Rehabilitation Act of 1973, as amended (29 USC 794), and Title VI of the Civil Rights Act of 1964, as amended, and related regulations including 49 CFR Parts 21, 26 and 27; and 23 CFR Parts 200, 230, and 633.

The following provision is adopted from 23 CFR 230, Appendix A, with appropriate revisions to conform to the U.S. Department of Labor (US DOL) and FHWA requirements.

1. Equal Employment Opportunity: Equal employment opportunity (EEO) requirements not to discriminate and to take affirmative action to assure equal opportunity as set forth under laws, executive orders, rules, regulations (28 CFR 35, 29 CFR 1630, 29 CFR 1625-1627, 41 CFR 60 and 49 CFR 27) and orders of the Secretary of Labor as modified by the provisions prescribed herein, and imposed pursuant to 23 U.S.C. 140 shall constitute the EEO and specific affirmative action standards for the contractor's project activities under

this contract. The provisions of the Americans with Disabilities Act of 1990 (42 U.S.C. 12101 et seq.) set forth under 28 CFR 35 and 29 CFR 1630 are incorporated by reference in this contract. In the execution of this contract, the contractor agrees to comply with the following minimum specific requirement activities of EEO:

a. The contractor will work with the contracting agency and the Federal Government to ensure that it has made every good faith effort to provide equal opportunity with respect to all of its terms and conditions of employment and in their review of activities under the contract.

b. The contractor will accept as its operating policy the following statement:

"It is the policy of this Company to assure that applicants are employed, and that employees are treated during employment, without regard to their race, religion, sex, color, national origin, age or disability. Such action shall include: employment, upgrading, demotion, or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship, pre-apprenticeship, and/or on-the-job training."

2. EEO Officer: The contractor will designate and make known to the contracting officers an EEO Officer who will have the responsibility for and must be capable of effectively administering and promoting an active EEO program and who must be assigned adequate authority and responsibility to do so.

3. Dissemination of Policy: All members of the contractor's staff who are authorized to hire, supervise, promote, and discharge employees, or who recommend such action, or who are substantially involved in such action, will be made fully cognizant of, and will implement, the contractor's EEO policy and contractual responsibilities to provide EEO in each grade and classification of employment. To ensure that the above agreement will be met, the following actions will be taken as a minimum:

a. Periodic meetings of supervisory and personnel office employees will be conducted before the start of work and then not less often than once every six months, at which time the contractor's EEO policy and its implementation will be reviewed and explained. The meetings will be conducted by the EEO Officer.

b. All new supervisory or personnel office employees will be given a thorough indoctrination by the EEO Officer, covering all major aspects of the contractor's EEO obligations within thirty days following their reporting for duty with the contractor.

c. All personnel who are engaged in direct recruitment for the project will be instructed by the EEO Officer in the contractor's procedures for locating and hiring minorities and women.

d. Notices and posters setting forth the contractor's EEO policy will be placed in areas readily accessible to employees, applicants for employment and potential employees.

e. The contractor's EEO policy and the procedures to implement such policy will be brought to the attention of employees by means of meetings, employee handbooks, or other appropriate means.

4. Recruitment: When advertising for employees, the contractor will include in all advertisements for employees the notation: "An Equal Opportunity Employer." All such advertisements will be placed in publications having a large circulation among minorities and women in the area from which the project work force would normally be derived.

a. The contractor will, unless precluded by a valid bargaining agreement, conduct systematic and direct recruitment through public and private employee referral sources likely to yield qualified minorities and women. To meet this requirement, the contractor will identify sources of potential minority group employees, and establish with such identified sources procedures whereby minority and women applicants may be referred to the contractor for employment consideration.

b. In the event the contractor has a valid bargaining agreement providing for exclusive hiring hall referrals, the contractor is expected to observe the provisions of that agreement to the extent that the system meets the contractor's compliance with EEO contract provisions. Where implementation of such an agreement has the effect of discriminating against minorities or women, or obligates the contractor to do the same, such implementation violates Federal nondiscrimination provisions.

c. The contractor will encourage its present employees to refer minorities and women as applicants for employment. Information and procedures with regard to referring such applicants will be discussed with employees.

5. Personnel Actions: Wages, working conditions, and employee benefits shall be established and administered, and personnel actions of every type, including hiring, upgrading, promotion, transfer, demotion, layoff, and termination, shall be taken without regard to race, color, religion, sex, national origin, age or disability. The following procedures shall be followed:

a. The contractor will conduct periodic inspections of project sites to insure that working conditions and employee facilities do not indicate discriminatory treatment of project site personnel.

b. The contractor will periodically evaluate the spread of wages paid within each classification to determine any evidence of discriminatory wage practices.

c. The contractor will periodically review selected personnel actions in depth to determine whether there is evidence of discrimination. Where evidence is found, the contractor will promptly take corrective action. If the review indicates that the discrimination may extend beyond the actions reviewed, such corrective action shall include all affected persons.

d. The contractor will promptly investigate all complaints of alleged discrimination made to the contractor in connection with its obligations under this contract, will attempt to resolve such complaints, and will take appropriate corrective action within a reasonable time. If the investigation indicates that the discrimination may affect persons other than the complainant, such corrective action shall include such other persons. Upon completion of each investigation, the contractor will inform every complainant of all of their avenues of appeal.

6. Training and Promotion:

a. The contractor will assist in locating, qualifying, and increasing the skills of minorities and women who are

applicants for employment or current employees. Such efforts should be aimed at developing full journey level status employees in the type of trade or job classification involved.

b. Consistent with the contractor's work force requirements and as permissible under Federal and State regulations, the contractor shall make full use of training programs, i.e., apprenticeship, and on-the-job training programs for the geographical area of contract performance. In the event a special provision for training is provided under this contract, this subparagraph will be superseded as indicated in the special provision. The contracting agency may reserve training positions for persons who receive welfare assistance in accordance with 23 U.S.C. 140(a).

c. The contractor will advise employees and applicants for employment of available training programs and entrance requirements for each.

d. The contractor will periodically review the training and promotion potential of employees who are minorities and women and will encourage eligible employees to apply for such training and promotion.

7. Unions: If the contractor relies in whole or in part upon unions as a source of employees, the contractor will use good faith efforts to obtain the cooperation of such unions to increase opportunities for minorities and women. Actions by the contractor, either directly or through a contractor's association acting as agent, will include the procedures set forth below:

a. The contractor will use good faith efforts to develop, in cooperation with the unions, joint training programs aimed toward qualifying more minorities and women for membership in the unions and increasing the skills of minorities and women so that they may qualify for higher paying employment.

b. The contractor will use good faith efforts to incorporate an EEO clause into each union agreement to the end that such union will be contractually bound to refer applicants without regard to their race, color, religion, sex, national origin, age or disability.

c. The contractor is to obtain information as to the referral practices and policies of the labor union except that to the extent such information is within the exclusive possession of the labor union and such labor union refuses to furnish such information to the contractor, the contractor shall so certify to the contracting agency and shall set forth what efforts have been made to obtain such information.

d. In the event the union is unable to provide the contractor with a reasonable flow of referrals within the time limit set forth in the collective bargaining agreement, the contractor will, through independent recruitment efforts, fill the employment vacancies without regard to race, color, religion, sex, national origin, age or disability; making full efforts to obtain qualified and/or qualifiable minorities and women. The failure of a union to provide sufficient referrals (even though it is obligated to provide exclusive referrals under the terms of a collective bargaining agreement) does not relieve the contractor from the requirements of this paragraph. In the event the union referral practice prevents the contractor from meeting the obligations pursuant to Executive Order 11246, as amended, and these special provisions, such contractor shall immediately notify the contracting agency.

8. Reasonable Accommodation for Applicants / Employees with Disabilities: The contractor must be familiar

with the requirements for and comply with the Americans with Disabilities Act and all rules and regulations established there under. Employers must provide reasonable accommodation in all employment activities unless to do so would cause an undue hardship.

9. Selection of Subcontractors, Procurement of Materials and Leasing of Equipment: The contractor shall not discriminate on the grounds of race, color, religion, sex, national origin, age or disability in the selection and retention of subcontractors, including procurement of materials and leases of equipment. The contractor shall take all necessary and reasonable steps to ensure nondiscrimination in the administration of this contract.

a. The contractor shall notify all potential subcontractors and suppliers and lessors of their EEO obligations under this contract.

b. The contractor will use good faith efforts to ensure subcontractor compliance with their EEO obligations.

10. Assurance Required by 49 CFR 26.13(b):

a. The requirements of 49 CFR Part 26 and the State DOT's U.S. DOT-approved DBE program are incorporated by reference.

b. The contractor or subcontractor shall not discriminate on the basis of race, color, national origin, or sex in the performance of this contract. The contractor shall carry out applicable requirements of 49 CFR Part 26 in the award and administration of DOT-assisted contracts. Failure by the contractor to carry out these requirements is a material breach of this contract, which may result in the termination of this contract or such other remedy as the contracting agency deems appropriate.

11. Records and Reports: The contractor shall keep such records as necessary to document compliance with the EEO requirements. Such records shall be retained for a period of three years following the date of the final payment to the contractor for all contract work and shall be available at reasonable times and places for inspection by authorized representatives of the contracting agency and the FHWA.

a. The records kept by the contractor shall document the following:

(1) The number and work hours of minority and non-minority group members and women employed in each work classification on the project;

(2) The progress and efforts being made in cooperation with unions, when applicable, to increase employment opportunities for minorities and women; and

(3) The progress and efforts being made in locating, hiring, training, qualifying, and upgrading minorities and women;

b. The contractors and subcontractors will submit an annual report to the contracting agency each July for the duration of the project, indicating the number of minority, women, and non-minority group employees currently engaged in each work classification required by the contract work. This information is to be reported on Form FHWA-1391. The staffing data should represent the project work force on board in all or any part of the last payroll period preceding the end of July. If on-the-job training is being required by special provision, the contractor

will be required to collect and report training data. The employment data should reflect the work force on board during all or any part of the last payroll period preceding the end of July.

III. NONSEGREGATED FACILITIES

This provision is applicable to all Federal-aid construction contracts and to all related construction subcontracts of \$10,000 or more.

The contractor must ensure that facilities provided for employees are provided in such a manner that segregation on the basis of race, color, religion, sex, or national origin cannot result. The contractor may neither require such segregated use by written or oral policies nor tolerate such use by employee custom. The contractor's obligation extends further to ensure that its employees are not assigned to perform their services at any location, under the contractor's control, where the facilities are segregated. The term "facilities" includes waiting rooms, work areas, restaurants and other eating areas, time clocks, restrooms, washrooms, locker rooms, and other storage or dressing areas, parking lots, drinking fountains, recreation or entertainment areas, transportation, and housing provided for employees. The contractor shall provide separate or single-user restrooms and necessary dressing or sleeping areas to assure privacy between sexes.

IV. DAVIS-BACON AND RELATED ACT PROVISIONS

This section is applicable to all Federal-aid construction projects exceeding \$2,000 and to all related subcontracts and lower-tier subcontracts (regardless of subcontract size). The requirements apply to all projects located within the right-of-way of a roadway that is functionally classified as Federal-aid highway. This excludes roadways functionally classified as local roads or rural minor collectors, which are exempt. Contracting agencies may elect to apply these requirements to other projects.

The following provisions are from the U.S. Department of Labor regulations in 29 CFR 5.5 "Contract provisions and related matters" with minor revisions to conform to the FHWA-1273 format and FHWA program requirements.

1. Minimum wages

a. All laborers and mechanics employed or working upon the site of the work, will be paid unconditionally and not less often than once a week, and without subsequent deduction or rebate on any account (except such payroll deductions as are permitted by regulations issued by the Secretary of Labor under the Copeland Act (29 CFR part 3)), the full amount of wages and bona fide fringe benefits (or cash equivalents thereof) due at time of payment computed at rates not less than those contained in the wage determination of the Secretary of Labor which is attached hereto and made a part hereof, regardless of any contractual relationship which may be alleged to exist between the contractor and such laborers and mechanics.

Contributions made or costs reasonably anticipated for bona fide fringe benefits under section 1(b)(2) of the Davis-Bacon Act on behalf of laborers or mechanics are considered wages paid to such laborers or mechanics, subject to the provisions

of paragraph 1.d. of this section; also, regular contributions made or costs incurred for more than a weekly period (but not less often than quarterly) under plans, funds, or programs which cover the particular weekly period, are deemed to be constructively made or incurred during such weekly period. Such laborers and mechanics shall be paid the appropriate wage rate and fringe benefits on the wage determination for the classification of work actually performed, without regard to skill, except as provided in 29 CFR 5.5(a)(4). Laborers or mechanics performing work in more than one classification may be compensated at the rate specified for each classification for the time actually worked therein: Provided, That the employer's payroll records accurately set forth the time spent in each classification in which work is performed. The wage determination (including any additional classification and wage rates conformed under paragraph 1.b. of this section) and the Davis-Bacon poster (WH-1321) shall be posted at all times by the contractor and its subcontractors at the site of the work in a prominent and accessible place where it can be easily seen by the workers.

b.(1) The contracting officer shall require that any class of laborers or mechanics, including helpers, which is not listed in the wage determination and which is to be employed under the contract shall be classified in conformance with the wage determination. The contracting officer shall approve an additional classification and wage rate and fringe benefits therefore only when the following criteria have been met:

(i) The work to be performed by the classification requested is not performed by a classification in the wage determination; and

(ii) The classification is utilized in the area by the construction industry; and

(iii) The proposed wage rate, including any bona fide fringe benefits, bears a reasonable relationship to the wage rates contained in the wage determination.

(2) If the contractor and the laborers and mechanics to be employed in the classification (if known), or their representatives, and the contracting officer agree on the classification and wage rate (including the amount designated for fringe benefits where appropriate), a report of the action taken shall be sent by the contracting officer to the Administrator of the Wage and Hour Division, Employment Standards Administration, U.S. Department of Labor, Washington, DC 20210. The Administrator, or an authorized representative, will approve, modify, or disapprove every additional classification action within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary.

(3) In the event the contractor, the laborers or mechanics to be employed in the classification or their representatives, and the contracting officer do not agree on the proposed classification and wage rate (including the amount designated for fringe benefits, where appropriate), the contracting officer shall refer the questions, including the views of all interested parties and the recommendation of the contracting officer, to the Wage and Hour Administrator for determination. The Wage and Hour Administrator, or an authorized representative, will issue a determination within 30 days of receipt and so advise the contracting officer or

will notify the contracting officer within the 30-day period that additional time is necessary.

(4) The wage rate (including fringe benefits where appropriate) determined pursuant to paragraphs 1.b.(2) or 1.b.(3) of this section, shall be paid to all workers performing work in the classification under this contract from the first day on which work is performed in the classification.

c. Whenever the minimum wage rate prescribed in the contract for a class of laborers or mechanics includes a fringe benefit which is not expressed as an hourly rate, the contractor shall either pay the benefit as stated in the wage determination or shall pay another bona fide fringe benefit or an hourly cash equivalent thereof.

d. If the contractor does not make payments to a trustee or other third person, the contractor may consider as part of the wages of any laborer or mechanic the amount of any costs reasonably anticipated in providing bona fide fringe benefits under a plan or program, Provided, That the Secretary of Labor has found, upon the written request of the contractor, that the applicable standards of the Davis-Bacon Act have been met. The Secretary of Labor may require the contractor to set aside in a separate account assets for the meeting of obligations under the plan or program.

2. Withholding

The contracting agency shall upon its own action or upon written request of an authorized representative of the Department of Labor, withhold or cause to be withheld from the contractor under this contract, or any other Federal contract with the same prime contractor, or any other federally-assisted contract subject to Davis-Bacon prevailing wage requirements, which is held by the same prime contractor, so much of the accrued payments or advances as may be considered necessary to pay laborers and mechanics, including apprentices, trainees, and helpers, employed by the contractor or any subcontractor the full amount of wages required by the contract. In the event of failure to pay any laborer or mechanic, including any apprentice, trainee, or helper, employed or working on the site of the work, all or part of the wages required by the contract, the contracting agency may, after written notice to the contractor, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds until such violations have ceased.

3. Payrolls and basic records

a. Payrolls and basic records relating thereto shall be maintained by the contractor during the course of the work and preserved for a period of three years thereafter for all laborers and mechanics working at the site of the work. Such records shall contain the name, address, and social security number of each such worker, his or her correct classification, hourly rates of wages paid (including rates of contributions or costs anticipated for bona fide fringe benefits or cash equivalents thereof of the types described in section 1(b)(2)(B) of the Davis-Bacon Act), daily and weekly number of hours worked, deductions made and actual wages paid. Whenever the Secretary of Labor has found under 29 CFR 5.5(a)(1)(iv) that the wages of any laborer or mechanic include the amount of any costs reasonably anticipated in providing benefits under a plan or program described in section 1(b)(2)(B) of the Davis-

Bacon Act, the contractor shall maintain records which show that the commitment to provide such benefits is enforceable, that the plan or program is financially responsible, and that the plan or program has been communicated in writing to the laborers or mechanics affected, and records which show the costs anticipated or the actual cost incurred in providing such benefits. Contractors employing apprentices or trainees under approved programs shall maintain written evidence of the registration of apprenticeship programs and certification of trainee programs, the registration of the apprentices and trainees, and the ratios and wage rates prescribed in the applicable programs.

b.(1) The contractor shall submit weekly for each week in which any contract work is performed a copy of all payrolls to the contracting agency. The payrolls submitted shall set out accurately and completely all of the information required to be maintained under 29 CFR 5.5(a)(3)(i), except that full social security numbers and home addresses shall not be included on weekly transmittals. Instead the payrolls shall only need to include an individually identifying number for each employee (e.g., the last four digits of the employee's social security number). The required weekly payroll information may be submitted in any form desired. Optional Form WH-347 is available for this purpose from the Wage and Hour Division Web site at <http://www.dol.gov/esa/whd/forms/wh347instr.htm> or its successor site. The prime contractor is responsible for the submission of copies of payrolls by all subcontractors. Contractors and subcontractors shall maintain the full social security number and current address of each covered worker, and shall provide them upon request to the contracting agency for transmission to the State DOT, the FHWA or the Wage and Hour Division of the Department of Labor for purposes of an investigation or audit of compliance with prevailing wage requirements. It is not a violation of this section for a prime contractor to require a subcontractor to provide addresses and social security numbers to the prime contractor for its own records, without weekly submission to the contracting agency..

(2) Each payroll submitted shall be accompanied by a "Statement of Compliance," signed by the contractor or subcontractor or his or her agent who pays or supervises the payment of the persons employed under the contract and shall certify the following:

(i) That the payroll for the payroll period contains the information required to be provided under §5.5 (a)(3)(ii) of Regulations, 29 CFR part 5, the appropriate information is being maintained under §5.5 (a)(3)(i) of Regulations, 29 CFR part 5, and that such information is correct and complete;

(ii) That each laborer or mechanic (including each helper, apprentice, and trainee) employed on the contract during the payroll period has been paid the full weekly wages earned, without rebate, either directly or indirectly, and that no deductions have been made either directly or indirectly from the full wages earned, other than permissible deductions as set forth in Regulations, 29 CFR part 3;

(iii) That each laborer or mechanic has been paid not less than the applicable wage rates and fringe benefits or cash equivalents for the classification of work performed, as specified in the applicable wage determination incorporated into the contract.

(3) The weekly submission of a properly executed certification set forth on the reverse side of Optional Form WH-347 shall satisfy the requirement for submission of the "Statement of Compliance" required by paragraph 3.b.(2) of this section.

(4) The falsification of any of the above certifications may subject the contractor or subcontractor to civil or criminal prosecution under section 1001 of title 18 and section 231 of title 31 of the United States Code.

c. The contractor or subcontractor shall make the records required under paragraph 3.a. of this section available for inspection, copying, or transcription by authorized representatives of the contracting agency, the State DOT, the FHWA, or the Department of Labor, and shall permit such representatives to interview employees during working hours on the job. If the contractor or subcontractor fails to submit the required records or to make them available, the FHWA may, after written notice to the contractor, the contracting agency or the State DOT, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds. Furthermore, failure to submit the required records upon request or to make such records available may be grounds for debarment action pursuant to 29 CFR 5.12.

4. Apprentices and trainees

a. Apprentices (programs of the USDOL).

Apprentices will be permitted to work at less than the predetermined rate for the work they performed when they are employed pursuant to and individually registered in a bona fide apprenticeship program registered with the U.S. Department of Labor, Employment and Training Administration, Office of Apprenticeship Training, Employer and Labor Services, or with a State Apprenticeship Agency recognized by the Office, or if a person is employed in his or her first 90 days of probationary employment as an apprentice in such an apprenticeship program, who is not individually registered in the program, but who has been certified by the Office of Apprenticeship Training, Employer and Labor Services or a State Apprenticeship Agency (where appropriate) to be eligible for probationary employment as an apprentice.

The allowable ratio of apprentices to journeymen on the job site in any craft classification shall not be greater than the ratio permitted to the contractor as to the entire work force under the registered program. Any worker listed on a payroll at an apprentice wage rate, who is not registered or otherwise employed as stated above, shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any apprentice performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed. Where a contractor is performing construction on a project in a locality other than that in which its program is registered, the ratios and wage rates (expressed in percentages of the journeyman's hourly rate) specified in the contractor's or subcontractor's registered program shall be observed.

Every apprentice must be paid at not less than the rate specified in the registered program for the apprentice's level of progress, expressed as a percentage of the journeymen hourly

rate specified in the applicable wage determination. Apprentices shall be paid fringe benefits in accordance with the provisions of the apprenticeship program. If the apprenticeship program does not specify fringe benefits, apprentices must be paid the full amount of fringe benefits listed on the wage determination for the applicable classification. If the Administrator determines that a different practice prevails for the applicable apprentice classification, fringes shall be paid in accordance with that determination.

In the event the Office of Apprenticeship Training, Employer and Labor Services, or a State Apprenticeship Agency recognized by the Office, withdraws approval of an apprenticeship program, the contractor will no longer be permitted to utilize apprentices at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

b. Trainees (programs of the USDOL).

Except as provided in 29 CFR 5.16, trainees will not be permitted to work at less than the predetermined rate for the work performed unless they are employed pursuant to and individually registered in a program which has received prior approval, evidenced by formal certification by the U.S. Department of Labor, Employment and Training Administration.

The ratio of trainees to journeymen on the job site shall not be greater than permitted under the plan approved by the Employment and Training Administration.

Every trainee must be paid at not less than the rate specified in the approved program for the trainee's level of progress, expressed as a percentage of the journeyman hourly rate specified in the applicable wage determination. Trainees shall be paid fringe benefits in accordance with the provisions of the trainee program. If the trainee program does not mention fringe benefits, trainees shall be paid the full amount of fringe benefits listed on the wage determination unless the Administrator of the Wage and Hour Division determines that there is an apprenticeship program associated with the corresponding journeyman wage rate on the wage determination which provides for less than full fringe benefits for apprentices. Any employee listed on the payroll at a trainee rate who is not registered and participating in a training plan approved by the Employment and Training Administration shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any trainee performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed.

In the event the Employment and Training Administration withdraws approval of a training program, the contractor will no longer be permitted to utilize trainees at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

c. Equal employment opportunity. The utilization of apprentices, trainees and journeymen under this part shall be in conformity with the equal employment opportunity requirements of Executive Order 11246, as amended, and 29 CFR part 30.

d. Apprentices and Trainees (programs of the U.S. DOT).

Apprentices and trainees working under apprenticeship and skill training programs which have been certified by the Secretary of Transportation as promoting EEO in connection with Federal-aid highway construction programs are not subject to the requirements of paragraph 4 of this Section IV. The straight time hourly wage rates for apprentices and trainees under such programs will be established by the particular programs. The ratio of apprentices and trainees to journeymen shall not be greater than permitted by the terms of the particular program.

5. Compliance with Copeland Act requirements. The contractor shall comply with the requirements of 29 CFR part 3, which are incorporated by reference in this contract.

6. Subcontracts. The contractor or subcontractor shall insert Form FHWA-1273 in any subcontracts and also require the subcontractors to include Form FHWA-1273 in any lower tier subcontracts. The prime contractor shall be responsible for the compliance by any subcontractor or lower tier subcontractor with all the contract clauses in 29 CFR 5.5.

7. Contract termination; debarment. A breach of the contract clauses in 29 CFR 5.5 may be grounds for termination of the contract, and for debarment as a contractor and a subcontractor as provided in 29 CFR 5.12.

8. Compliance with Davis-Bacon and Related Act requirements. All rulings and interpretations of the Davis-Bacon and Related Acts contained in 29 CFR parts 1, 3, and 5 are herein incorporated by reference in this contract.

9. Disputes concerning labor standards. Disputes arising out of the labor standards provisions of this contract shall not be subject to the general disputes clause of this contract. Such disputes shall be resolved in accordance with the procedures of the Department of Labor set forth in 29 CFR parts 5, 6, and 7. Disputes within the meaning of this clause include disputes between the contractor (or any of its subcontractors) and the contracting agency, the U.S. Department of Labor, or the employees or their representatives.

10. Certification of eligibility.

a. By entering into this contract, the contractor certifies that neither it (nor he or she) nor any person or firm who has an interest in the contractor's firm is a person or firm ineligible to be awarded Government contracts by virtue of section 3(a) of the Davis-Bacon Act or 29 CFR 5.12(a)(1).

b. No part of this contract shall be subcontracted to any person or firm ineligible for award of a Government contract by virtue of section 3(a) of the Davis-Bacon Act or 29 CFR 5.12(a)(1).

c. The penalty for making false statements is prescribed in the U.S. Criminal Code, 18 U.S.C. 1001.

V. CONTRACT WORK HOURS AND SAFETY STANDARDS ACT

The following clauses apply to any Federal-aid construction contract in an amount in excess of \$100,000 and subject to the overtime provisions of the Contract Work Hours and Safety Standards Act. These clauses shall be inserted in addition to the clauses required by 29 CFR 5.5(a) or 29 CFR 4.6. As used in this paragraph, the terms laborers and mechanics include watchmen and guards.

1. Overtime requirements. No contractor or subcontractor contracting for any part of the contract work which may require or involve the employment of laborers or mechanics shall require or permit any such laborer or mechanic in any workweek in which he or she is employed on such work to work in excess of forty hours in such workweek unless such laborer or mechanic receives compensation at a rate not less than one and one-half times the basic rate of pay for all hours worked in excess of forty hours in such workweek.

2. Violation; liability for unpaid wages; liquidated damages. In the event of any violation of the clause set forth in paragraph (1.) of this section, the contractor and any subcontractor responsible therefor shall be liable for the unpaid wages. In addition, such contractor and subcontractor shall be liable to the United States (in the case of work done under contract for the District of Columbia or a territory, to such District or to such territory), for liquidated damages. Such liquidated damages shall be computed with respect to each individual laborer or mechanic, including watchmen and guards, employed in violation of the clause set forth in paragraph (1.) of this section, in the sum of \$10 for each calendar day on which such individual was required or permitted to work in excess of the standard workweek of forty hours without payment of the overtime wages required by the clause set forth in paragraph (1.) of this section.

3. Withholding for unpaid wages and liquidated damages. The FHWA or the contracting agency shall upon its own action or upon written request of an authorized representative of the Department of Labor withhold or cause to be withheld, from any moneys payable on account of work performed by the contractor or subcontractor under any such contract or any other Federal contract with the same prime contractor, or any other federally-assisted contract subject to the Contract Work Hours and Safety Standards Act, which is held by the same prime contractor, such sums as may be determined to be necessary to satisfy any liabilities of such contractor or subcontractor for unpaid wages and liquidated damages as provided in the clause set forth in paragraph (2.) of this section.

4. Subcontracts. The contractor or subcontractor shall insert in any subcontracts the clauses set forth in paragraph (1.) through (4.) of this section and also a clause requiring the subcontractors to include these clauses in any lower tier subcontracts. The prime contractor shall be responsible for compliance by any subcontractor or lower tier subcontractor with the clauses set forth in paragraphs (1.) through (4.) of this section.

VI. SUBLETTING OR ASSIGNING THE CONTRACT

This provision is applicable to all Federal-aid construction contracts on the National Highway System.

1. The contractor shall perform with its own organization contract work amounting to not less than 30 percent (or a greater percentage if specified elsewhere in the contract) of the total original contract price, excluding any specialty items designated by the contracting agency. Specialty items may be performed by subcontract and the amount of any such specialty items performed may be deducted from the total original contract price before computing the amount of work required to be performed by the contractor's own organization (23 CFR 635.116).

a. The term "perform work with its own organization" refers to workers employed or leased by the prime contractor, and equipment owned or rented by the prime contractor, with or without operators. Such term does not include employees or equipment of a subcontractor or lower tier subcontractor, agents of the prime contractor, or any other assignees. The term may include payments for the costs of hiring leased employees from an employee leasing firm meeting all relevant Federal and State regulatory requirements. Leased employees may only be included in this term if the prime contractor meets all of the following conditions:

- (1) the prime contractor maintains control over the supervision of the day-to-day activities of the leased employees;
- (2) the prime contractor remains responsible for the quality of the work of the leased employees;
- (3) the prime contractor retains all power to accept or exclude individual employees from work on the project; and
- (4) the prime contractor remains ultimately responsible for the payment of predetermined minimum wages, the submission of payrolls, statements of compliance and all other Federal regulatory requirements.

b. "Specialty Items" shall be construed to be limited to work that requires highly specialized knowledge, abilities, or equipment not ordinarily available in the type of contracting organizations qualified and expected to bid or propose on the contract as a whole and in general are to be limited to minor components of the overall contract.

2. The contract amount upon which the requirements set forth in paragraph (1) of Section VI is computed includes the cost of material and manufactured products which are to be purchased or produced by the contractor under the contract provisions.

3. The contractor shall furnish (a) a competent superintendent or supervisor who is employed by the firm, has full authority to direct performance of the work in accordance with the contract requirements, and is in charge of all construction operations (regardless of who performs the work) and (b) such other of its own organizational resources (supervision, management, and engineering services) as the contracting officer determines is necessary to assure the performance of the contract.

4. No portion of the contract shall be sublet, assigned or otherwise disposed of except with the written consent of the contracting officer, or authorized representative, and such consent when given shall not be construed to relieve the contractor of any responsibility for the fulfillment of the contract. Written consent will be given only after the contracting agency has assured that each subcontract is

evidenced in writing and that it contains all pertinent provisions and requirements of the prime contract.

5. The 30% self-performance requirement of paragraph (1) is not applicable to design-build contracts; however, contracting agencies may establish their own self-performance requirements.

VII. SAFETY: ACCIDENT PREVENTION

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

1. In the performance of this contract the contractor shall comply with all applicable Federal, State, and local laws governing safety, health, and sanitation (23 CFR 635). The contractor shall provide all safeguards, safety devices and protective equipment and take any other needed actions as it determines, or as the contracting officer may determine, to be reasonably necessary to protect the life and health of employees on the job and the safety of the public and to protect property in connection with the performance of the work covered by the contract.

2. It is a condition of this contract, and shall be made a condition of each subcontract, which the contractor enters into pursuant to this contract, that the contractor and any subcontractor shall not permit any employee, in performance of the contract, to work in surroundings or under conditions which are unsanitary, hazardous or dangerous to his/her health or safety, as determined under construction safety and health standards (29 CFR 1926) promulgated by the Secretary of Labor, in accordance with Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C. 3704).

3. Pursuant to 29 CFR 1926.3, it is a condition of this contract that the Secretary of Labor or authorized representative thereof, shall have right of entry to any site of contract performance to inspect or investigate the matter of compliance with the construction safety and health standards and to carry out the duties of the Secretary under Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C.3704).

VIII. FALSE STATEMENTS CONCERNING HIGHWAY PROJECTS

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

In order to assure high quality and durable construction in conformity with approved plans and specifications and a high degree of reliability on statements and representations made by engineers, contractors, suppliers, and workers on Federal-aid highway projects, it is essential that all persons concerned with the project perform their functions as carefully, thoroughly, and honestly as possible. Willful falsification, distortion, or misrepresentation with respect to any facts related to the project is a violation of Federal law. To prevent any misunderstanding regarding the seriousness of these and similar acts, Form FHWA-1022 shall be posted on each Federal-aid highway project (23 CFR 635) in one or more places where it is readily available to all persons concerned with the project:

18 U.S.C. 1020 reads as follows:

"Whoever, being an officer, agent, or employee of the United States, or of any State or Territory, or whoever, whether a person, association, firm, or corporation, knowingly makes any false statement, false representation, or false report as to the character, quality, quantity, or cost of the material used or to be used, or the quantity or quality of the work performed or to be performed, or the cost thereof in connection with the submission of plans, maps, specifications, contracts, or costs of construction on any highway or related project submitted for approval to the Secretary of Transportation; or

Whoever knowingly makes any false statement, false representation, false report or false claim with respect to the character, quality, quantity, or cost of any work performed or to be performed, or materials furnished or to be furnished, in connection with the construction of any highway or related project approved by the Secretary of Transportation; or

Whoever knowingly makes any false statement or false representation as to material fact in any statement, certificate, or report submitted pursuant to provisions of the Federal-aid Roads Act approved July 1, 1916, (39 Stat. 355), as amended and supplemented;

Shall be fined under this title or imprisoned not more than 5 years or both."

IX. IMPLEMENTATION OF CLEAN AIR ACT AND FEDERAL WATER POLLUTION CONTROL ACT

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

By submission of this bid/proposal or the execution of this contract, or subcontract, as appropriate, the bidder, proposer, Federal-aid construction contractor, or subcontractor, as appropriate, will be deemed to have stipulated as follows:

1. That any person who is or will be utilized in the performance of this contract is not prohibited from receiving an award due to a violation of Section 508 of the Clean Water Act or Section 306 of the Clean Air Act.

2. That the contractor agrees to include or cause to be included the requirements of paragraph (1) of this Section X in every subcontract, and further agrees to take such action as the contracting agency may direct as a means of enforcing such requirements.

X. CERTIFICATION REGARDING DEBARMENT, SUSPENSION, INELIGIBILITY AND VOLUNTARY EXCLUSION

This provision is applicable to all Federal-aid construction contracts, design-build contracts, subcontracts, lower-tier subcontracts, purchase orders, lease agreements, consultant contracts or any other covered transaction requiring FHWA approval or that is estimated to cost \$25,000 or more — as defined in 2 CFR Parts 180 and 1200.

1. Instructions for Certification – First Tier Participants:

a. By signing and submitting this proposal, the prospective first tier participant is providing the certification set out below.

b. The inability of a person to provide the certification set out below will not necessarily result in denial of participation in this

covered transaction. The prospective first tier participant shall submit an explanation of why it cannot provide the certification set out below. The certification or explanation will be considered in connection with the department or agency's determination whether to enter into this transaction. However, failure of the prospective first tier participant to furnish a certification or an explanation shall disqualify such a person from participation in this transaction.

c. The certification in this clause is a material representation of fact upon which reliance was placed when the contracting agency determined to enter into this transaction. If it is later determined that the prospective participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the contracting agency may terminate this transaction for cause of default.

d. The prospective first tier participant shall provide immediate written notice to the contracting agency to whom this proposal is submitted if any time the prospective first tier participant learns that its certification was erroneous when submitted or has become erroneous by reason of changed circumstances.

e. The terms "covered transaction," "debarred," "suspended," "ineligible," "participant," "person," "principal," and "voluntarily excluded," as used in this clause, are defined in 2 CFR Parts 180 and 1200. "First Tier Covered Transactions" refers to any covered transaction between a grantee or subgrantee of Federal funds and a participant (such as the prime or general contract). "Lower Tier Covered Transactions" refers to any covered transaction under a First Tier Covered Transaction (such as subcontracts). "First Tier Participant" refers to the participant who has entered into a covered transaction with a grantee or subgrantee of Federal funds (such as the prime or general contractor). "Lower Tier Participant" refers any participant who has entered into a covered transaction with a First Tier Participant or other Lower Tier Participants (such as subcontractors and suppliers).

f. The prospective first tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency entering into this transaction.

g. The prospective first tier participant further agrees by submitting this proposal that it will include the clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transactions," provided by the department or contracting agency, entering into this covered transaction, without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions exceeding the \$25,000 threshold.

h. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant is responsible for ensuring that its principals are not suspended, debarred, or otherwise ineligible to participate in covered transactions. To verify the eligibility of its principals, as well as the eligibility of any lower tier prospective participants, each participant may, but is not required to, check the Excluded Parties List System website (<https://www.epls.gov/>), which is compiled by the General Services Administration.

i. Nothing contained in the foregoing shall be construed to require the establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of the prospective participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

j. Except for transactions authorized under paragraph (f) of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency may terminate this transaction for cause or default.

2. Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion – First Tier Participants:

a. The prospective first tier participant certifies to the best of its knowledge and belief, that it and its principals:

(1) Are not presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participating in covered transactions by any Federal department or agency;

(2) Have not within a three-year period preceding this proposal been convicted of or had a civil judgment rendered against them for commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or performing a public (Federal, State or local) transaction or contract under a public transaction; violation of Federal or State antitrust statutes or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records, making false statements, or receiving stolen property;

(3) Are not presently indicted for or otherwise criminally or civilly charged by a governmental entity (Federal, State or local) with commission of any of the offenses enumerated in paragraph (a)(2) of this certification; and

(4) Have not within a three-year period preceding this application/proposal had one or more public transactions (Federal, State or local) terminated for cause or default.

b. Where the prospective participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

2. Instructions for Certification - Lower Tier Participants:

(Applicable to all subcontracts, purchase orders and other lower tier transactions requiring prior FHWA approval or estimated to cost \$25,000 or more - 2 CFR Parts 180 and 1200)

a. By signing and submitting this proposal, the prospective lower tier is providing the certification set out below.

b. The certification in this clause is a material representation of fact upon which reliance was placed when this transaction was entered into. If it is later determined that the prospective lower tier participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the department, or agency with which

this transaction originated may pursue available remedies, including suspension and/or debarment.

c. The prospective lower tier participant shall provide immediate written notice to the person to which this proposal is submitted if at any time the prospective lower tier participant learns that its certification was erroneous by reason of changed circumstances.

d. The terms "covered transaction," "debarred," "suspended," "ineligible," "participant," "person," "principal," and "voluntarily excluded," as used in this clause, are defined in 2 CFR Parts 180 and 1200. You may contact the person to which this proposal is submitted for assistance in obtaining a copy of those regulations. "First Tier Covered Transactions" refers to any covered transaction between a grantee or subgrantee of Federal funds and a participant (such as the prime or general contract). "Lower Tier Covered Transactions" refers to any covered transaction under a First Tier Covered Transaction (such as subcontracts). "First Tier Participant" refers to the participant who has entered into a covered transaction with a grantee or subgrantee of Federal funds (such as the prime or general contractor). "Lower Tier Participant" refers any participant who has entered into a covered transaction with a First Tier Participant or other Lower Tier Participants (such as subcontractors and suppliers).

e. The prospective lower tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency with which this transaction originated.

f. The prospective lower tier participant further agrees by submitting this proposal that it will include this clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transaction," without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions exceeding the \$25,000 threshold.

g. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant is responsible for ensuring that its principals are not suspended, debarred, or otherwise ineligible to participate in covered transactions. To verify the eligibility of its principals, as well as the eligibility of any lower tier prospective participants, each participant may, but is not required to, check the Excluded Parties List System website (<https://www.epls.gov/>), which is compiled by the General Services Administration.

h. Nothing contained in the foregoing shall be construed to require establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

i. Except for transactions authorized under paragraph e of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the

department or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.

Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion—Lower Tier Participants:

1. The prospective lower tier participant certifies, by submission of this proposal, that neither it nor its principals is presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participating in covered transactions by any Federal department or agency.

2. Where the prospective lower tier participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

XI. CERTIFICATION REGARDING USE OF CONTRACT FUNDS FOR LOBBYING

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts which exceed \$100,000 (49 CFR 20).

1. The prospective participant certifies, by signing and submitting this bid or proposal, to the best of his or her knowledge and belief, that:

a. No Federal appropriated funds have been paid or will be paid, by or on behalf of the undersigned, to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with the awarding of any Federal contract, the making of any Federal grant, the making of any Federal loan, the entering into of any cooperative agreement, and the extension, continuation, renewal, amendment, or modification of any Federal contract, grant, loan, or cooperative agreement.

b. If any funds other than Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with this Federal contract, grant, loan, or cooperative agreement, the undersigned shall complete and submit Standard Form-L.L.L., "Disclosure Form to Report Lobbying," in accordance with its instructions.

2. This certification is a material representation of fact upon which reliance was placed when this transaction was made or entered into. Submission of this certification is a prerequisite for making or entering into this transaction imposed by 31 U.S.C. 1352. Any person who fails to file the required certification shall be subject to a civil penalty of not less than \$10,000 and not more than \$100,000 for each such failure.

3. The prospective participant also agrees by submitting its bid or proposal that the participant shall require that the language of this certification be included in all lower tier subcontracts, which exceed \$100,000 and that all such recipients shall certify and disclose accordingly.

**ATTACHMENT A - EMPLOYMENT AND MATERIALS
PREFERENCE FOR APPALACHIAN DEVELOPMENT
HIGHWAY SYSTEM OR APPALACHIAN LOCAL ACCESS
ROAD CONTRACTS**

This provision is applicable to all Federal-aid projects funded under the Appalachian Regional Development Act of 1965.

1. During the performance of this contract, the contractor undertaking to do work which is, or reasonably may be, done as on-site work, shall give preference to qualified persons who regularly reside in the labor area as designated by the DOL wherein the contract work is situated, or the subregion, or the Appalachian counties of the State wherein the contract work is situated, except:

a. To the extent that qualified persons regularly residing in the area are not available.

b. For the reasonable needs of the contractor to employ supervisory or specially experienced personnel necessary to assure an efficient execution of the contract work.

c. For the obligation of the contractor to offer employment to present or former employees as the result of a lawful collective bargaining contract, provided that the number of nonresident persons employed under this subparagraph (1c) shall not exceed 20 percent of the total number of employees employed by the contractor on the contract work, except as provided in subparagraph (4) below.

2. The contractor shall place a job order with the State Employment Service indicating (a) the classifications of the laborers, mechanics and other employees required to perform the contract work, (b) the number of employees required in each classification, (c) the date on which the participant estimates such employees will be required, and (d) any other pertinent information required by the State Employment Service to complete the job order form. The job order may be placed with the State Employment Service in writing or by telephone. If during the course of the contract work, the information submitted by the contractor in the original job order is substantially modified, the participant shall promptly notify the State Employment Service.

3. The contractor shall give full consideration to all qualified job applicants referred to him by the State Employment Service. The contractor is not required to grant employment to any job applicants who, in his opinion, are not qualified to perform the classification of work required.

4. If, within one week following the placing of a job order by the contractor with the State Employment Service, the State Employment Service is unable to refer any qualified job applicants to the contractor, or less than the number requested, the State Employment Service will forward a certificate to the contractor indicating the unavailability of applicants. Such certificate shall be made a part of the contractor's permanent project records. Upon receipt of this certificate, the contractor may employ persons who do not normally reside in the labor area to fill positions covered by the certificate, notwithstanding the provisions of subparagraph (1c) above.

5. The provisions of 23 CFR 633.207(e) allow the contracting agency to provide a contractual preference for the use of mineral resource materials native to the Appalachian region.

6. The contractor shall include the provisions of Sections 1 through 4 of this Attachment A in every subcontract for work which is, or reasonably may be, done as on-site work.

STANDARD FEDERAL EQUAL EMPLOYMENT OPPORTUNITY
CONSTRUCTION CONTRACT SPECIFICATIONS
EXECUTIVE ORDER 11246, July 1, 1978

(Revised November 3, 1980)

1. As used in these specifications:

a. "Covered area" means the geographical area described in the solicitation from which this contract resulted;

b. "Director" means Director, Office of Federal Contract Compliance Programs, United States Department of Labor, or any person to whom the Director delegates authority;

c. "Employer Identification Number" means the Federal Social Security Number used on the Employer's Quarterly Federal Tax Return, U.S. Treasury Department Form 941.

d. "Minority" includes:

(i) Black (all persons having origins in any of the Black African racial groups not of Hispanic origin);

(ii) Hispanic (all persons of Mexican, Puerto Rican, Cuban, Central or South American or other Spanish Culture or origin, regardless of race);

(iii) Asian and Pacific Islander (all persons having origins in any of the original peoples of the Far East, Southeast Asia, the Indian Subcontinent, or the Pacific Islands); and

(iv) American Indian or Alaskan Native (all persons having origins in any of the original peoples of North America and maintaining identifiable tribal affiliations through membership or participation or community identification).

2. Whenever the Contractor, or any Subcontractor at any tier, subcontracts a portion of the work involving any construction trade, it shall physically include in each subcontract in excess of \$10,000 the provisions of these specifications and the Notice which contains the applicable goals for minority and female participation and which is set forth in the solicitations from which this contract resulted.

3. If the Contractor is participating (pursuant to 41 CFR 60-4.5) in a Hometown Plan approved by the U.S. Department of Labor in the covered area either individually or through an association, its affirmative action obligations on all work in the Plan area (including goals and timetables) shall be in accordance with that Plan for those trades which have unions participating in the Plan. Contractors must be able to demonstrate their participation in and compliance with the provisions of any such Hometown plan. Each Contractor or Subcontractor participating in an approved plan is individually required to comply with its obligations under the EEO clause, and to make a good faith effort to achieve each goal under the Plan in each trade in which it has employees. The overall good faith performance by other Contractors or Subcontractors toward a goal in an approved Plan does not excuse any covered Contractor's or Subcontractor's failure to take good faith efforts to achieve the Plan goals and timetables.

4. The Contractor shall implement the specific affirmative action standards provided in paragraphs 7 a through p of these specifications. The goals set forth in the solicitation from which this contract resulted are expressed as percentages of the total hours of employment and training of minority and female utilization the Contractor should reasonably be able to achieve in each

construction trade in which it has employees in the covered area

5. Neither the provisions of any collective bargaining agreement, nor the failure by a union with whom the Contractor has collective bargaining agreement, to refer either minorities or women shall excuse the Contractor's obligations under these specifications. Executive Order 11246, or the regulations promulgated pursuant thereto.

6. In order for the nonworking training hours of apprentices and trainees to be counted in meeting the goals, such apprentices and trainees must be employed by the Contractor during the training period, and the Contractor must have made a commitment to employ the apprentices and trainees at the completion of their training, subject to the availability of employment opportunities. Trainees must be trained pursuant to training programs approved by the U.S. Department of Labor.

7. The Contractor shall take specific affirmative actions to ensure equal employment opportunity. The evaluation of the Contractor's compliance with these specifications shall be based upon its effort to achieve maximum results from its actions. The Contractor shall document these efforts fully, and shall implement affirmative action steps at least as extensive as the following:

a. Ensure and maintain a working environment free of harassment, intimidation, and coercion at all sites, and in all facilities at which the Contractor's employees are assigned to work. The Contractor where possible, will assign two or more women to each construction project. The Contractor shall specifically ensure that all foremen, superintendents, and other on-site supervisory personnel are aware of and carry out the Contractor's obligation to maintain such a working environment, with specific attention to minority or female individuals working at such site or in such facilities.

b. Establish and maintain a current list of minority and female recruitment sources, provide written notification to minority and female recruitment sources and to community organizations when the Contractor or its unions have employment opportunities available, and maintain a record of the organizations' responses.

c. Maintain a current file of the names, addresses and telephone numbers of each minority and female off-the-street applicant and minority or female referral from a union, a recruitment source or community organization and of what action was taken with respect to each such individual. If such individual was sent to the union hiring hall for referral and was not referred back to the Contractor by the union or, if referred, not employed by the Contractor, this shall be documented in the file with the reason therefor, along with whatever additional actions the Contractor may have taken.

d. Provide immediate written notification to the Director when the union or unions with which the Contractor has a collective bargaining agreement has not referred to the Contractor a minority person or women sent by the Contractor, or when the Contractor has other information that the union referral process has impeded the Contractor's efforts to meet its obligations.

e. Develop on the job training opportunities and/or participate in training programs for the area which expressly include minorities and women, including upgrading programs and apprenticeship and trainee programs relevant to the Contractor's employment needs, especially those programs funded or approved by the Department of Labor. The Contractor shall provide notice of these programs to the sources complied under 7b above.

f. Disseminate the Contractor's EEO policy by providing notice of the policy to unions and training programs and requesting their cooperation in assisting the Contractor in meeting its EEO obligations: by including it in any policy manual and collective bargaining agreement; by publicizing it in the company newspaper, annual report, etc.; by specific review of the policy with all management personnel and with all minority and female employees at least once a year; and by posting the company EEO policy on bulletin boards accessible to all employees at each location where construction work is performed.

g. Review, at least annually the company's EEO policy and affirmative action obligations under these specifications with all employees having any responsibility for hiring, assignment, layoff, termination or other employment decisions including specific review of these items with on site supervisory personnel such as Superintendents, General Foremen, etc., prior to the initiation of construction work at any job site. A written record shall be made and maintained identifying the time and place of these meetings, persons attending, subject matter discussed, and disposition of the subject matter.

h. Disseminate the Contractor's EEO policy externally by including it in any advertising in the news media, specifically including minority and female news media, and providing written notification to and discussing the Contractor's EEO policy with other Contractors and Subcontractors with whom the Contractor does or anticipates doing business.

i. Direct its recruitment efforts, both oral and written to minority, female and community organizations, to schools with minority and female students and to minority and female recruitment and training organizations serving the Contractor's recruitment area and employment needs. Not later than one month prior to the date for the acceptance of applications for apprenticeship or other training by any recruitment source, the Contractor shall send written notification to organizations such as the above, describing the openings, screening procedures, and tests to be used in the selection process.

j. Encourage present minority and female employees to recruit other minority persons and women and, where reasonable, provide after school, summer, and vacation employment to minority and female youth both on the site and in other areas of a Contractor's workforce.

k. Validate all tests and other selection requirements where there is an obligation to do so under 41 CFR Part 60-3.

l. Conduct, at least annually, an inventory and evaluation at least of all minority and

Goals are published periodically in the Federal Register in notice form, and such notices may be obtained from any Office of Federal Contract Compliance Programs office or from Federal procurement contracting officers. The Contractor is expected to make substantially uniform progress in meeting its goals in each craft during the period specified.

Revised 04-15-81

female personnel for promotional opportunities and encourage these employees to seek or to prepare for, through appropriate training, etc., such opportunities.

m. Ensure that seniority practices, job classifications, work assignments and other personnel practices, do not have a discriminatory effect by continually monitoring all personnel and employment related activities to ensure that the EEO policy and the Contractor's obligations under these specifications are being carried out.

n. Ensure that all facilities and company activities are nonsegregated except that separate or single-user toilet and necessary changing facilities shall be provided to assure privacy between the sexes.

o. Document and maintain a record of all solicitations of offers for subcontracts from minority and female construction contractors and suppliers, including circulation of solicitations to minority and female contractor associations and other business associations.

p. Conduct a review, at least annually, of all supervisors' adherence to and performance under the Contractor's EEO policies and affirmative action obligations.

8. Contractors are encouraged to participate in voluntary associations which assist in fulfilling one or more of their affirmative action obligations (7a through p). The efforts of a contractor association, joint contractor-union, contractor community, or other similar group of which the contractor is a member and participant, may be asserted as fulfilling any one or more of its obligations under 7a through p of these Specifications provided that the contractor actively participates in the group, makes every effort to assure that the group has a positive impact on the employment of minorities and women in the industry, ensures that the concrete benefits of the program are reflected in the Contractor's minority and female workforce participation, makes a good faith effort to meet its individual goals and timetables, and can provide access to documentation which demonstrates the effectiveness of actions taken on behalf of the Contractor. The obligation to comply, however, is the Contractor's and failure of such a group to fulfill an obligation shall not be a defense for the Contractor's noncompliance.

9. A single goal for minorities and a separate single goal for women have been established. The Contractor, however, is required to provide equal employment opportunity and to take affirmative action for all minority groups, both male and female, and all women, both minority and non-minority. Consequently, the Contractor may be in violation of the Executive Order if a particular group is employed in a substantially disparate manner (for example, even though the Contractor has achieved its goals for women generally, the Contractor may be in violation of the Executive Order if a specific minority group of women is underutilized).

10. The Contractor shall not use the goals and timetables or affirmative action standards to discriminate against any person because of race, color, religion, sex, or national origin.

11. The Contractor shall not enter into any Subcontract with any person or firm

debarred from Government Contracts pursuant to Executive Order 11246.

12. The Contractor shall carry out such sanctions and penalties for violation of these specifications and of the Equal Opportunity Clause, including suspension, termination, and cancellation of existing subcontracts as may be imposed or ordered pursuant to Executive Order 11246, as amended, and its implementing regulations, by the Office of Federal Contract Compliance Programs. Any Contractor who fails to carry out such sanctions and penalties shall be in violation of these specifications and Executive Order 11246, as amended.

13. The Contractor, in fulfilling its obligations under these specifications, shall implement specific affirmative action steps at least as extensive as those standards prescribed in paragraph 7 of these specifications, so as to achieve maximum results from its efforts to ensure equal employment opportunity. If the Contractor fails to comply with the requirements of the Executive Order, the implementing regulations, or these specifications, the Director shall proceed in accordance with 41 CFR 60-4.8.

14. The Contractor shall designate a responsible official to monitor all employment related activity to ensure that the company EEO policy is being carried out, to submit reports relating to provisions hereof as may be required by the Government and to keep records. Records shall at least include for each employee the name, address, telephone numbers, construction trade, union affiliation if any, employee identification number when assigned, social security number, race, sex, status (e.g., mechanic, apprentice, trainee, helper, or laborer), dates of changes in status, hours worked per week in the indicated trade, rate of pay, and locations at which the work was performed. Records shall be maintained in an easily understandable and retrievable form; however, to the degree that existing records satisfy this requirement, contractors shall not be required to maintain separate records.

15. Nothing herein provided shall be construed as an imitation upon the application of other laws which establish different standards of compliance or upon the application of requirements for the hiring of local or other area residents (e.g., those under the Public Works Employment Act of 1977 and the Community Development Block Grant Program).

Title VI/Non-Discrimination Assurances

APPENDIX A

During the performance of this contract, the contractor, for itself, its assignees, and successors in interest (hereinafter referred to as the "contractor") agrees as follows:

1. **Compliance with Regulations:** The contractor (hereinafter includes consultants) will comply with the Acts and the Regulations relative to Non-discrimination in Federally-assisted programs of the U.S. Department of Transportation, the *Federal Highway Administration*, as they may be amended from time to time, which are herein incorporated by reference and made a part of this contract.
2. **Non-discrimination:** The contractor, with regard to the work performance by it during the contract, will not discriminate on the grounds of race, color, or national origin in the selection and retention of subcontractors, including procurements of materials and leases of equipment. The contractor will not participate directly or indirectly in the discrimination prohibited by the Acts and the Regulations, including employment practices when the contract covers any activity, project, or program set forth in Appendix B of 49 CFR Part 21.
3. **Solicitations for Subcontracts, Including Procurements of Materials and Equipment:** In all solicitations, either by competitive bidding, or negotiation made by the contractor for work to be performed under a subcontract, including procurements of materials, or leases of equipment, each potential subcontractor or supplier will be notified by the contractor of the contractor's obligations under this contract and the Acts and Regulations relative to Non-discrimination on the grounds of race, color, or national origin.
4. **Information and Reports:** The contractor will provide all information and reports required by the Acts, the Regulations, and directives issued pursuant thereto and will permit access to its books, records, accounts, other sources of information, and its facilities as may be determined by the Recipient or the *Federal Highway Administration* to be pertinent to ascertain compliance with such Acts, Regulations, and instructions. Where any information required of a contractor is in the exclusive possession of another who fails or refuses to furnish the information, the contractor will so certify to the Recipient or the *Federal Highway Administration*, as appropriate, and will set forth what efforts it has made to obtain the information.
5. **Sanctions for Noncompliance:** In the event of a contractor's noncompliance with the Non-discrimination provisions of this contract, the Recipient will impose such contract sanctions as it or the *Federal Highway Administration* may determine to be appropriate, including, but not limited to:
 - a. withholding payments to the contractor under the contract until the contractor complies; and/or
 - b. cancelling, terminating, or suspending a contract, in whole or in part.
6. **Incorporation of Provisions:** The contractor will include the provisions of paragraphs one through six in every subcontract, including procurements of materials and leases of equipment, unless exempt by the Acts, the Regulations and directives issued pursuant thereto. The contractor will take action with request to any subcontract or procurement as the Recipient or the *Federal Highway Administration* may direct as a means of enforcing such provisions including sanctions for noncompliance. Provided, that if the contractor becomes involved in, or is threatened with litigation by a subcontractor or supplier because of such direction, the contractor may request the Recipient to enter into any litigation to protect the interests of the Recipient. In addition, the contractor may request the United States to enter into the litigation to protect the interests of the United States.

Title VI/Non-Discrimination Assurances

APPENDIX E

During the performance of this contract, the contractor, for itself, its assignees, and successors in interest (hereinafter referred to as the "contractor") agrees to comply with the following non-discrimination statutes and authorities; including but not limited to:

Pertinent Non-Discrimination Authorities:

- Title VI of the Civil Rights Act of 1964 (42 U.S.C. § 2000d *et seq.*, 78 stat. 252), (prohibits discrimination on the basis of race, color, national origin); and 49 CFR Part 21.
- The Uniform Relocation Assistance and Real Property Acquisition Policies Act of 1970, (42 U.S.C. § 4601), (prohibits unfair treatment of persons displaced or whose property has been acquired because of Federal or Federal-aid programs and projects);
- Federal-Aid Highway Act of 1973, (23 U.S.C. § 324 *et seq.*), (prohibits discrimination on the basis of sex);
- Section 504 of the Rehabilitation Act of 1973, (29 U.S.C. § 794 *et seq.*), as amended, (prohibits discrimination on the basis of disability); and 49 CFR Part 27;
- The Age Discrimination Act of 1975, as amended, (42 U.S.C. § 6101 *et seq.*), (prohibits discrimination on the basis of age);
- Airport and Airway Improvement Act of 1982, (49 USC § 471, Section 47123), as amended, (prohibits discrimination based on race, creed, color, national origin, or sex);
- The Civil Rights Restoration Act of 1987, (PL 100-209), (Broadened the scope, coverage and applicability of Title VI of the Civil Rights Act of 1964, The Age Discrimination Act of 1975 and Section 504 of the Rehabilitation Act of 1973, by expanding the definition of the terms "programs or activities" to include all of the programs or activities of the Federal-aid recipients, sub-recipients and contractors, whether such programs or activities are Federally funded or not);
- Titles II and III of the Americans with Disabilities Act, which prohibit discrimination on the basis of disability in the operation of public entities, public and private transportation systems, places of public accommodation, and certain testing entities (42 U.S.C. §§ 12131-12189) as implemented by Department of Transportation regulations at 49 C.F.R. parts 37 and 38;
- The Federal Aviation Administration's Non-discrimination statute (49 U.S.C. § 47123) (prohibits discrimination on the basis of race, color, national origin, and sex);
- Executive Order 12898, Federal Actions to Address Environmental Justice in Minority Populations and Low-Income Populations, which ensures discrimination against minority populations by discouraging programs, policies, and activities with disproportionately high and adverse human health or environmental effects on minority and low-income populations;
- Executive Order 13166, Improving Access to Services for Persons with Limited English Proficiency, and resulting agency guidance, national origin discrimination includes discrimination because of limited English proficiency (LEP). To ensure compliance with Title VI, you must take reasonable steps to ensure that LEP persons have meaningful access to your programs (70 Fed. Reg. at 74087 to 74100);
- Title IX of the Education Amendments of 1972, as amended, which prohibits you from discriminating because of sex in education programs or activities (20 U.S.C. 1687 *et seq.*).

NOTICE OF REQUIREMENT FOR AFFIRMATIVE ACTION
TO ENSURE EQUAL EMPLOYMENT OPPORTUNITY
(EXECUTIVE ORDER 11246)

JULY 1, 1978 (Revised November 3, 1980)

(Revised April 15, 1981)

1. The bidder's attention is called to the "Equal Opportunity Clause" and the "Standard Federal Equal Employment Specifications" set forth herein.

2. The goals and timetables for minority and female participation, expressed in percentage terms for the Contractor's aggregate work force in each trade on all construction work in the covered area, are as follows:

	Minority	Female
Tucson and balance of Pima County	24.1	6.9
Cochise, Graham, Greenlee and Santa Cruz Counties	27.0	6.9
Phoenix and balance of Maricopa County	15.8	6.9
Apache, Coconino, Gila, Mohave, Navajo, Pinal, Yavapai and Yuma Counties	19.6	6.9

These goals are applicable to all the Contractor's construction work (whether or not it is Federal or federally assisted) performed in all areas where he has Federal or federally assisted work.

The Contractor's compliance with the Executive Order and the regulations in 41 CFR Part 60-4 shall be based on its implementation of the Equal Opportunity Clause, specific affirmative action obligations required by the specifications set forth in 41 CFR 60-4.3 (a), and its efforts to meet the goals. The hours of minority and female employment and training must be substantially uniform throughout the length of the contract, and in each trade, and the Contractor shall make a good faith effort to employ minorities and women evenly on each of its projects. The transfer of minority or female employees or trainees from Contractor to Contractor or from project to project for the sole purpose of meeting the Contractor's goals shall be a violation of the contract, the Executive Order and the regulations in 41 CFR Part 60-4. Compliance with the goals will be measured against the total work hours performed.

EQUAL EMPLOYMENT OPPORTUNITY
COMPLIANCE REPORTS

(Project, Training and Annual)

Federal-Aid Projects

February 1, 1977; Revised July 1, 1978; Revised November 3, 1980
Revised April 15, 1981; Revised September 7, 1983
Revised October 15, 1998; Revised August, 1, 2005;
Revised March 1, 2015

ANNUAL REPORT:

For each contract in the amount of \$10,000 or more, and for each subcontract, regardless of tier not including material suppliers, in the amount of \$10,000 or more, the contractor and each subcontractor regardless of tier shall submit an annual Equal Employment Opportunity (EEO) Report containing all the information required on Form FHWA-1391. Contractors and subcontractors are required to submit the required information through the LCPtracker system, a labor compliance software monitoring certified payroll and prevailing wage.

The staffing figures to be reported should represent the project workforce on board in all or any part of the last payroll period preceding the end of July.

The report shall be submitted no later than September 1.

machine (Moto paver driver), small self-propelled compactor (with blade-backfill, ditch operation), straw blower, tractor (wheel type), tripper, tugger (single drum), welding machine, winch truck

GROUP 2:

ALL COUNTIES INCLUDING MARICOPA: Aggregate Plant, Asphalt plant Mixer, Bee Gee, Boring Machine, Concrete Pump, Concrete Mechanical Tamping-Spreading Finishing Machine, Concrete Batch Plant, Concrete Mixer (paving & mobile), Elevating Grader (except as otherwise classified), Field Equipment Serviceman, Locomotive Engineer (including Dinky 20 tons & over), Moto-Paver, Oiler-Driver, Operating Engineer Rigger, Power Jumbo Form Setter, Road Oil Mixing Machine, Self-Propelled Compactor (with blade-grade operation), Slip Form (power driven lifting device for concrete forms), Soil Cement Road Mixing Machine, Pipe-Wrapping & Cleaning Machine (stationary or traveling), Surface Heater & Planer, Trenching Machine, Tugger (2 or more drums).

MARICOPA COUNTY ONLY: Backhoe < 1 cu yd, Motor Grader (rough), Scraper (pneumatic tired), Roller (all types asphalt), Screed, Skip Loader (all types 3<6 cu yd), Tractor (dozer, pusher-all).

GROUP 3:

ALL COUNTIES INCLUDING MARICOPA: Auto Grade Machine, Barge, Boring Machine (including Mole, Badger & similar type directional/horizontal), Crane (crawler & pneumatic 15>100 tons), Crawler type Tractor with boom attachment & slope bar, Derrick, Gradall, Heavy Duty Mechanic-Welder, Helicopter Hoist or Pilot, Highline Cableway, Mechanical Hoist, Mucking Machine, Overhead Crane, Pile Driver Engineer (portable, stationary or skid), Power Driven Ditch Lining or Ditch Trimming Machine, Remote Control Earth Moving Machine, Slip Form Paving Machine (including Gunnert, Zimmerman & similar types), Tower Crane or similar type.

MARICOPA COUNTY ONLY: Backhoe<10 cu yd, Clamshell < 10 cu yd, Concrete Pump (truck mounted with boom only), Dragline <10 cu yd, Grade Checker, Motor Grader (finish-any type power blade), Shovel < 10 cu yd.

GROUP 4: Backhoe 10 cu yd and over, Clamshell 10 cu yd and over, Crane (pneumatic or crawler 100 tons & over), Dragline 10 cu yd and over, Shovel 10 cu yd and over.

All Operators, Oilers, and Motor Crane Drivers on equipment with Booms, except concrete pumping truck booms, including Jibs, shall receive \$0.01 per hour per foot over 80 ft in addition to regular rate of pay

Premium pay for performing hazardous waste removal \$0.50 per hour over base rate.

COCONINO, MARICOPA, MOHAVE, YAVAPAI & YUMA COUNTIES

	Rates	Fringes
Ironworker, Rebar.....	\$ 26.00	21.77

- Zone 1: 0 to 50 miles from City Hall in Phoenix or Tucson
- Zone 2: 050 to 100 miles - Add \$4.00
- Zone 3: 100 to 150 miles - Add \$5.00
- Zone 4: 150 miles & over - Add \$6.50

 * LABO0383-002 06/01/2015

	Rates	Fringes
Laborers:		
Group 1.....	\$ 16.49	4.95
Group 2.....	\$ 17.39	4.95
Group 3.....	\$ 18.09	4.95
Group 4.....	\$ 19.03	4.95
Group 5.....	\$ 19.89	4.95

LABORERS CLASSIFICATIONS:

GROUP 1: All Counties: Chipper, Rip Rap Stoneman. Pinal County Only: General/Cleanup Laborer. Maricopa County Only: Flagger.

GROUP 2: Asphalt Laborer (Shoveling-excluding Asphalt Raker or Ironer), Bander, Cement Mason Tender, Concrete Mucker, Cutting Torch Operator, Fine Grader, Guinea Chaser, Power Type Concrete Buggy

GROUP 3: Chain Saw, Concrete Small Tools, Concrete Vibrating Machine, Cribber & Shorer (except tunnel), Hydraulic Jacks and similar tools, Operator and Tender of Pneumatic and Electric Tools (not herein separately classified), Pipe Caulker and Back-Up Man-Pipeline, Pipe Wrapper, Pneumatic Gopher, Pre-Cast Manhole Erector, Rigger and Signal Man-Pipeline

GROUP 4: Air and Water Washout Nozzleman; Bio-Filter, Pressman, Installer, Operator; Scaffold Laborer; Chuck Tender; Concrete Cutting Torch; Gunite; Hand-Guided Trencher; Jackhammer and/or Pavement Breaker; Scaler (using boson's chair or safety belt); Tamper (mechanical all types).

GROUP 5: AC Dumpman, Asbestos Abatement, Asphalt Raker II, Drill Doctor/Air Tool Repairman, Hazardous Waste Removal, Lead Abatement, Lead Pipeman, Process Piping Installer, Scaler (Driller), Pest Technician/Weed Control, Scissor Lift, Hydro Mobile Scaffold Builder.

 * PAIN0086-001 04/01/2014

Rates	Fringes
-------	---------

PAINTER

PAINTER (Yavapai County
only), SAND BLASTER/WATER
BLASTER (all Counties).....\$ 19.50 4.85

ZONE PAY: More than 100 miles from Old Phoenix Courthouse
\$3.50 additional per hour.

SUAZ2009-001 04/20/2009

	Rates	Fringes
CEMENT MASON.....	\$ 19.28	3.99
ELECTRICIAN.....	\$ 22.84	6.48
IRONWORKER (Rebar)		
Pima County.....	\$ 23.17	14.83
Pinal County.....	\$ 20.27	8.35
LABORER		
Asphalt Raker.....	\$ 15.49	3.49
Compaction Tool Operator.....	\$ 14.59	2.91
Concrete Worker.....	\$ 13.55	3.20
Concrete/Asphalt Saw.....	\$ 13.95	2.58
Driller-Core, diamond, wagon, air track.....	\$ 16.94	3.12
Dumpman Spotter.....	\$ 14.99	3.16
Fence Builder.....	\$ 13.28	2.99
Flagger		
Coconino, Mohave, Pima, Pinal, Yavapai & Yuma.....	\$ 12.35	1.59
Formsetter.....	\$ 16.09	3.97
General/Cleanup Laborer		
Coconino, Maricopa, Mohave, Pima, Yavapai & Yuma.....	\$ 14.54	3.49
Grade Setter (Pipeline).....	\$ 17.83	5.45
Guard Rail Installer.....	\$ 13.28	2.99
Landscape Laborer.....	\$ 11.39	
Landscape Sprinkler Installer.....	\$ 15.27	
Pipelayer.....	\$ 14.81	2.96
Powderman, Hydrasonic.....	\$ 16.39	2.58
OPERATOR: Power Equipment		
Asphalt Laydown Machine.....	\$ 21.19	6.05
Backhoe < 1 cu yd		
Coconino, Mohave, Pima, Pinal, Yavapai & Yuma.....	\$ 17.37	3.85
Backhoe < 10 cu yd		
Coconino, Mohave, Pima, Pinal, Yavapai & Yuma.....	\$ 18.72	3.59
Clamshell < 10 cu yd		
Coconino, Mohave, Pima, Pinal, Yavapai & Yuma.....	\$ 18.72	3.59
Concrete Pump (Truck Mounted with boom only)		
Coconino, Mohave, Pima,		

Pinal, Yavapai & Yuma.....	\$ 19.92	7.10
Crane (under 15 tons).....	\$ 21.35	7.36
Dragline (up to 10 cu yd)		
Coconino, Mohave, Pima,		
Pinal, Yavapai & Yuma.....	\$ 18.72	3.59
Drilling Machine		
(including Water Wells).....	\$ 20.58	5.65
Grade Checker		
Coconino, Mohave, Pima,		
Pinal, Yavapai & Yuma.....	\$ 16.04	3.68
Hydrographic Seeder.....	\$ 15.88	7.67
Mass Excavator.....	\$ 20.97	4.28
Milling Machine/Rotomill....	\$ 21.42	7.45
Motor Grader (Finish-any		
type power blade)		
Coconino, Mohave, Pima,		
Pinal, Yavapai & Yuma.....	\$ 21.92	4.66
Motor Grader (Rough)		
Coconino, Mohave, Pima,		
Pinal, Yavapai & Yuma.....	\$ 20.07	4.13
Oiler.....	\$ 18.15	8.24
Power Sweeper.....	\$ 16.76	4.44
Roller (all types Asphalt)		
Coconino, Mohave, Pima,		
Pinal, Yavapai & Yuma.....	\$ 18.27	3.99
Roller (excluding asphalt)..	\$ 15.65	3.32
Scraper (pneumatic tired)		
Coconino, Mohave, Pima,		
Pinal, Yavapai & Yuma.....	\$ 17.69	3.45
Screed		
Coconino, Mohave, Pima,		
Pinal, Yavapai & Yuma.....	\$ 17.54	3.72
Shovel < 10 cu yd		
Coconino, Mohave, Pima,		
Pinal, Yavapai & Yuma.....	\$ 18.72	3.59
Skip Loader (all types <3		
cu yd).....	\$ 18.28	5.30
Skip Loader (all types 3 <		
6 cu yd)		
Coconino, Mohave, Pima,		
Pinal, Yavapai & Yuma.....	\$ 18.64	4.86
Skip Loader (all types 6 <		
10 cu yd).....	\$ 20.15	4.52
Tractor (dozer, pusher -		
all)		
Coconino, Mohave, Pima,		
Pinal, Yavapai & Yuma.....	\$ 17.26	2.65

PAINTER

Coconino, Maricopa,		
Mohave, Pima, Pinal & Yuma..	\$ 15.57	3.92

TRUCK DRIVER

2 or 3 Axle Dump or		
Flatrack.....	\$ 16.27	3.30
5 Axle Dump or Flatrack.....	\$ 13.97	2.89
6 Axle Dump or Flatrack (<		
16 cu yd).....	\$ 17.79	6.42
Belly Dump.....	\$ 14.67	
Oil Tanker Bootman.....	\$ 22.03	

Self-Propelled Street Sweeper.....	\$ 13.11	5.48
Water Truck 2500 < 3900 gallons.....	\$ 18.14	4.55
Water Truck 3900 gallons and over.....	\$ 15.92	3.33
Water Truck under 2500 gallons.....	\$ 15.94	4.16

WELDERS - Receive rate prescribed for craft performing operation to which welding is incidental.

Unlisted classifications needed for work not included within the scope of the classifications listed may be added after award only as provided in the labor standards contract clauses (29CFR 5.5 (a) (1) (ii)).

The body of each wage determination lists the classification and wage rates that have been found to be prevailing for the cited type(s) of construction in the area covered by the wage determination. The classifications are listed in alphabetical order of "identifiers" that indicate whether the particular rate is a union rate (current union negotiated rate for local), a survey rate (weighted average rate) or a union average rate (weighted union average rate).

Union Rate Identifiers

A four letter classification abbreviation identifier enclosed in dotted lines beginning with characters other than "SU" or "UAVG" denotes that the union classification and rate were prevailing for that classification in the survey. Example: PLUM0198-005 07/01/2014. PLUM is an abbreviation identifier of the union which prevailed in the survey for this classification, which in this example would be Plumbers. 0198 indicates the local union number or district council number where applicable, i.e., Plumbers Local 0198. The next number, 005 in the example, is an internal number used in processing the wage determination. 07/01/2014 is the effective date of the most current negotiated rate, which in this example is July 1, 2014.

Union prevailing wage rates are updated to reflect all rate changes in the collective bargaining agreement (CBA) governing this classification and rate.

Survey Rate Identifiers

Classifications listed under the "SU" identifier indicate that no one rate prevailed for this classification in the survey and the published rate is derived by computing a weighted average rate based on all the rates reported in the survey for that

classification. As this weighted average rate includes all rates reported in the survey, it may include both union and non-union rates. Example: SULA2012-007 5/13/2014. SU indicates the rates are survey rates based on a weighted average calculation of rates and are not majority rates. LA indicates the State of Louisiana. 2012 is the year of survey on which these classifications and rates are based. The next number, 007 in the example, is an internal number used in producing the wage determination. 5/13/2014 indicates the survey completion date for the classifications and rates under that identifier.

Survey wage rates are not updated and remain in effect until a new survey is conducted.

Union Average Rate Identifiers

Classification(s) listed under the UAVG identifier indicate that no single majority rate prevailed for those classifications; however, 100% of the data reported for the classifications was union data. EXAMPLE: UAVG-OH-0010 08/29/2014. UAVG indicates that the rate is a weighted union average rate. OH indicates the state. The next number, 0010 in the example, is an internal number used in producing the wage determination. 08/29/2014 indicates the survey completion date for the classifications and rates under that identifier.

A UAVG rate will be updated once a year, usually in January of each year, to reflect a weighted average of the current negotiated/CBA rate of the union locals from which the rate is based.

WAGE DETERMINATION APPEALS PROCESS

1.) Has there been an initial decision in the matter? This can be:

- * an existing published wage determination
- * a survey underlying a wage determination
- * a Wage and Hour Division letter setting forth a position on a wage determination matter
- * a conformance (additional classification and rate) ruling

On survey related matters, initial contact, including requests for summaries of surveys, should be with the Wage and Hour Regional Office for the area in which the survey was conducted because those Regional Offices have responsibility for the Davis-Bacon survey program. If the response from this initial contact is not satisfactory, then the process described in 2.) and 3.) should be followed.

With regard to any other matter not yet ripe for the formal process described here, initial contact should be with the Branch of Construction Wage Determinations. Write to:

Branch of Construction Wage Determinations
Wage and Hour Division

U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

2.) If the answer to the question in 1.) is yes, then an interested party (those affected by the action) can request review and reconsideration from the Wage and Hour Administrator (See 29 CFR Part 1.8 and 29 CFR Part 7). Write to:

Wage and Hour Administrator
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

The request should be accompanied by a full statement of the interested party's position and by any information (wage payment data, project description, area practice material, etc.) that the requestor considers relevant to the issue.

3.) If the decision of the Administrator is not favorable, an interested party may appeal directly to the Administrative Review Board (formerly the Wage Appeals Board). Write to:

Administrative Review Board
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

4.) All decisions by the Administrative Review Board are final.

END OF GENERAL DECISION

ARIZONA DEPARTMENT OF TRANSPORTATION
 INTERMODAL TRANSPORTATION DIVISION
 CONTRACTS AND SPECIFICATIONS SECTION

BID SCHEDULE

CONTRACT # 2016059

TRACS No.	Project No.	Item	County	District	Gross Length	Net Length	Prepared By:
0000 MA SRI SZ15501C	SRI-0-(202)T	LOCAL	MARICOPA	PHOENIX		0	Shah Rimpal

Highway Termini	Location	Work Description
• SALT RIVER PIMA-MARICOPA INDIAN COMMUNITY	• SALT RVR PIMA-MARICOPA INDIAN	• SYSTEM ENHANCEMENT-OTHER ENHANCEMENTS

BID SCHEDULE

0000 MA SRI SZ15501C

Item No.	Item Description	Unit	Quantity	Unit Price	Extended Amount
2020020	REMOVAL OF CONCRETE CURB	L.FT.	48		
2020025	REMOVAL OF CONCRETE SIDEWALKS, DRIVEWAYS AND SLABS	SQ.FT.	1,435		
2020029	REMOVAL OF ASPHALTIC CONCRETE PAVEMENT	SQ.YD.	1,706		
2020041	REMOVAL OF PIPE	L.FT.	250		
2020048	REMOVAL OF STRUCTURE (CONCRETE CATCH BASIN)	EACH	1		
2020053	REMOVE (FIRE HYDRANT)	EACH	3		
2020061	REMOVE AND RELOCATE MAIL BOXES	EACH	20		
2020101	REMOVE FENCE	L.FT.	452		
2020155	REMOVE (FENCE GATE)	EACH	2		
2030601	GRADER DITCH	L.FT.	920		
3030022	AGGREGATE BASE, CLASS 2	CU.YD.	337		
4090003	ASPHALTIC CONCRETE (MISCELLANEOUS STRUCTURAL)	TON	494		
5010011	PIPE, CORRUGATED METAL, 24"	L.FT.	10		
5011501	PIPE, REINFORCED CONCRETE (CLASS IV) (11" x 18")	L.FT.	394		
5011502	PIPE, REINFORCED CONCRETE (CLASS III) (18' x 28.5")	L.FT.	59		

BID SCHEDULE

0000 MA SRI SZ15501C

Item No.	Item Description	Unit	Quantity	Unit Price	Extended Amount
5030162	INLET STRUCTURE (DETAIL DC)	EACH	1		
5030348	CATCH BASIN, TYPE D, ONE 10' WING (MAG DET. 533-1)	EACH	1		
5040901	IRRIGATION JUNCTION BOX	EACH	1		
6016088	HEADWALL (DETAIL DG)	EACH	13		
6080109	REMOVE AND REINSTALL SIGN	L.SUM	1		
6110202	METAL HANDRAIL (DETAIL DF)	L.FT.	24		
7015052	OBLITERATE PAVEMENT MARKING (STRIPE)	L.FT.	11		
7016030	BARRICADE (TYPE II, VERT.PANEL, TUBULAR MARKER)	EACH-DAY	6,220		
7016031	BARRICADE (TYPE III, HIGH LEVEL FLAG TREES)	EACH-DAY	20		
7016032	PORTABLE SIGN STANDS (RIGID)	EACH-DAY	40		
7016033	PORTABLE SIGN STANDS (SPRING TYPE)	EACH-DAY	120		
7016035	WARNING LIGHTS (TYPE A)	EACH-DAY	1,920		
7016037	WARNING LIGHTS (TYPE C)	EACH-DAY	6,220		
7016039	EMBEDDED SIGN POST	EACH-DAY	2,240		
7016051	TEMPORARY SIGN (LESS THAN 10 S.F.)	EACH-DAY	40		

BID SCHEDULE

0000 MA SRI SZ15501C

Item No.	Item Description	Unit	Quantity	Unit Price	Extended Amount
7016052	TEMPORARY SIGN (10 S.F. OR MORE)	EACH-DAY	1,240		
7016061	FLASHING ARROW PANEL	EACH-DAY	20		
7016075	FLAGGING SERVICES (CIVILIAN)	HOUR	130		
7016078	FLAGGING SERVICES (LOCAL ENFORCEMENT OFFICER)	HOUR	8		
7040072	PAVEMENT MARKING (TRANSVERSE) (THERMOPLASTIC) (ALKYD) (0.090")	L.FT.	231		
7360333	PEDESTRIAN LIGHTING (SOLAR)	EACH	9		
8030106	DECOMPOSED GRANITE (1/4 INCH MINUS)	SQ.YD.	675		
8030117	ROCK MULCH (GRADATION C)	SQ.YD.	5,870		
8061002	TREE (FIVE GALLON)	EACH	121		
8070001	LANDSCAPING ESTABLISHMENT	L.SUM	1		
8080195	REMOVE AND SALVAGE VALVE (8 INCHES)	EACH	1		
8080263	VALVE (8 INCHES) (DETAIL L)	EACH	1		
8080651	FIRE HYDRANT	EACH	3		
8101021	EROSION CONTROL (WATTLES) (9")	L.FT.	42		
9010001	MOBILIZATION	L.SUM	1		

BID SCHEDULE

0000 MA SRI SZ15501C

Item No.	Item Description	Unit	Quantity	Unit Price	Extended Amount
9080093	CONCRETE CURB AND GUTTER, TYPE A (MAG DETAIL 220-1)	L.FT.	1,362		
9080110	CONCRETE CURB END	EACH	7		
9080112	CONCRETE TRANSITION CURB	EACH	4		
9080201	CONCRETE SIDEWALK (C-05.20)	SQ.FT.	56,579		
9080246	CONCRETE (SIDEWALK RAMP & VALLEY GUTTER) (DETAIL E)	SQ.FT.	150		
9080296	CONCRETE SIDEWALK RAMP (DETAIL B)	EACH	8		
9080298	CONCRETE SIDEWALK RAMP (DETAIL B, FLUSH)	EACH	9		
9080300	CONCRETE SIDEWALK RAMP (C-05.30, TYPE A)	EACH	1		
9080305	CONCRETE DRIVEWAY (DETAIL A, CONCRETE DRIVEWAY)	SQ.FT.	4,970		
9080602	CONCRETE BUS SHELTER PAD (DETAIL F, BUS PAD)	SQ.FT.	580		
9120002	SHOTCRETE (DETAIL DE)	SQ.YD.	15		
9130003	RIPRAP (GROUTED)	CU.YD.	1		
9140031	TRASH RECEPTACLE (ABOVE GROUND)	EACH	5		
9140072	BENCH	EACH	5		

BID SCHEDULE

0000 MA SRI SZ15501C

Item No.	Item Description	Unit	Quantity	Unit Price	Extended Amount
9240114	MISCELLANEOUS WORK (REMOVAL AND DISPOSAL OF TRASH, DEBRIS, AND LITTER)	HOUR	50		
9240129	MISCELLANEOUS WORK (WATER HARVESTING BASIN)	SQ.YD.	3,200		
9240181	MISCELLANEOUS WORK (CONTROL OF NOXIOUS PLANTS) (MANUAL METHODS)	SQ.YD.	5,490		
9240182	MISCELLANEOUS WORK (CONTROL OF NOXIOUS PLANTS) (HERBICIDE)	SQ.YD.	6,710		
9250001	CONSTRUCTION SURVEYING AND LAYOUT	L.SUM	1		

BID TOTAL :

PROPOSAL

TO THE ARIZONA DEPARTMENT OF TRANSPORTATION:

Gentlemen:

The following Proposal is made for constructing project

0000 MA SRI SZ15501C CMAQ-SRI-0(202)T
SALT RIVER PIMA-MARICOPA INDIAN COMMUNITY
(Longmore Rd; McDowell Rd. - Osborn Rd.)

in the State of Arizona.

The following Proposal is made on behalf of _____

and no others.

(NAME OF COMPANY, FIRM, OR CORPORATION)

The undersigned hereby certifies that (s)he has been duly authorized to submit a proposal on behalf of the company, firm, or corporation mentioned above; and further certifies, pursuant to Subsection 112(c) of Title 23, United States Code and Title 44, Chapter 10, Article 1 of the Arizona Revised Statutes, that neither (s)he nor anyone associated with the company, firm, or corporation mentioned above has, either directly or indirectly, entered into any agreement, participated in any collusion, or otherwise taken any action in restraint of free competitive bidding in connection with such project and furthermore that no member or employee of the Arizona Department of Transportation is personally or financially interested, directly or indirectly, in the Proposal, or in any purchase or sale of any materials or supplies for the work to which it relates, or in any portion of the profits thereof.

The undersigned certifies that the approved Plans, Standard Specifications, Special Provisions and forms of Contract and Bond authorized by the Arizona Department of Transportation and constituting essential parts of this proposal, have been carefully examined, and also that the site of the work has been personally inspected. The undersigned declares that the amount and nature of the work to be done is understood and that at no time will misunderstanding of the Plans, Specifications, Special Provisions, or conditions to be overcome, be plead. On the basis of Plans, Specifications, Special Provisions, and the forms of Contract and Bond proposed for use, the undersigned proposes to furnish all the necessary equipment, materials, machinery, tools, apparatus, and other means of construction, and labor to do all the work in the manner specified, and to accept, as full compensation therefor, the sum of the various products obtained by multiplying each unit price, herein bid for the work or materials, by the quantity thereof actually incorporated in the complete project, as determined by the State Engineer. The undersigned understands that the quantities mentioned herein are approximate only and are subject to increase or decrease and hereby proposes to perform all quantities of work as either increased or decreased, in accordance with the provisions of the Specifications, at the unit price bid in the Bidding Schedule.

The undersigned further proposes to perform all extra work that may be required on the basis provided in the Specifications and to give such work personal attention and to secure economical performance.

The undersigned further proposes to execute the Contract Agreement and furnish satisfactory Bond within ten calendar days from the date of Notice of Award, time being of the essence. The undersigned further proposes to begin work as specified in the contract attached hereto, and to complete the work on or before expiration of the contract time as defined in the Specifications, and maintain at all times a Payment Bond and a Performance Bond, approved by the State Engineer, in an amount equal to one hundred (100) percent of the total bid. These bonds shall serve not only to guarantee the completion of the work on the part of the undersigned, but also to guarantee the excellence of both workmanship and material and the payment of all obligations incurred, until the work is finally accepted and the provisions of the Plans, Standard Specifications and Special Provisions fulfilled.

A Proposal Guaranty in the amount and character named in the Advertisement for Bids is enclosed, which Proposal Guaranty is submitted as a guaranty of the good faith of the bidder, and that the bidder will enter into written contract, as provided, to do the work, if successful in securing the award thereof, and it is hereby agreed that if at any time other than as provided in the Proposal there should be failure on the part of the undersigned to execute the Contract and furnish satisfactory Bond as herein provided, the State of Arizona, in either of such events, shall be entitled and is hereby given the right to retain the said Proposal Guaranty as liquidated damages.

If by a Corporation:

(Seal)

Corporate Name: _____

Corporate Mailing Address: _____ Zip Code: _____

Incorporated under the laws of the State of: _____

By (Signature): _____ Date: _____

President: _____

Secretary: _____

Treasurer: _____

If by a Firm or Partnership:

Firm or Partnership Mailing Name: _____

Firm or Partnership Address: _____

By (Signature): _____ Date: _____

Name and Address of Each Member: _____

If by an Individual:

Signature: _____ Date: _____

Mailing Address: _____

ARIZONA DEPARTMENT OF TRANSPORTATION
SURETY (BID) BOND
(Penalty of this bond must not be less than 10% of the bid amount)



KNOW ALL MEN BY THESE PRESENTS, THAT _____

as Principal, hereinafter called the Principal, and _____

_____ a corporation duly organized under the laws of the state of _____ hereinafter called the Surety, holding a certificate of authority to transact surety business in this State issued by the Director of the Department of Insurance, are held and firmly bound unto the Arizona Department of Transportation, as Obligee, hereinafter called the Obligee, in the sum of Ten Percent (10%) of the amount of the bid of Principal, submitted by Principal to the Arizona Department of Transportation for the work described below, for the payment of which sum well and truly to be made, the said Principal and the said Surety bind ourselves, our heirs, executors, administrators, successors, and assigns, jointly and severally, firmly by these presents.

WHEREAS, the Principal is herewith submitting its proposal for TRACS/Project No. _____

0000 MA SRI SZ15501C CMAQ-SRI-0(202)T
SALT RIVER PIMA-MARICOPA INDIAN COMMUNITY
(Longmore Rd; McDowell Rd. - Osborn Rd.)

NOW THEREFORE, if the Obligee, acting by and through its Transportation board, shall accept the proposal of the Principal and the Principal shall enter into contract with the Obligee in accordance with the terms of such proposal, and give such bonds and certificates of insurance as may be specified in the contract documents with good and sufficient surety for the faithful performance of such contract and for the prompt payment of labor and material furnished in the prosecution thereof, or in the event of the failure of the Principal to enter into such contract and give such bonds and certificates of insurance, if the Principal shall pay to the Obligee the difference not to exceed the penalty of the bond between the amount specified in the proposal and such larger amount for which the obligee may in good faith contract with another party to perform the work covered by the proposal then this obligation is void. Otherwise it remains in full force and effect.

IN WITNESS WHEREOF, we hereunto set our hands and seals:

Principal

Surety

By

By Attorney-in-Fact

Title

Address Attorney-in-Fact

Subscribed and sworn before me
this _____ day of _____, 20 _____.

My Commission expires: _____

**CERTIFICATION WITH REGARD TO THE PERFORMANCE OF
PREVIOUS CONTRACTS OR SUBCONTRACTS SUBJECT TO THE
EQUAL OPPORTUNITY CLAUSE AND THE FILING OF REQUIRED REPORTS
APRIL, 1969**

The bidder _____, proposed subcontractor _____, hereby certifies that he has _____, has not _____, participated in a previous contract or subcontract subject to the equal opportunity clause, as required by Executive Orders 10925, 11114, or 11246, and that he has _____, has not _____, filed with the Joint Reporting committee, the Director of the Office of Federal Contract Compliance, a Federal Government contracting or administering agency or the former President's Committee on Equal Employment Opportunity, all reports due under the applicable filing requirements.

(Company)

By: _____

(Title)

Date: _____

Note: The above certification is required by the Equal Employment Opportunity Regulations of the Secretary of Labor (41 CFR 60-1.7b (1),) and must be submitted by bidders and proposed subcontractors only in connection with contracts and subcontracts which are subject to the equal opportunity clause. Contracts and subcontracts which are exempt from the equal opportunity clause are set forth in 41 CFR 60-1.5 (Generally only contracts or subcontracts of \$10,000 or under are exempt.)

Currently, Standard Form 100 (EEO-1) is the only report required by the Executive Orders or their implementing regulations.

Information concerning Standard Form 100 (EEO-1) is available from:

Joint Reporting Committee
P.O. Box 19100
Washington, D.C. 20036-9100

Proposed prime contractors and subcontractors who have participated in a previous contract or subcontract subject to the Executive Orders and have not filed the required reports should note that 41 CFR 60-1.7(b)(1) prevents the award of contracts and subcontracts unless such contractor submits a report covering the delinquent period or such other period specified by the Federal Highway Administration or by the Director, Office of Federal Contract Compliance, U.S. Department of Labor.

0000 MA SRI SZ15501C CMAQ-SRI-0(202)T
SALT RIVER PIMA-MARICOPA INDIAN COMMUNITY
(Longmore Rd; McDowell Rd. - Osborn Rd.)

R7/03

**CERTIFICATION WITH RESPECT TO THE
RECEIPT OF ADDENDA**

In the submission of a bid and by the signing of the Proposal, this will certify that the following numbered addenda issued on this project have been brought to my personal attention and furthermore that I understand and agree that those will be made a part of the Contract.

Addendum No. _____, _____, _____, _____, _____

PRINT NAME OF CONTRACTOR

SIGNATURE

TITLE

DATE

0000 MA SRI SZ15501C CMAQ-SRI-0(202)T
SALT RIVER PIMA-MARICOPA INDIAN COMMUNITY
(Longmore Rd; McDowell Rd. - Osborn Rd.)

AFFIDAVIT

**DISADVANTAGED BUSINESS ENTERPRISE
ASSURANCES**

The undersigned, fully cognizant of the requirements and of the goal established, hereby certifies that in the preparation of this bid for federal aid project

0000 MA SRI SZ15501C CMAQ-SRI-0(202)T
SALT RIVER PIMA-MARICOPA INDIAN COMMUNITY
(Longmore Rd; McDowell Rd. - Osborn Rd.)

(CHECK ONE)

_____ The established goal for DBE participation will be met and agreements have been made with certified DBEs, or

_____ The bidder has been unable to meet the goal prior to the submission of the bid and has made good faith efforts to do so.

THIS AFFIDAVIT MAY NOT BE REVISED OR CORRECTED AFTER SUBMISSION OF THE BID.

In accordance with the Special Provisions, the bidder shall specify its DBE participation on the "DBE Intended Participation Affidavit", or provide documentation of its good faith efforts, by 4:00 p.m. on the fifth working day following the bid opening. The apparent low bidder shall obtain the required affidavit from the Civil Rights Office, 1135 N. 22nd Avenue (second floor), Phoenix, AZ, 85009, following the opening of bids.

Print Name of Firm

Print Name of Authorized Officer of Firm

Signature of Authorized Officer of Firm

Title

Subscribed and sworn to before me this
_____ day of _____, 20_____

My commission expires:

Notary Public