



NO	DESCRIPTION OF REVISIONS	MADE BY	DATE
1	REVISED VIEW & REISSUED STANDARD DRAWING	RLF	5/12
2			
3			
4			

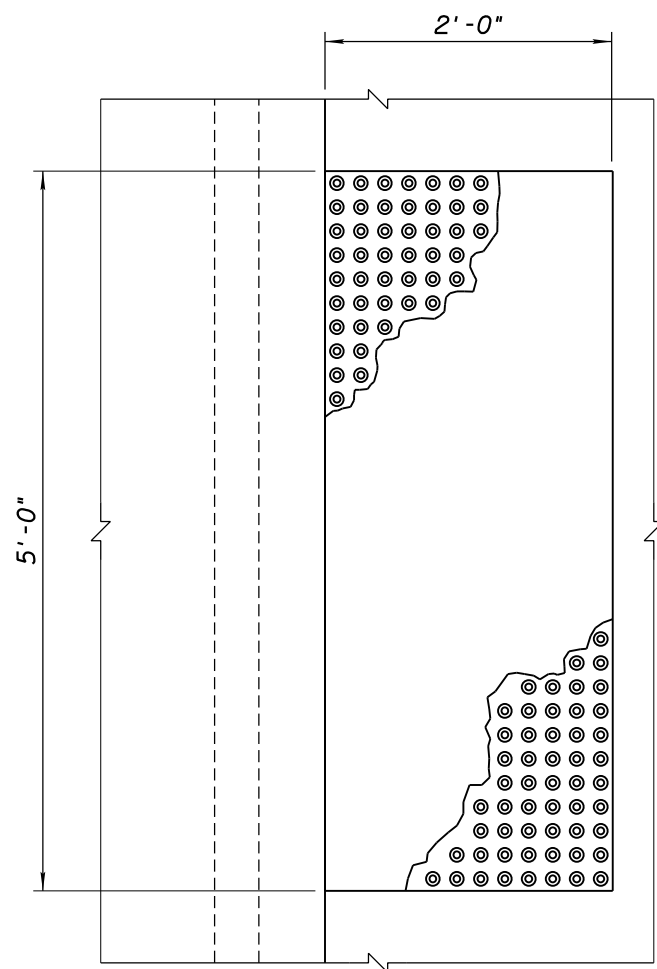


DETECTABLE WARNING STRIP

PLAN

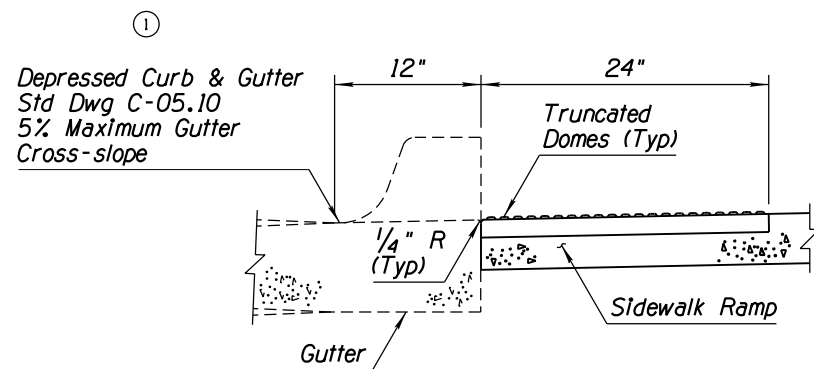


SECTION

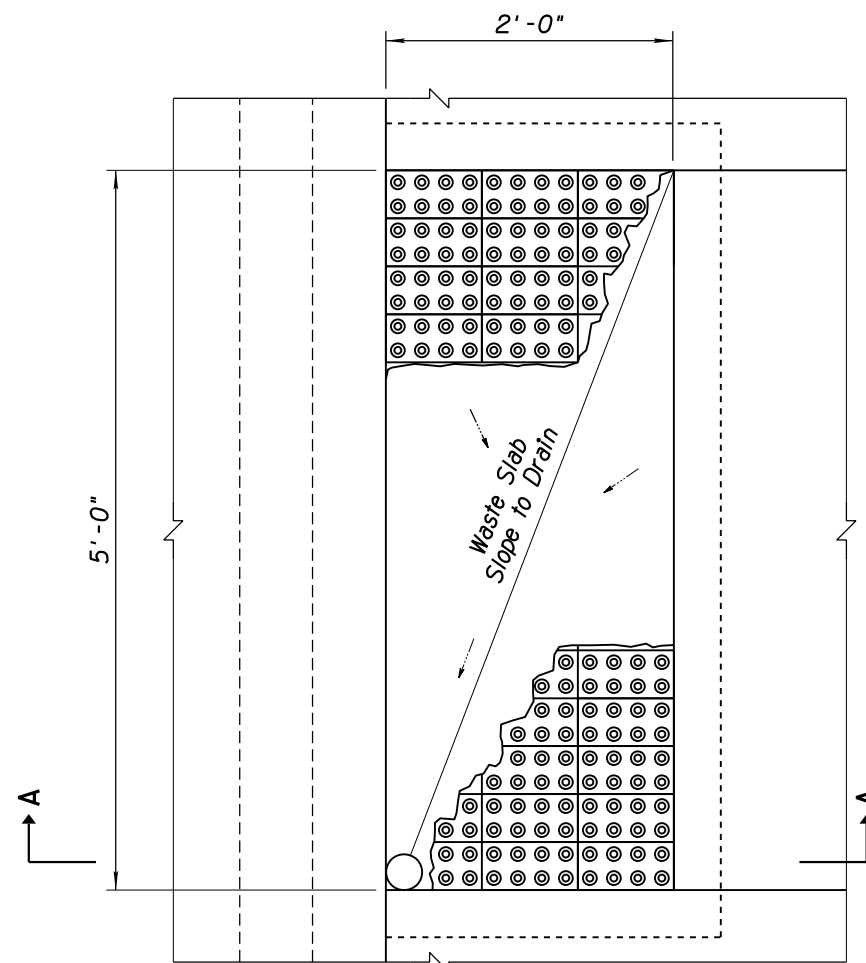

DETECTABLE WARNING STRIP  
BRICK OPTION

PLAN

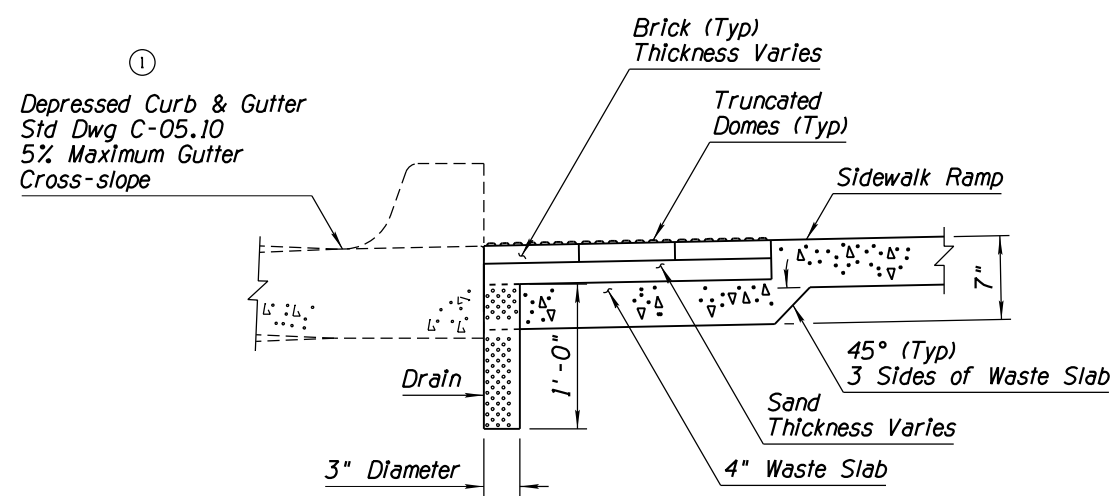

DETECTABLE WARNING STRIP  
BRICK OPTION


SECTION A-A

GENERAL NOTES


1. Drain shall be placed in low corner and filled with coarse aggregate (AASHTO N43 Size 7) securely tied in a long-life geotextile sack.

LEGEND


- 1/16" Minimum (Typ) (0.65 in. Minimum ADA Actual)
- ▲ 1 5/8" to 2 3/8" (Typ) (1.6 in. to 2.4 in. ADA Actual)
- 7/8" to 1 3/8" (Typ) (0.9 in. to 1.4 in. ADA Actual)
- 50% to 65% of ■

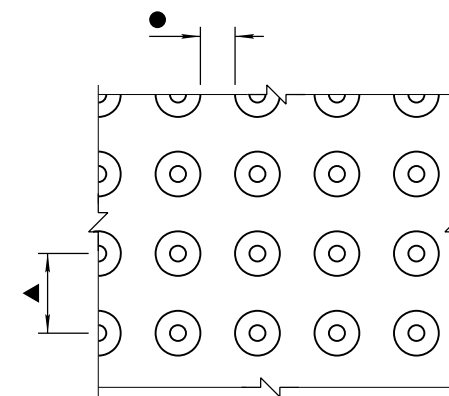

TEXTURE PATTERN DETAIL

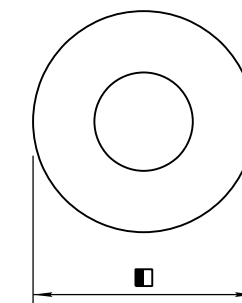

TRUNCATED DOME  
DETAIL



TRUNCATED DOME  
ELEVATION

DETECTABLE WARNING STRIP DETAIL

APPROVED FOR DESIGN 	STATE OF ARIZONA DEPARTMENT OF TRANSPORTATION ROADWAY STANDARD DRAWINGS	REV. 5/12
APPROVED FOR DISTRIBUTION 	SIDEWALK RAMP DETECTABLE WARNING STRIP	DRAWING NO. C-05.30 Sheet 7 of 7