



GENERAL NOTES


1. Transition median paving cross slope to meet level foundation pad. See plans for length and location.
 2. Compacted backfill and Class B concrete shall be placed between bridge columns or piers only.
- Slope as shown on Plans

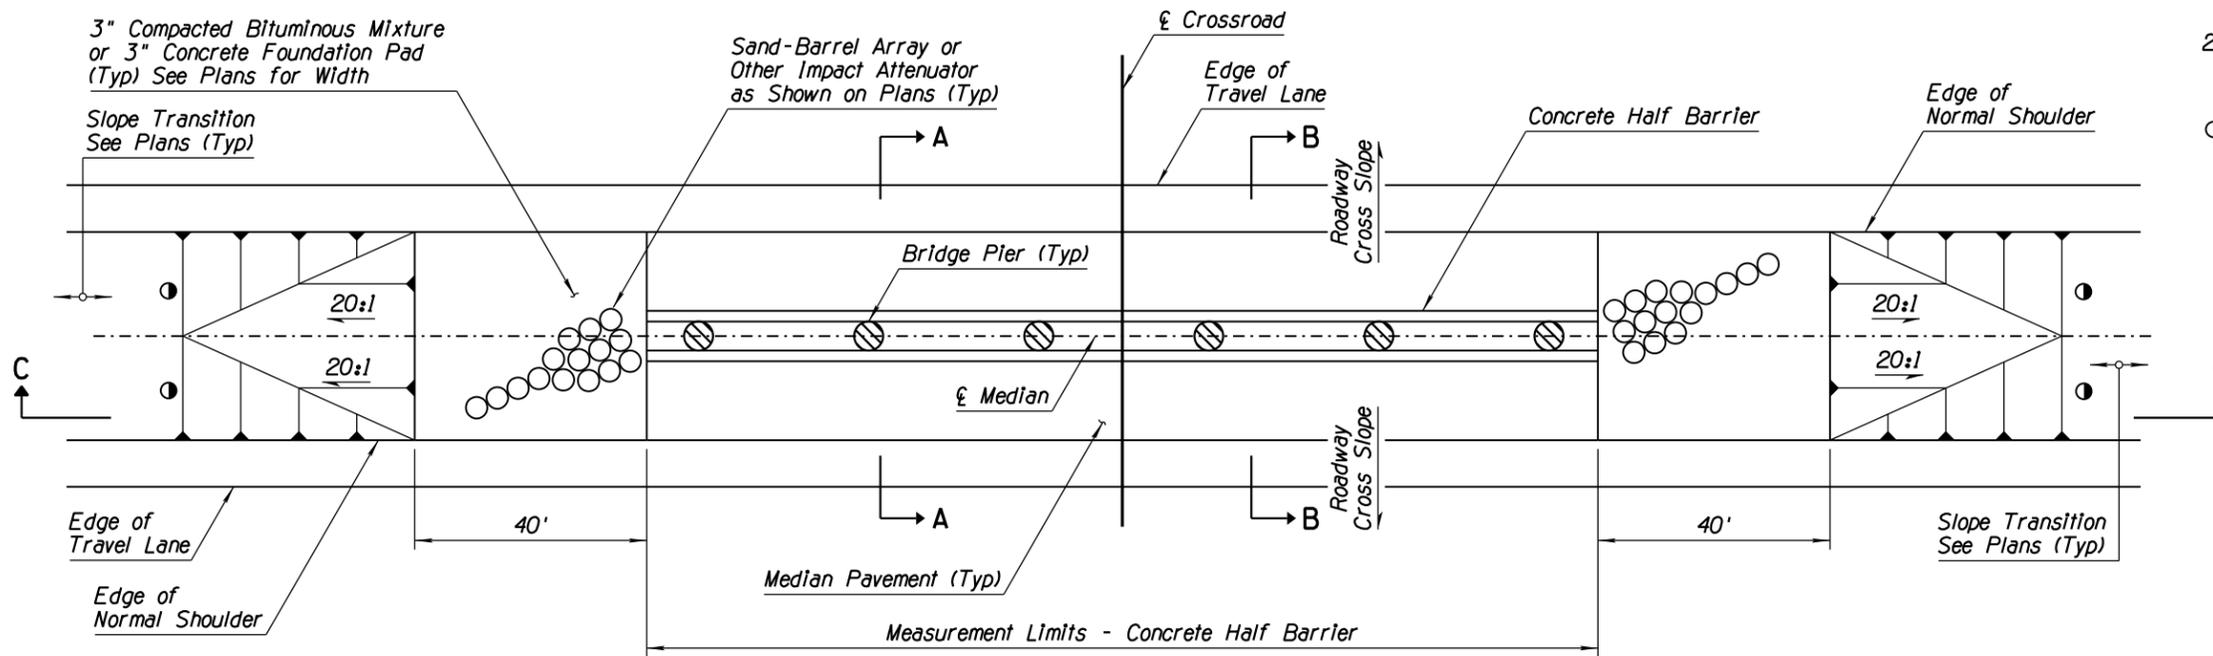


PLAN

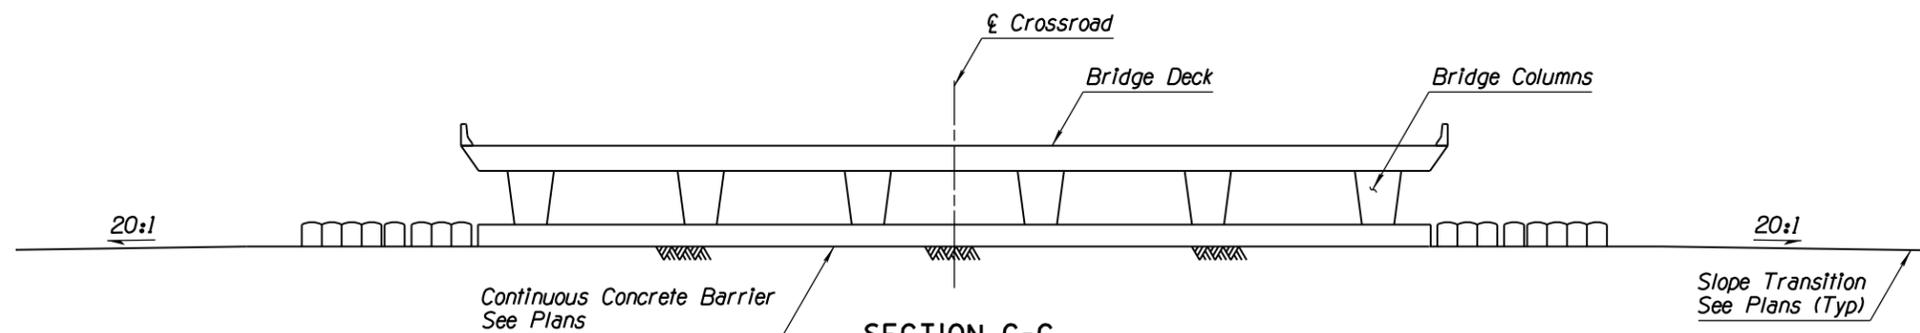

SECTION C-C

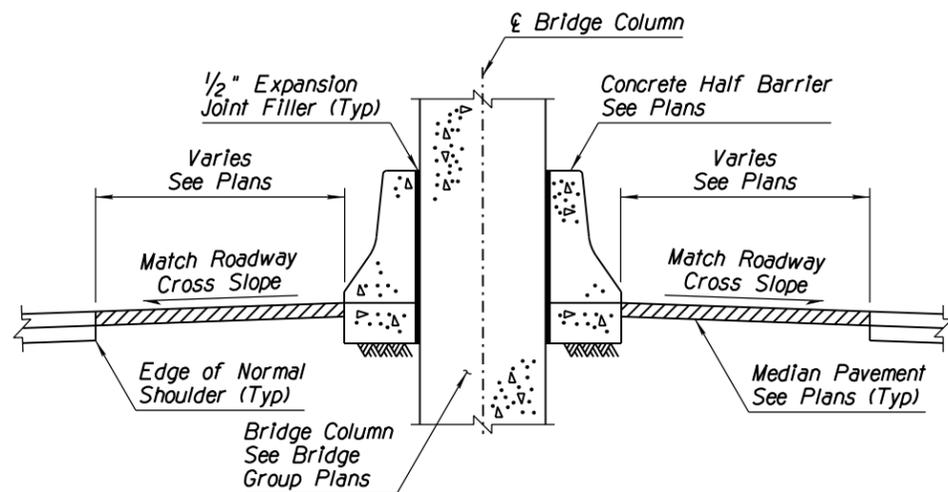

SECTION A-A

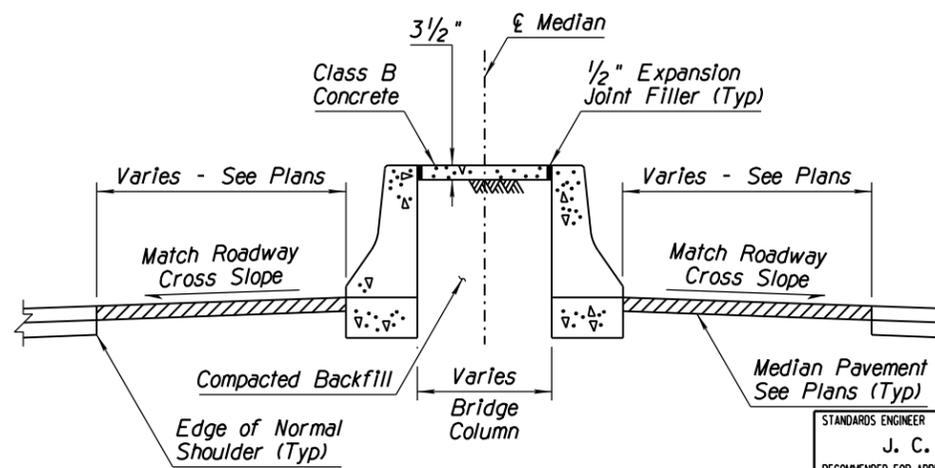

SECTION B-B

Note to Designer: The information presented in this Standard Drawing has been prepared in accordance with recognized engineering principles and is for general use. It should not be used for specific application without competent professional examination and verification of its suitability and applicability by a licensed professional engineer. Content's within the inner border line shall not be altered.

PRIOR DISTRIBUTION DATE 05/12

STANDARD ENGINEER	J. C. COOPER
RECOMMENDED FOR APPROVAL	
GROUP MANAGER	D. R. HENRY
APPROVED	
STANDARD COMMITTEE APPROVED FOR DISTRIBUTION	12/17 DATE

ARIZONA DEPARTMENT OF TRANSPORTATION INFRASTRUCTURE DELIVERY AND OPERATIONS DIVISION ROADWAY GROUP STANDARD DRAWING	
CONCRETE HALF BARRIER 32" TYPE 'F' AT PIERS LAYOUT	DRAWING NO. C-10.54 Sheet 3 of 3