

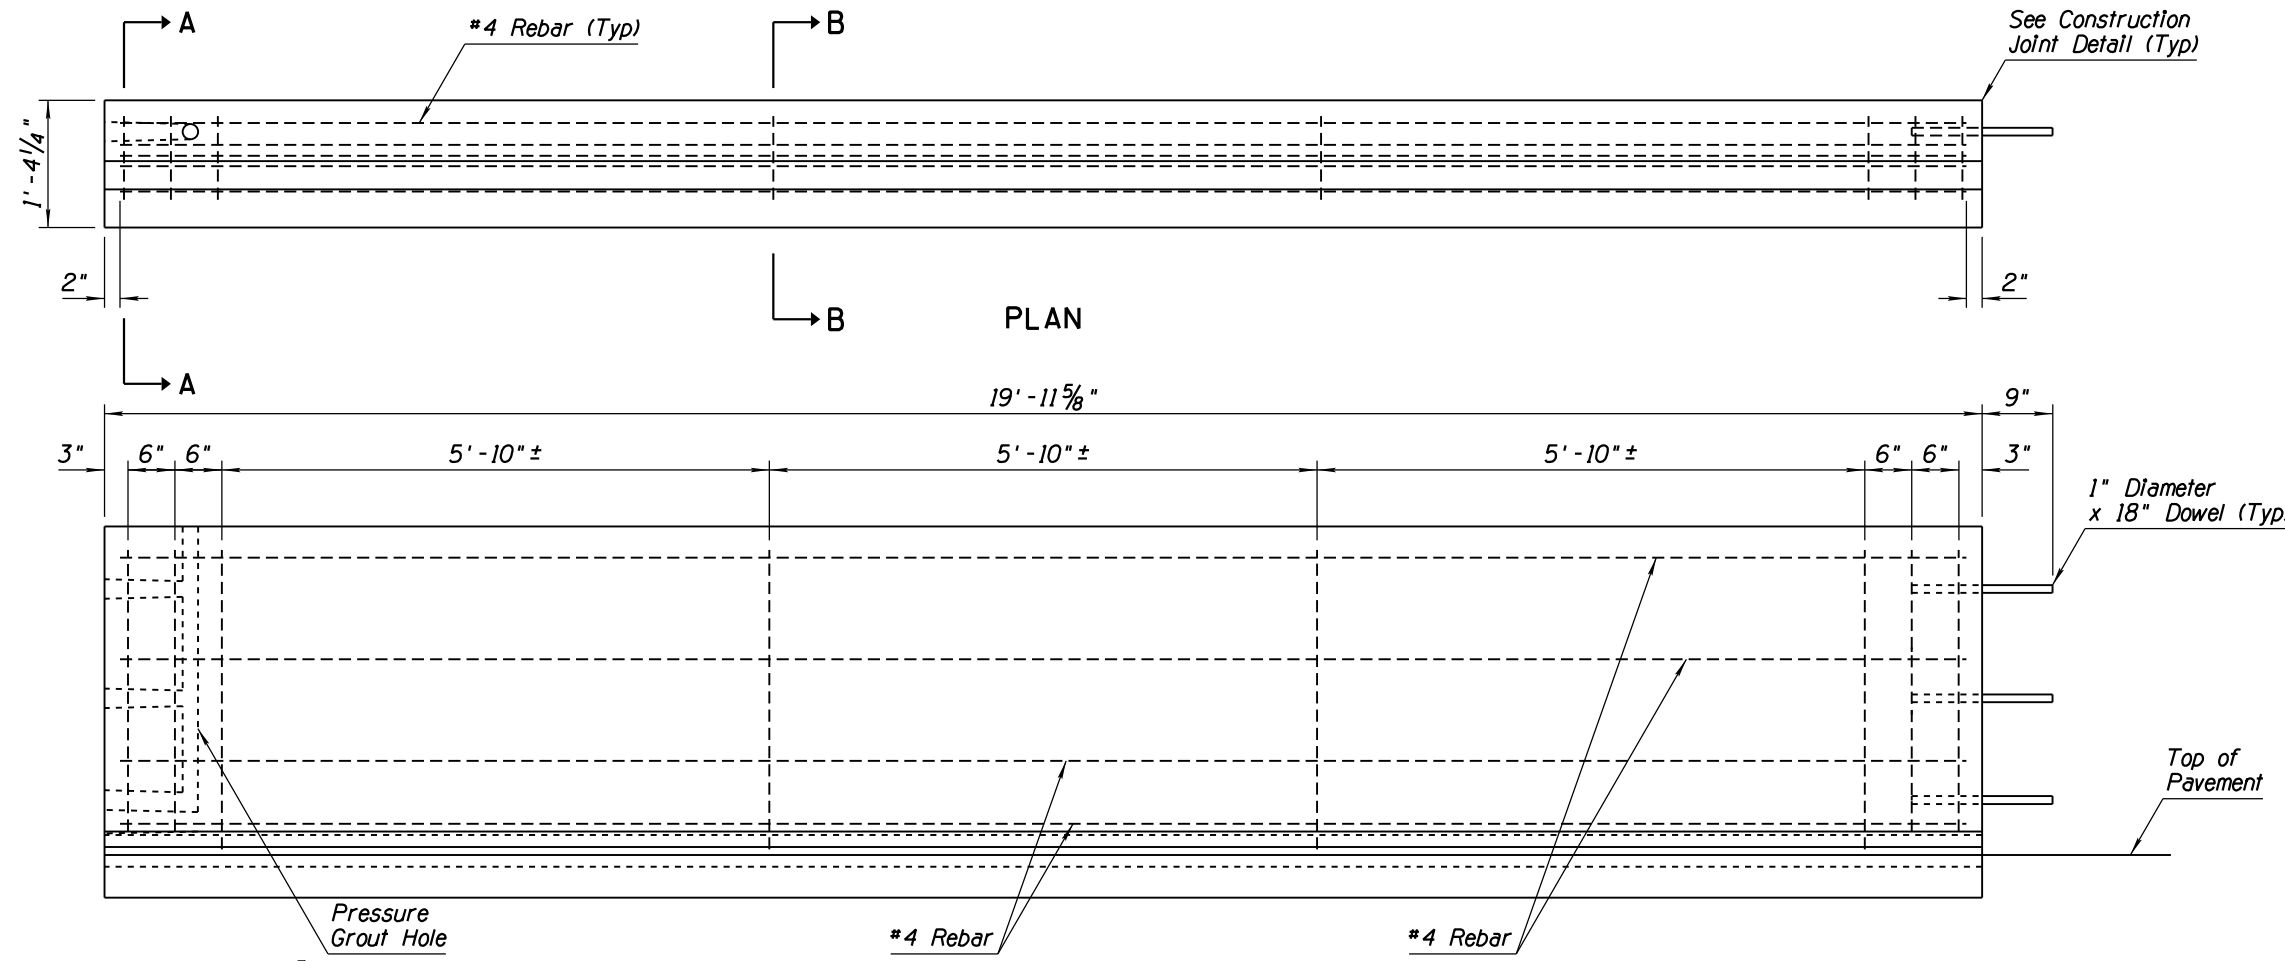
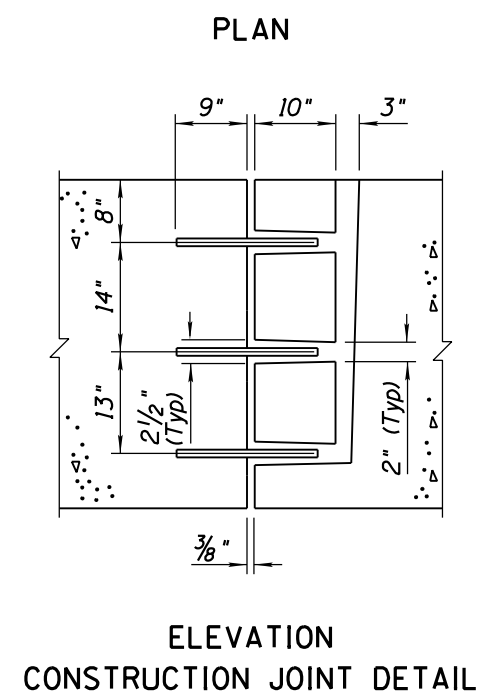
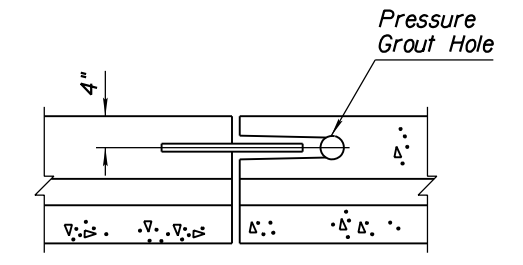
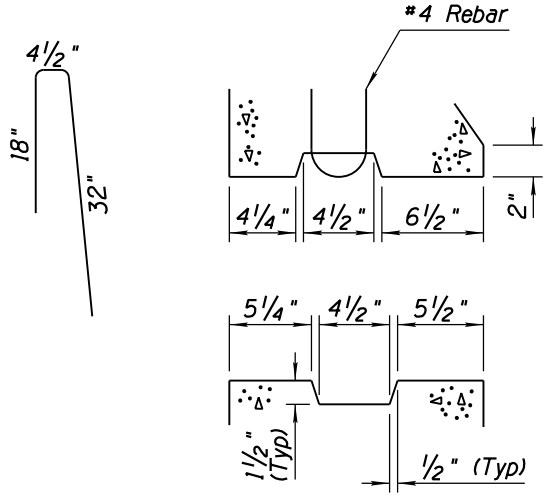


Note to Designer: The information presented in this Standard Drawing has been prepared in accordance with recognized engineering principles and is for general use. It should not be used for specific application without competent professional examination and verification of its suitability and applicability by a licensed professional engineer. Content's within the inner border line shall not be altered.

PRIOR DISTRIBUTION DATE 05/12

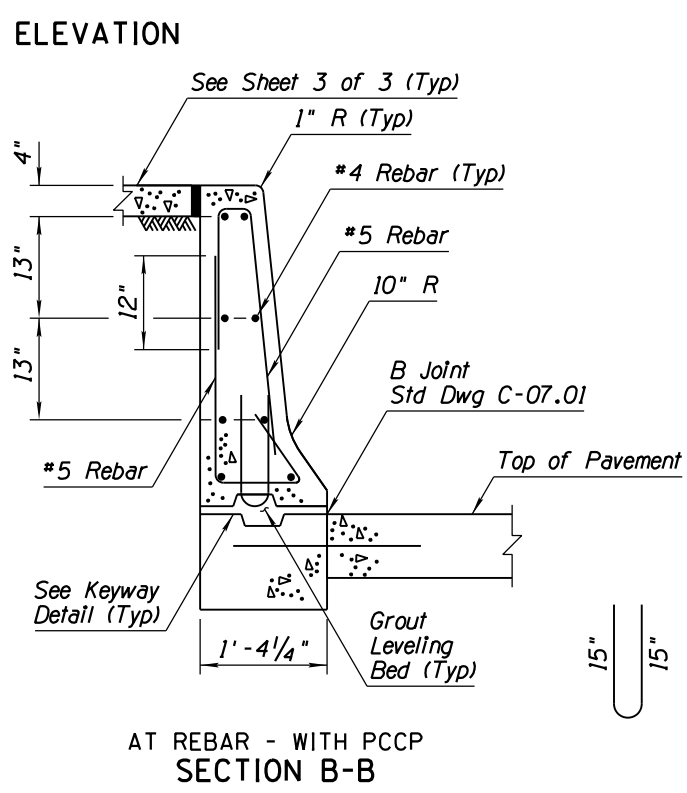

- ### GENERAL NOTES
- Barrier concrete shall be Class S,  $f'_c = 4500$  PSI.
  - Rebar shall be Grade 60.
  - The Half Barrier shall be placed upon a bed of grout in order to provide a uniform bearing.
  - Doweled joints shall be grouted under pressure until all of the openings and the joints are filled.
  - All bend dimensions for rebar are out-to-out of bars.
  - Rebar shall have 2" minimum clear cover unless otherwise noted.

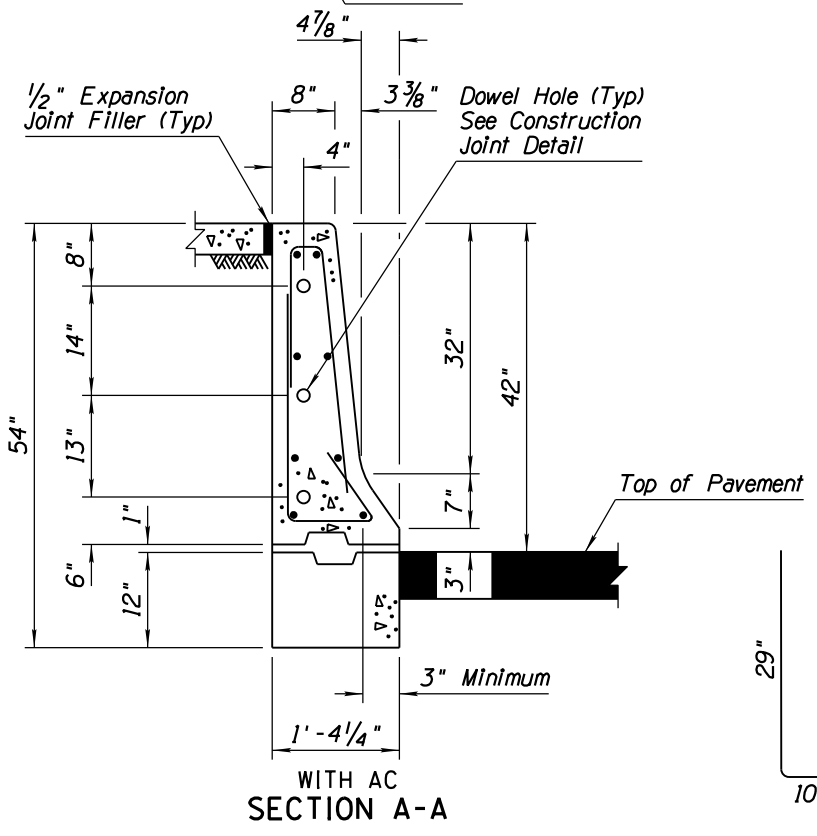

KEYWAY DETAIL

ELEVATION CONSTRUCTION JOINT DETAIL

AT REBAR - WITH PCCP SECTION B-B

STANDARDS ENGINEER J. C. COOPER	ARIZONA DEPARTMENT OF TRANSPORTATION INFRASTRUCTURE DELIVERY AND OPERATIONS DIVISION ROADWAY GROUP STANDARD DRAWING	
RECOMMENDED FOR APPROVAL GROUP MANAGER D. R. HENRY	CONCRETE HALF BARRIER 42" TYPE 'F' AT PIERS PRECAST	DRAWING NO. C-10.55
APPROVED STANDARDS COMMITTEE APPROVED FOR DISTRIBUTION	DATE 12/17	Sheet 2 of 3