



NO	DESCRIPTION OF REVISIONS	MADE BY	DATE
1	REMOVED RIGHT-OF-WAY MARKER DETAILS	RLF	11/07
2	REVISED GENERAL NOTE REFERENCE	RLF	11/07
3			
4			

GENERAL NOTES


1. Survey marker may be used with survey monument, and as bench or survey control marker.
2. Survey marker shall be made of brass and will be furnished by the Department. Cast-in lettering format may vary.
3. When used to define section lines, the marker shall be stamped in accordance with the BLM "Manual of Surveying Instructions" including the land surveyor's registration number.
4. For R/W marker information, refer to current ADOT R/W Plans Section R/W Monumentation Procedures and Standards.
5. Bench marks shall be established on headwalls, bridge walls and other permanent structures as directed by the Engineer.
6. Bench mark station, elevation, year, and/or other information shall be hand stamped in field, as approved by the Engineer.
7. Shank cross-sectional area shall be a minimum of 0.31 square inches and a maximum of 0.60 square inches. Shank cross-section may vary and is not a critical feature of this standard.
8. Shank geometry shall provide for secure anchorage in concrete.
9. Text shall not obscure survey point.

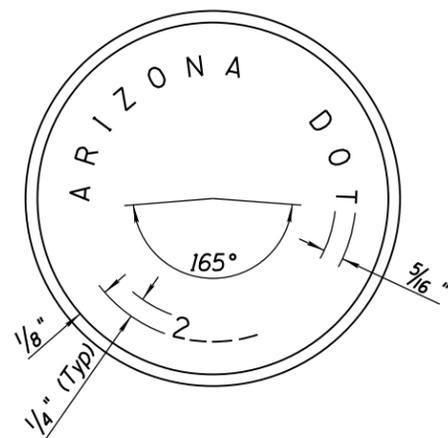

SURVEY MARKER (BENCH)

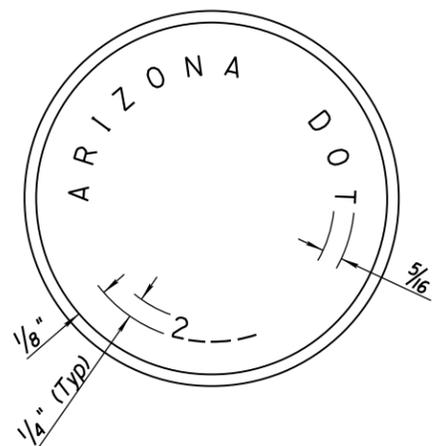

SURVEY MARKER

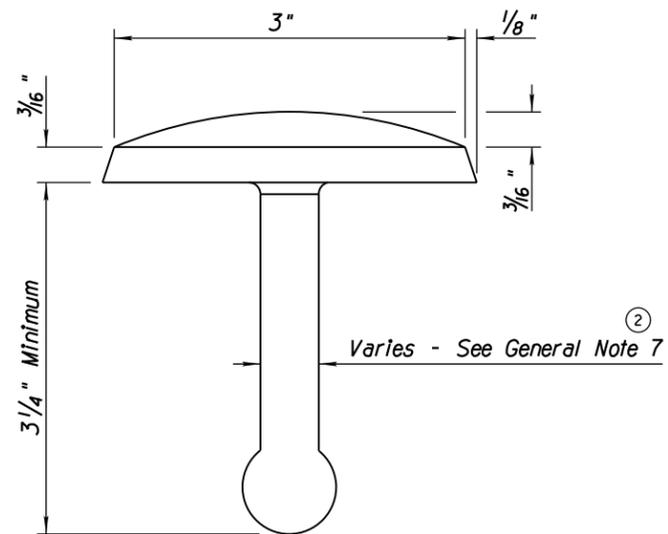

SURVEY MARKER

APPROVED FOR DESIGN 	STATE OF ARIZONA DEPARTMENT OF TRANSPORTATION ROADWAY STANDARD DRAWINGS	REV. 5/12
APPROVED FOR DISTRIBUTION 	SURVEY MARKER ①	DRAWING NO. C-21.20