

STATE OF ARIZONA
STATE HIGHWAY DEPARTMENT

PLANS DIVISION

1955


"D" stds.

ROADWAY STANDARDS

FOR USE IN

FIELD AND OFFICE

ISSUED TO

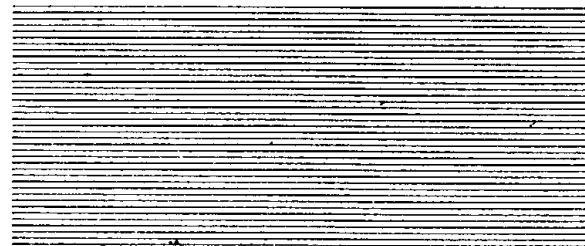

ARIZONA STATE HIGHWAY DEPARTMENT - PLANS DIVISION

INDEX TO DESIGN STANDARDS

SIGHT DISTANCE

[illegible]

CURVATURE

D2-1	SUPERELEVATION FOR CURVES AS RELATED TO DESIGN SPEEDS (CHART)	APR. 1941
D2-2	MINIMUM TURNING SPACE, CURVE WIDENING, AND CROWN TO SUPERELEVATION RUN-OFF	APR. 1941
D2-3	SUPERELEVATION TABLES (SUPPLEMENT TO DRWG NO D2-1)	JUNE 1947

TRANSITION SPIRALS

[illegible]

REGULATION OF ROADSIDE DEVELOPMENTS

[illegible]


DRAFTING OF PLANS & PROFILE, OFFICE PROCEDURE , ETC.

[illegible]


MISCELLANEOUS CRITERIA AFFECTING DESIGN REQUIREMENTS

[illegible]

SAFE STOPPING DISTANCE

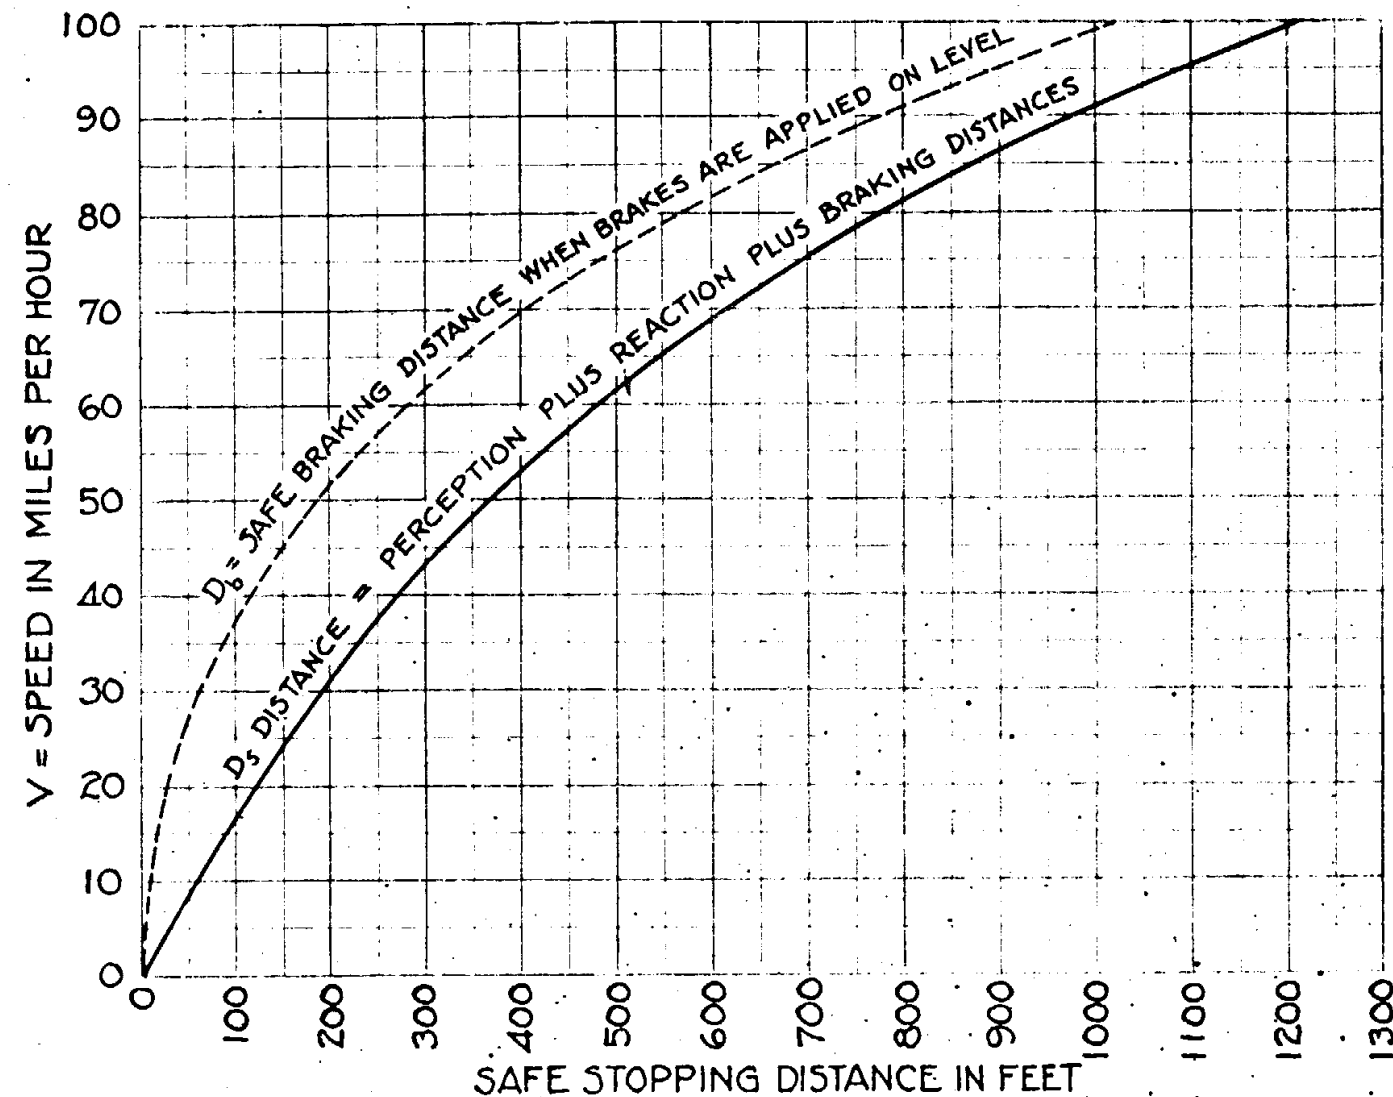

MINIMUM PASSING SIGHT DISTANCE

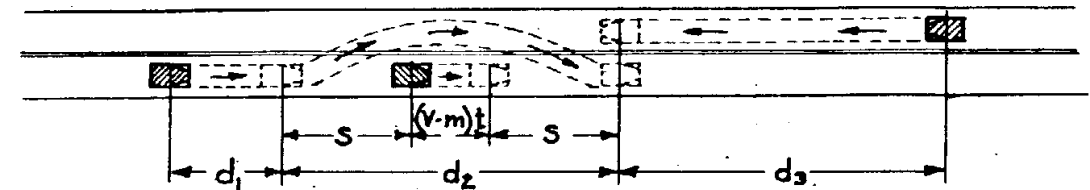

FORMULAE AND DEVELOPMENT OF FIGURES FOR TWO-LANE MINIMUM PASSING SIGHT DISTANCE

V	Assumed M.P.H. Design Speed	30			40			50			60			70			M.P.H.
m	Difference between V and Speed of 7	10	15	20	10	15	20	10	15	20	10	15	20	10	15	20	
V-m	Speed of Passed Vehicle	20	15	10	30	25	20	40	35	30	50	45	40	60	55	50	
S=V-m+20	Spacing in feet	40	35	30	50	45	40	60	55	50	70	65	60	80	75	70	
a	Acceleration rate M.P.H.P.S.	2.6	2.9	3.2	2.1	2.3	2.6	1.7	1.9	2.1	1.3	1.4	1.7	1.0	1.1	1.3	
$t = \sqrt{\frac{2.73S}{a}}$	Time in Seconds	6.5	5.7	5.0	8.1	7.3	6.5	9.8	8.9	8.1	12.1	11.3	9.8	14.8	13.6	12.1	
$d_1 = 4.4(V-m)$		88	66	44	132	110	88	176	154	132	220	198	176	264	242	220	
$d_2 = 2S + 1.47(V-m)t$		270	195	134	455	358	270	696	568	455	1028	876	696	1460	1250	1028	
$d_3 = 1.47Vt$		285	251	220	473	439	382	719	654	596	1068	1000	863	1512	1400	1245	
$d = d_1 + d_2 + d_3$		643	512	398	1060	907	740	1595	1376	1183	2316	2074	1735	3236	2892	2593	
EXPRESSED IN FEET																	

IN THE CASE OF THREE-LANE HIGHWAYS d_3 IS DROPPED AND $d = d_1 + d_2$

When $d = d_1 + d_2$	358	261	178	587	468	358	872	722	587	1248	1074	872	1724	1692	1248	
----------------------	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	-----	------	------	------	--

IN THE CASE OF FOUR-LANE HIGHWAYS MINIMUM PASSING SIGHT DISTANCE IS LIMITED ONLY BY TOTAL SAFE STOPPING DISTANCE D_s (See Stopping Distance - Left)

NOTE: To calculate passing of two vehicles instead of one as illustrated above, the formulae for t and d_2 are modified as follows: $t = \sqrt{\frac{4.08S}{a}}$, and $d_2 = 3S + 1.47(V-m)t$.

A.A.S.H.O. 1940 APPROVED CONCLUSIONS REGARDING MINIMUM SIGHT DISTANCES

Passing minimums - Height of eye 4.5' - object 4.5'
Non-passing minimums - Height of eye 4.5' - object 4 inch

ASSUMED DESIGN SPEED M.P.H.	MINIMUM NON-PASSING SIGHT DIST. FEET	MINIMUM PASSING SIGHT DISTANCES FOR TWO-LANE HIGHWAYS DESIRABLE FEET	MINIMUM PASSING SIGHT DISTANCES ABSOLUTE FEET	FOR THREE-LANE HIGHWAYS DESIRABLE FEET	FOR THREE-LANE HIGHWAYS ABSOLUTE FEET
30	200	600	500		
40	275	1100	900		
50	350	1600	1400		
60	475	2300	2100	1100	900
70	600	3200	2900	1500	1300
				2000	1800

Note: Figures below based on passing two vehicles.

ARIZONA STATE HIGHWAY DEPARTMENT - REV. PLANS DIVISION

SAFE STOPPING DISTANCES AND MINIMUM PASSING DISTANCES AS RELATED TO DESIGN SPEED

CALCULATED AND DRAWN - MARCH 1941
BY LESLIE McDUGALL - HIGHWAY DESIGNER

CHECKED BY
APPROVED BY
ENGINEER OF PLANS

STANDARD DRWG. NO. D 1-1

NOTES:


When a highway is on a grade the formula for braking distance is modified to result in the following: $D_b = \frac{V^2}{30(f \pm \text{grade})}$ in which "grade" is percent of grade $\div 100$

The formulae and tabulations shown here with respect to Minimum Sight Distances and Safe Stopping Distances conform to A.A.S.H.O. Policy on Sight Distance For Highways - 1940

The figures shown here apply to normal road surfaces including wetness but not to conditions of mud, snow, or ice.

ASSUMED DESIGN SPEED		PERCEPTION PLUS REACTION		BRAKING			TOTAL SAFE STOPPING DIST. FEET $D_s = D_R + D_b$
M.P.H. V	FT. PER SEC.	SECONDS	FEET D_R	COEFFICIENT OF FRICTION SKIDDING	FACTOR OF SAFETY	SAFE COEFFICIENT OF FRICTION f	
10	14.67	3.5	51	0.68	1.25	0.55	57
20	29.3	3.25	95	0.65	1.25	0.525	120
30	44	3.0	132	0.62	1.25	0.50	192
40	59	2.75	162	0.59	1.25	0.475	274
50	73	2.50	183	0.56	1.25	0.45	368
60	88	2.25	198	0.53	1.25	0.425	481
70	103	2.0	206	0.50	1.25	0.40	614
80	117	1.75	205	0.47	1.25	0.375	775
90	132	1.50	198	0.44	1.25	0.35	969
100	147	1.25	183	0.41	1.25	0.325	1208

PLAN DIAGRAM - HEADLIGHT REALM OF VISIBILITY - NIGHT DRIVING

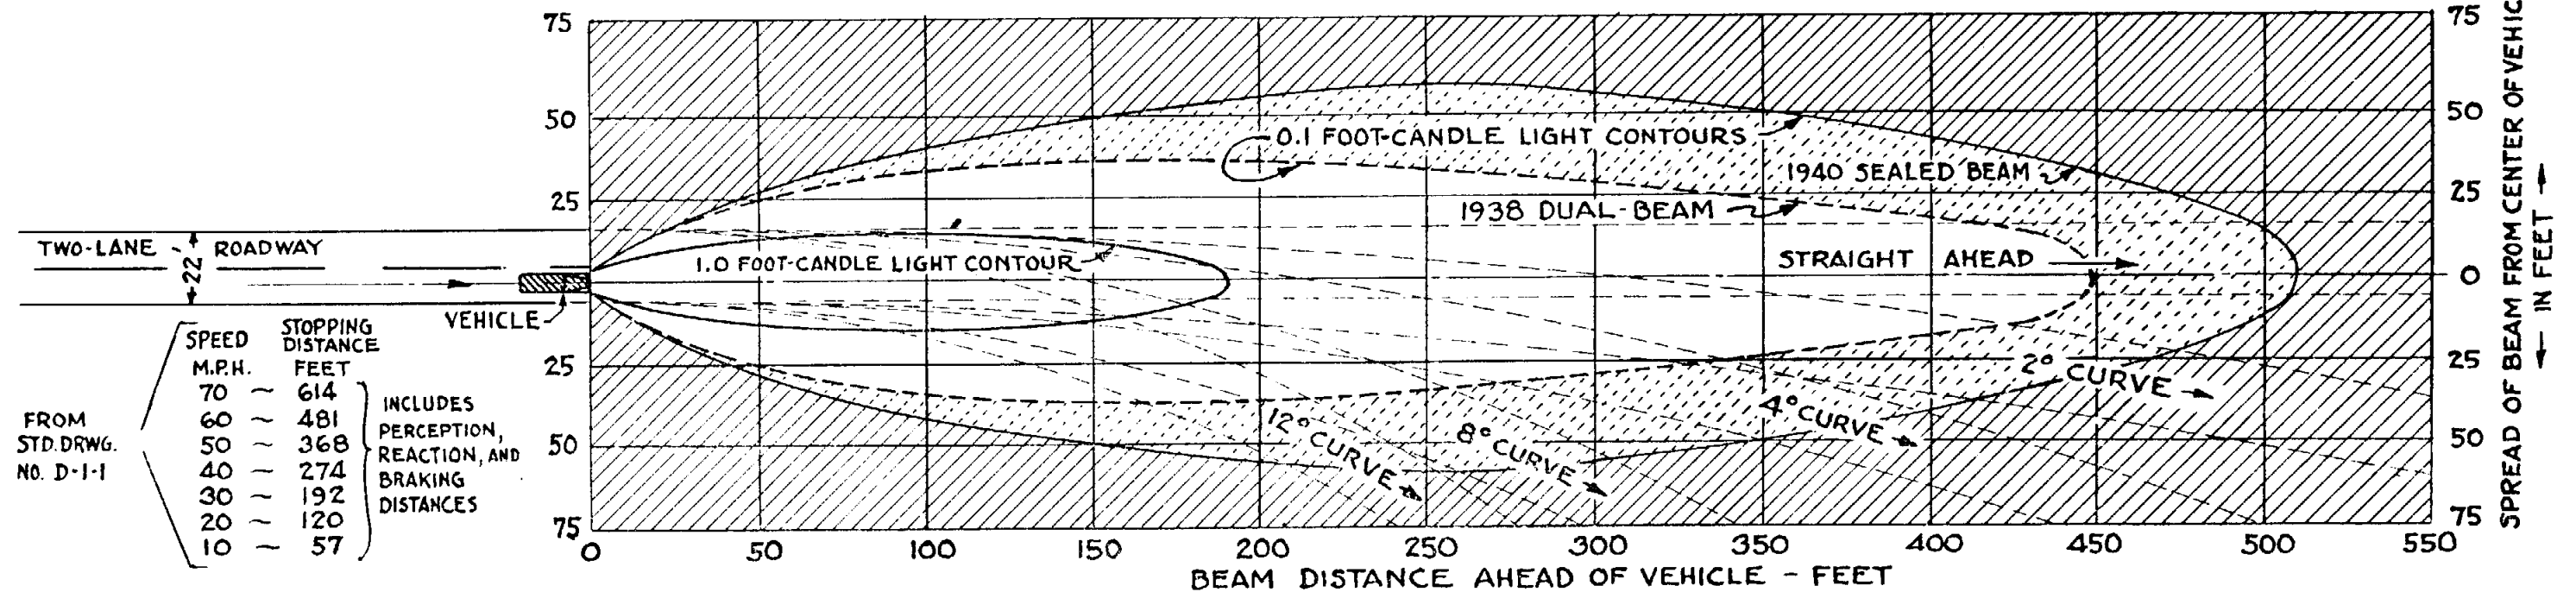

NOTES :


OBJECTS OUTSIDE OF THE 0.1 FOOT-CANDLE LIGHT CONTOUR ARE OBSCURE.

HEADLIGHT CONTOURS ARE BASED ON DATA CONTAINED IN A REPORT OF A COOPERATIVE INVESTIGATION BY COMMITTEE ON CURVATURE AND SPEED, HIGHWAY RESEARCH BOARD ; COMMITTEE ON SPEED REGULATION , NATIONAL SAFETY COUNCIL ; AND THE HIGHWAY RESEARCH STAFF, IOWA ENGINEERING EXPERIMENT STATION . PRESENTED AT HIGHWAY RESEARCH BOARD MEETING 1940.

PASSENGER VEHICLE ACCELERATION AND DECELERATION CHART

CALCULATED FROM A.A.S.H.O. RESEARCH DATA SECURED 1937

ROAD CONDITION - HARD SURFACE AND NO GRADE

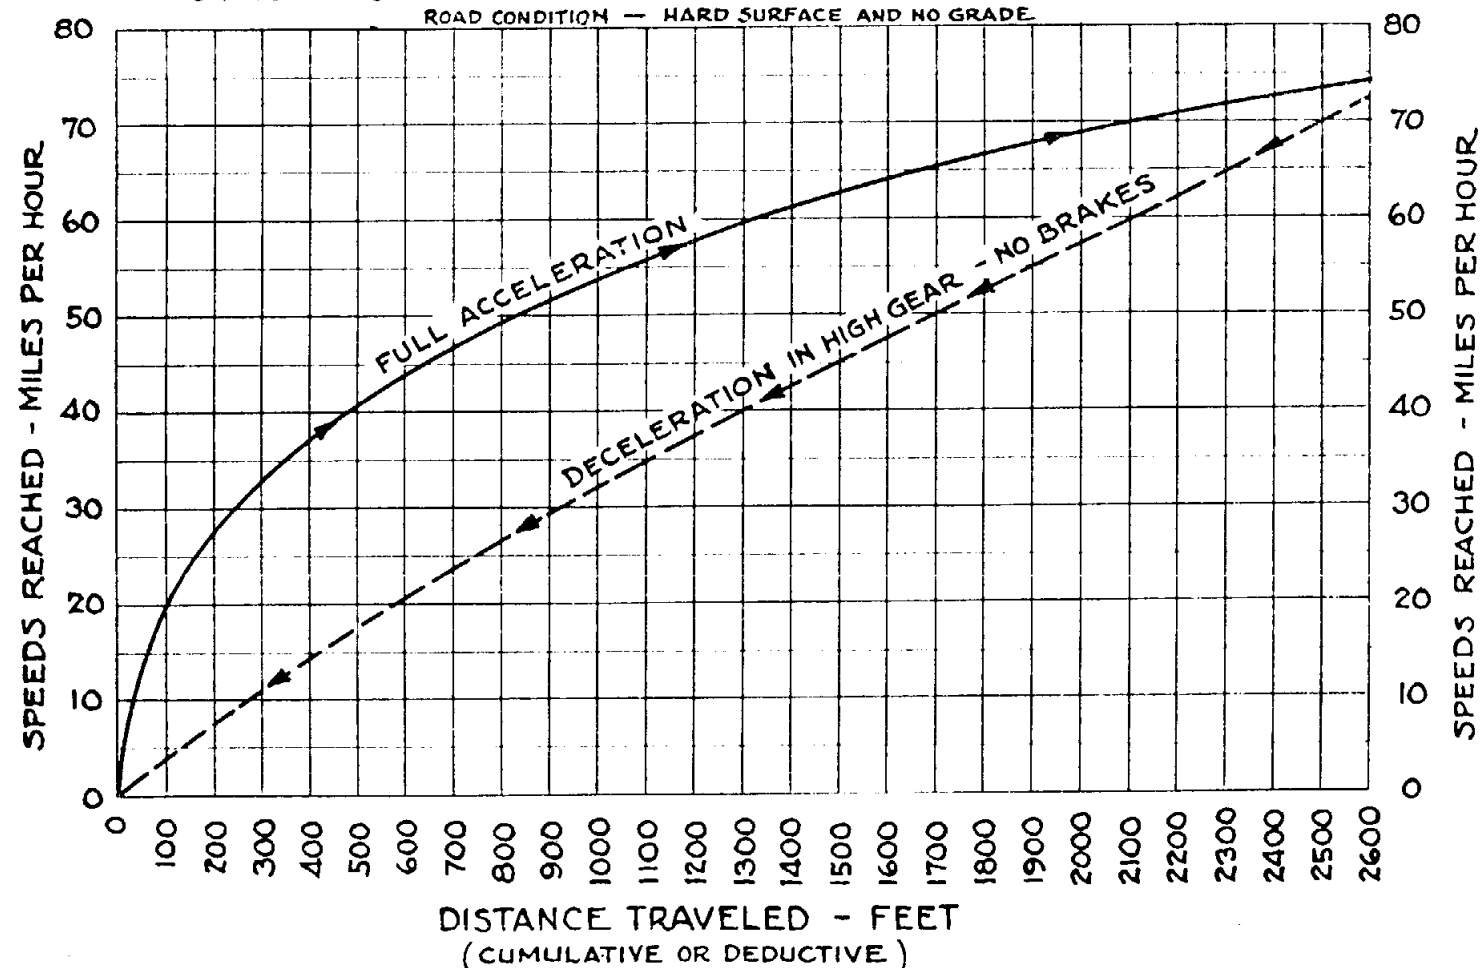

GENERAL NOTE :

AVAILABLE RESEARCH DATA UPON WHICH THIS DRAWING IS BASED ARE MEAGRE . A MORE ABUNDANT AND EXACTING RESEARCH ON THESE SUBJECTS IS INDISPENSABLE TO GREATER ACCURACY IN CALCULATIONS.

ARIZONA STATE HIGHWAY DEPARTMENT
PLANS DIVISION

ACCELERATION & DECELERATION
CHART, AND DIAGRAM SHOWING
VISIBILITY WITH HEADLIGHTS AT NIGHT

CALCULATED AND DRAWN JUNE 1941
BY LESLIE MCDUGALL, HIGHWAY DESIGNER

STANDARD DRWG. NO.

CHECKED BY

APPROVED BY
ENGINEER OF PLANS *H.H. Wessel*

D 1-2

REV.

ASSUMPTIONS

V_a AND V_b = APPROACH SPEEDS IN M.P.H. OF VEHICLES AT "A" AND "B" RESPECTIVELY.


d_a AND d_b = SAFE STOPPING DISTANCES CORRESPONDING TO V_a AND V_b .

a = DISTANCE FROM PATH OF "A" TO OBSTRUCTION, MEASURED PARALLEL TO PATH OF "B".

a = DISTANCE FROM PATH OF A TO OBSTRUCTION, MEASURED PARALLEL TO WIND.
b = " " " " "B" " " " " " " " " "OF A".

ALL DISTANCES EXPRESSED IN FEET .


NOTE : TO CONVERT a AND b INTO PERPENDICULAR DISTANCES
MULTIPLY EACH BY THE SINE OF ANGLE Δ°

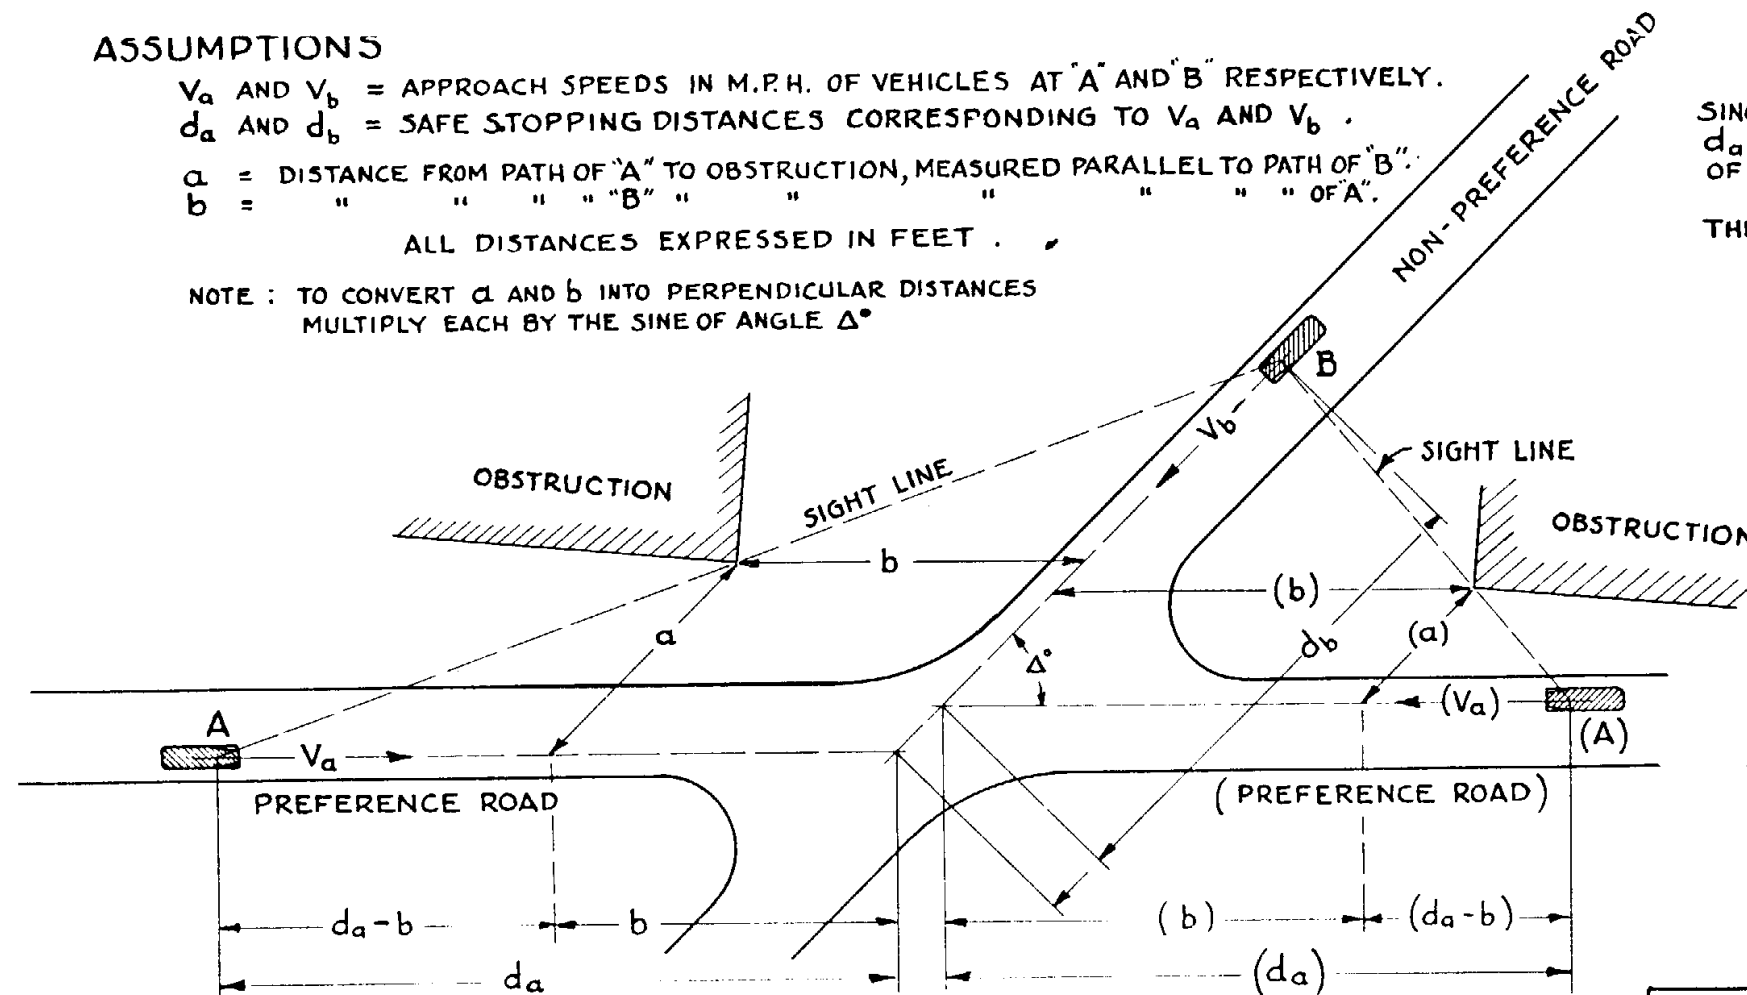

FORMULA

SINCE THE TRIANGLE FORMED BY SIDES d_a , d_b , AND SIGHT LINE, IS SIMILAR TO THAT OF THE TRIANGLE d_a-b , a , AND PART OF SIGHT LINE,

$$\text{THEN } \frac{d_b}{d_a} = \frac{a}{d_a - b}, \text{ OR } d_b = \frac{a \cdot d_a}{d_a - b}$$

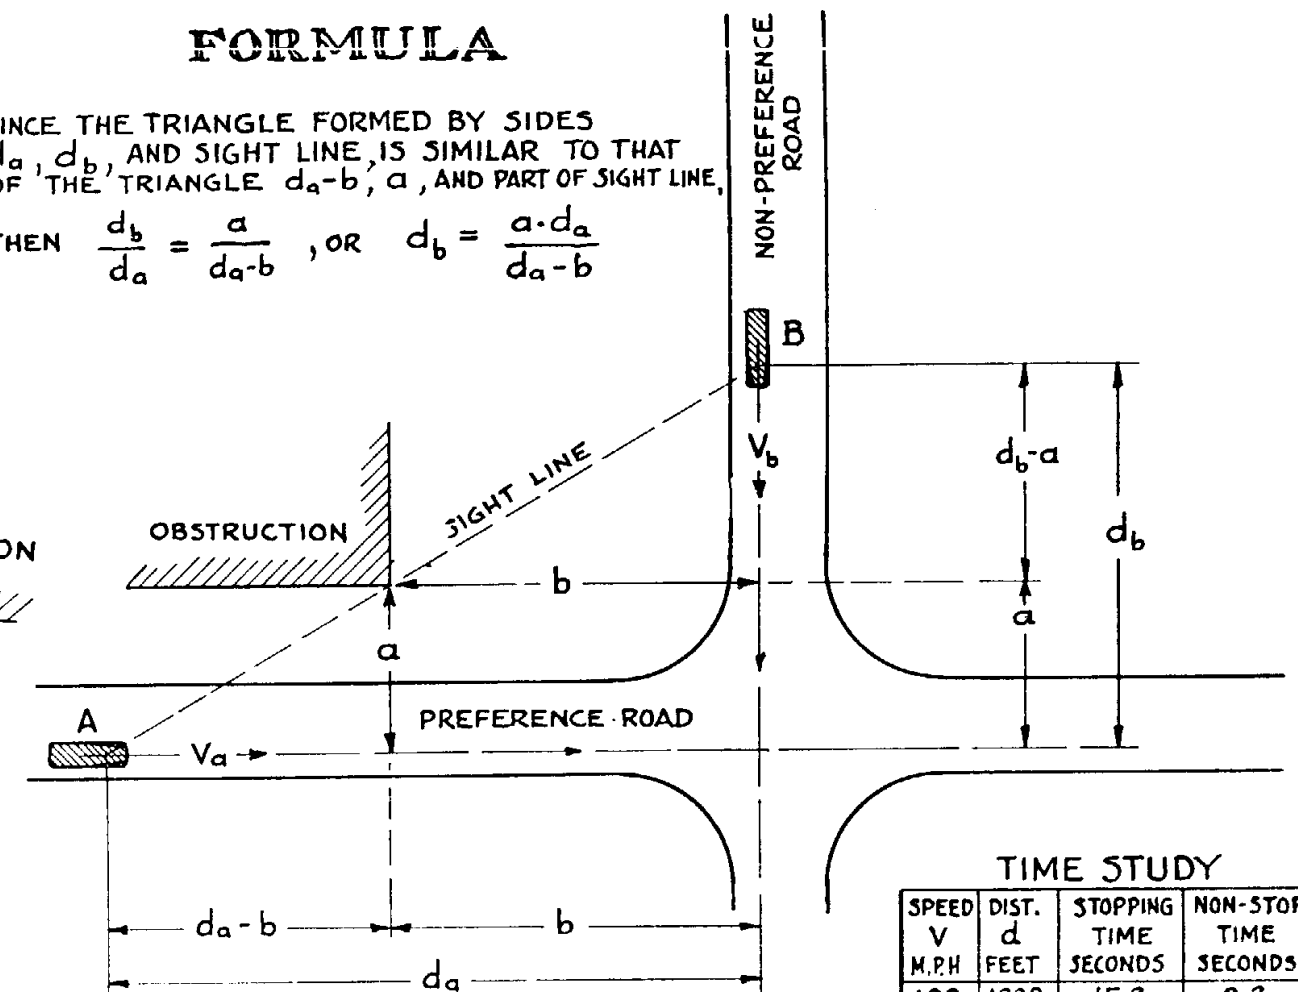


TIME STUDY

SPEED V M.P.H	DIST. d FEET	STOPPING TIME SECONDS	NON-STOP TIME SECONDS
100	1208	15.2	8.2
90	969	13.2	7.3
80	775	11.7	6.6
70	614	9.9	6.0
60	481	8.7	5.5
50	368	7.6	5.0
40	274	6.6	4.6
30	192	5.7	4.4
20	120	5.0	4.1
10	57	4.3	3.9

AT INTERSECTIONS NOT COVERED BY OTHER CRITERIA SUCH AS 10:1 TRAFFIC VOLUME RATIO, OR BY BLANKET REGULATIONS, THE FOLLOWING RULE IS ADVISABLE AS A SAFETY PRECAUTION :
WHEN DESIGN OR APPROACH SPEED " V_a " ON PREFERENCE ROAD EXCEEDS 30 M.P.H. AND RELATED SIGHT OBSTRUCTIONS RESTRICT " V_b " ON NON-PREFERENCE ROAD TO 10. M.P.H. OR LOWER, IT IS ADVISABLE TO REQUIRE ALL TRAFFIC ON THE NON-PREFERENCE ROAD TO STOP BEFORE ENTERING OR CROSSING PREFERENCE ROAD, PENDING IMPROVEMENTS INCREASING SIGHT DISTANCE.

- INTER-RELATION OF V_a , V_b , a , AND b WHEN RELATION OF V TO $d = \gamma$

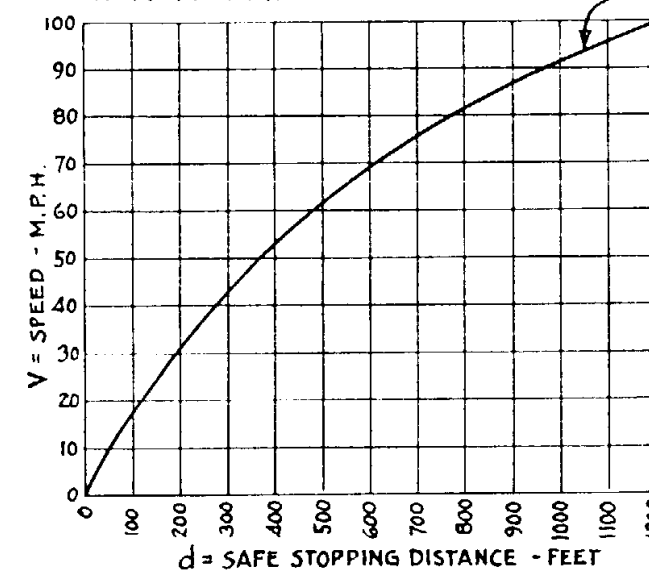

NOTE :

NOTE: THE DIAGRAMS, CHARTS, AND FORMULA SHOWN ON THIS DRAWING CONFORM TO 1940. A.A.S.H.O. POLICY ON INTERSECTIONS AT GRADE.

ARIZONA STATE HIGHWAY DEPARTMENT
PLANS DIVISION

**MINIMUM SAFE SIGHT RESTRICTIONS AT INTERSECTIONS
AS RELATED TO INTERSECTION APPROACH SPEEDS ON
PREFERENCE ROAD AND ON NON-PREFERENCE ROAD,
BASED ON AVAILABLE SAFE STOPPING DISTANCES**

REV.

CALCULATED AND DRAWN APRIL 1940
BY LESLIE McDougall - HIGHWAY DESIGNER

TRACED BY L.MCD.

CHECKED BY


APPROVED BY


ENGINEER OF PLANS

STANDARD DRWG. NO.

D 1-3

**NON - STOP
INTERSECTION**

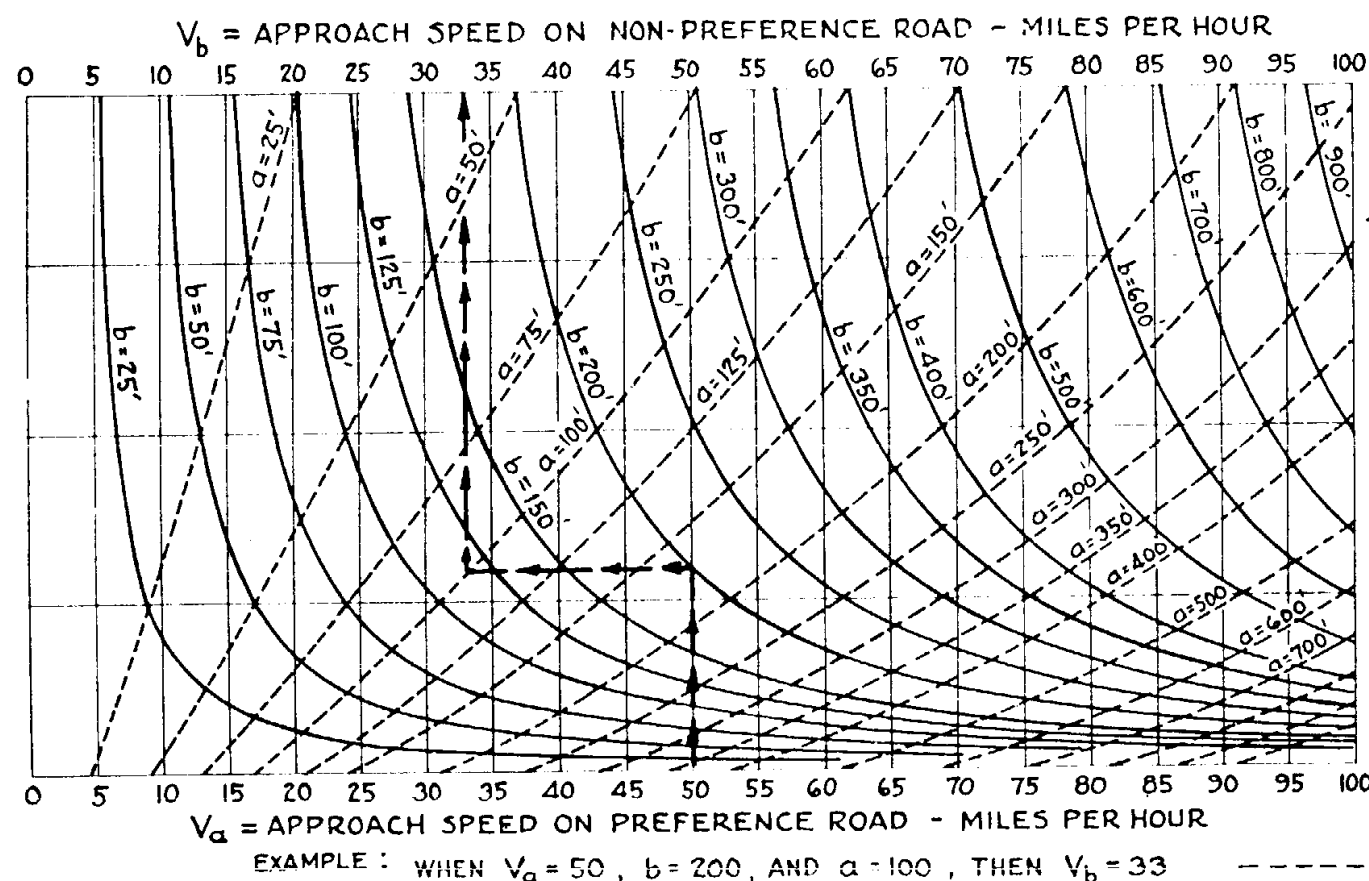

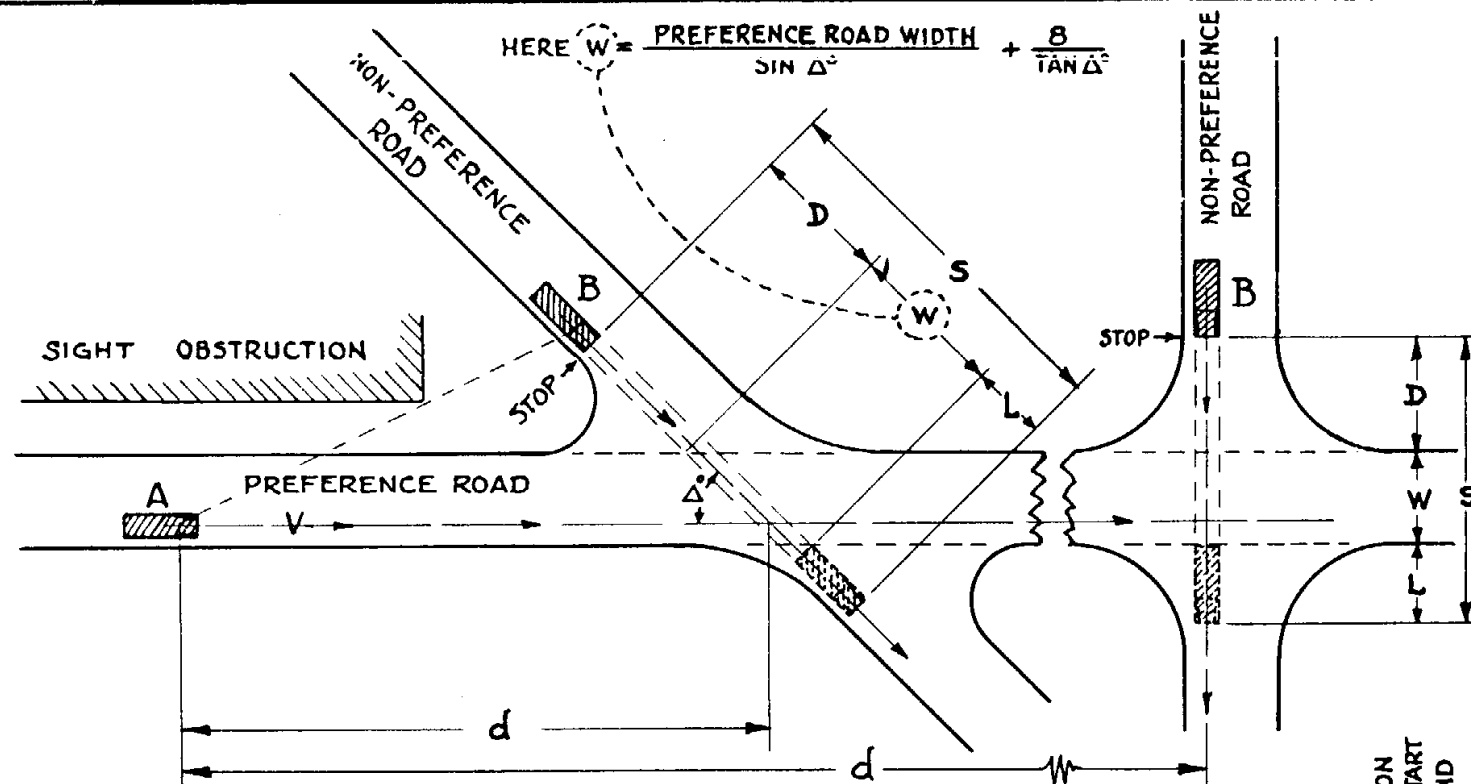

FORMULA

VEHICLE AT "A" TRAVELS NON-STOP AT DESIGN SPEED OF PREFERENCE ROAD.
VEHICLE AT "B" STARTS FROM STOPPED POSITION ON NON-PREFERENCE ROAD AND TRAVELS DISTANCE "S" IN THE TIME "t" IT TAKES VEHICLE "A" TO TRAVEL DISTANCE "d"




LET :

D = DISTANCE FROM NEAR EDGE OF PAVEMENT TO FRONT OF VEHICLE "B" WHEN STOPPED, IN FEET.
W = WIDTH OF PAVEMENT ALONG PATH OF CROSSING VEHICLE "B" - IN FEET
L = OVER-ALL LENGTH OF VEHICLE "B" - IN FEET (SEE TABULATION LISTING VARIOUS DESIGN LENGTHS)
S = THE DISTANCE VEHICLE "B" MUST TRAVEL TO BE CLEAR OF TRAFFIC ON PREFERENCE ROAD, $S = D + W + L$.
t = THE REQUIRED TIME TO ACCOMPLISH "S", IN SECONDS.
a = THE AVERAGE OVER-ALL RATE OF ACCELERATION FROM A STOPPED POSITION - MILES PER HOUR PER SECOND.
K = THE SUM OF PERCEPTION TIME AND TIME REQUIRED TO SHIFT TO FIRST GEAR. ASSUMED AT 2 SECONDS.
V = THE DESIGN SPEED ON THE PREFERENCE ROAD, IN MILES PER HOUR. $V = d \div 1.47 t$
d = THE MINIMUM SIGHT DISTANCE FROM "A" TO INTERSECTION, IN FEET. $d = 1.47 V t$


THEN: $t = K + \sqrt{\frac{2S}{1.47a}}$, OR $t = K + \sqrt{\frac{1.36S}{a}}$, OR $t = 2 + \sqrt{\frac{1.36S}{a}}$

AND: $d = 1.47 V \left[2 + \sqrt{\frac{1.36S}{a}} \right]$, OR $V = \frac{d}{1.47 \left[2 + \sqrt{\frac{1.36S}{a}} \right]}$

S = DISTANCE TRAVELED FROM STOPPED POSITION - FEET

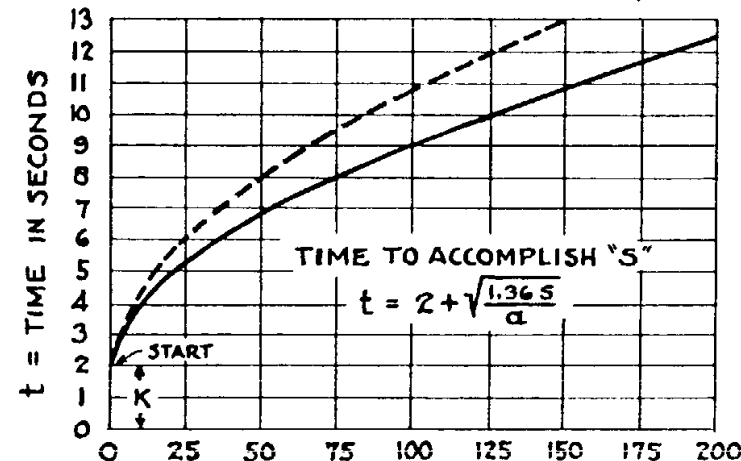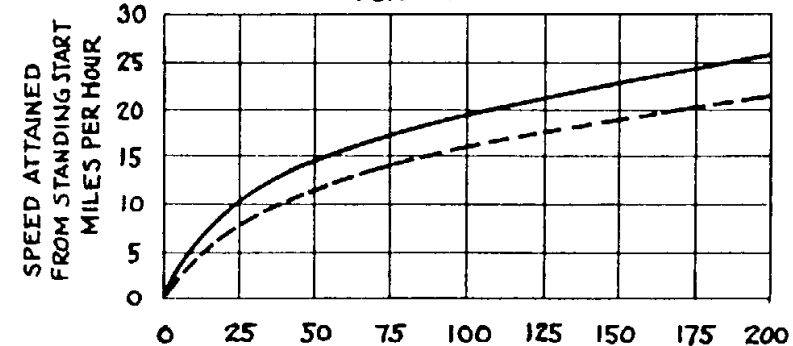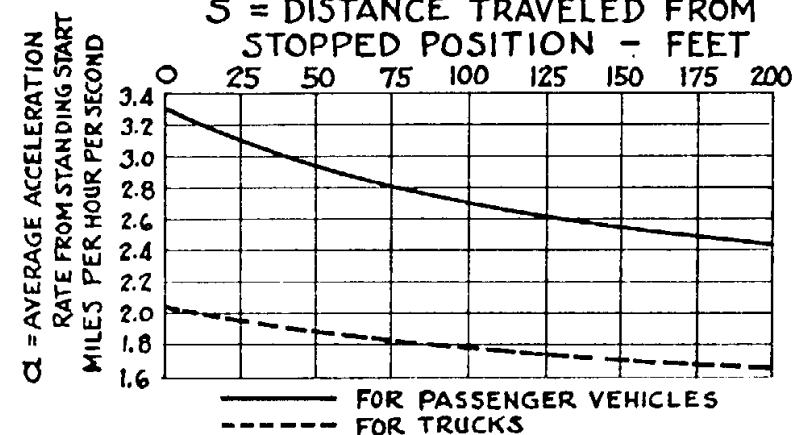

INTER-RELATION OF "d" AND DESIGN SPEEDS ON PREFERENCE ROAD TO DISTANCE "S" AT TIME "t" FOR PASSENGER VEHICLES AND FOR TRUCKS & BUSES

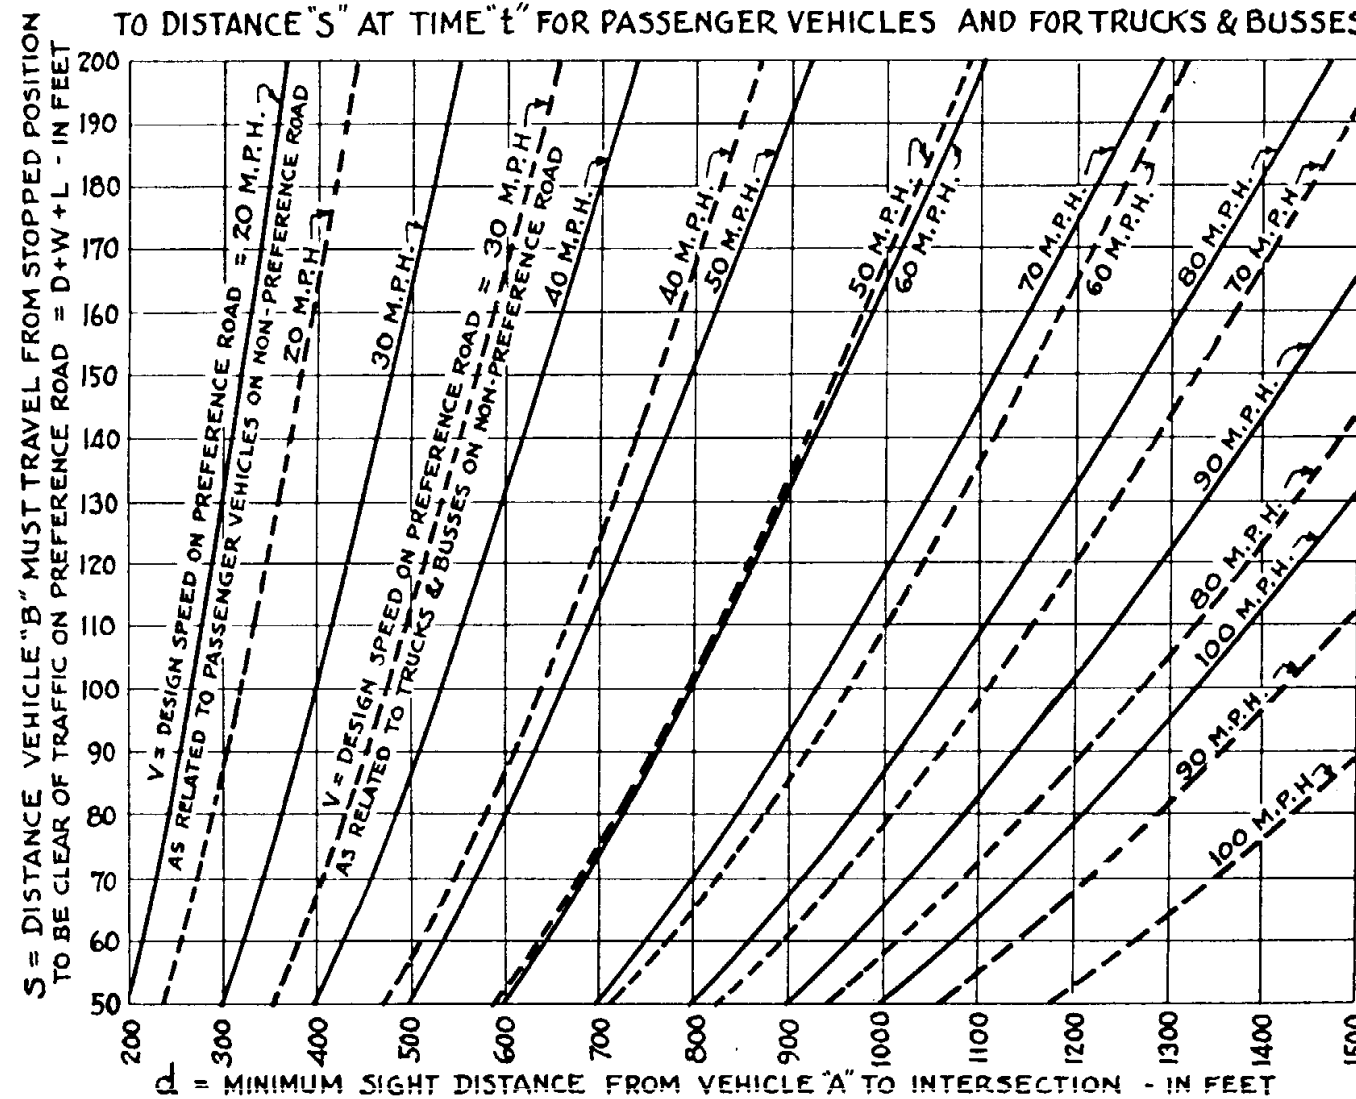

OVER-ALL LENGTHS FOR VARIOUS VEHICLES

TYPE OF VEHICLE	SIGNIFICANT LENGTH GROUPS	OCCASIONAL LENGTHS	DESIGN LENGTH
PASSENGER VEHICLE	A.A.S.H.O. DATA UNDER 17'	A.A.S.H.O. 17+	20'
SINGLE-UNIT TRUCK OR BUS	H.P.S. DATA UNDER 30'	H.P.S. DATA 35+	30'
TRACTOR TRUCK - SEMITRAILER	UNDER 40'	60+	45'
TRUCK & TRAILER COMBINATION	UNDER 60'	70+	65'

NOTE: Over-all lengths are limited by law in Arizona as follows:
Single unit vehicles -- 33 Feet
Combination vehicles -- 85 Feet

NOTES:

THE VALUES SHOWN FOR "a" & "K" ARE ASSUMED VALUES USED BY A.A.S.H.O. AND BASED ON RESEARCH. VALUES FOR "L" ARE BASED ON ANALYSIS OF HIGHWAY PLANNING SURVEY DATA FOR TRUCKS & BUSES, AND ON A.A.S.H.O. DATA FOR PASSENGER VEHICLES.

IN THE CALCULATIONS PRESENTED HERE IT IS ASSUMED THAT "V" THE SPEED OF VEHICLE ON THE PREFERENCE ROAD IS CONSTANT. SHOULD VEHICLE "A" REDUCE SPEED BELOW DESIGN SPEED OF PREFERENCE ROAD UPON SIGHTING VEHICLE "B" ADDITIONAL SAFETY IS INTRODUCED. (COMPARE VALUES FOR "d" WITH SAFE STOPPING DISTANCE FOR "V".)

ARIZONA STATE HIGHWAY DEPARTMENT PLANS DIVISION

MINIMUM SAFE SIGHT RESTRICTIONS AT INTERSECTIONS WHERE TRAFFIC ON PREFERENCE ROAD PROCEEDS AT DESIGN SPEED, AND TRAFFIC ON NON-PREFERENCE ROAD STOPS BEFORE CROSSING PREFERENCE ROAD

CALCULATED AND DRAWN APRIL 1941
BY LESLIE McDUGALL - HIGHWAY DESIGNER

TRACED BY L.M.D.

CHECKED BY

APPROVED BY
ENGINEER OF PLANS

STANDARD DRWG. NO.

D 1-4

STOP
INTERSECTION

REV.

FORMULA (A.A.S.H.O.-Policy 1940)

For Vertical Non-Passing Sight Distance.

When $S_{NP} > L$, $S_{NP} = \frac{728}{A} + \frac{L}{2}$.

When $S_{NP} < L$, $S_{NP} = 38.2 \sqrt{\frac{L}{A}}$.

Where, S_{NP} = Non Passing Sight Distance in feet.





L = Length of Vertical Curve in feet.

A = Algebraic difference in grades expressed in percent.

Height of eye = 4.5 Feet.

Height of object = 4 inches.

Note: The term "Non-Passing Sight Distance" applies to TWO-LANE and THREE LANE highways where opposing traffic may be encountered. In the case of FOUR-LANE or DIVIDED highways the figures shown here for Non-Passing become Minimum PASSING Sight distance.

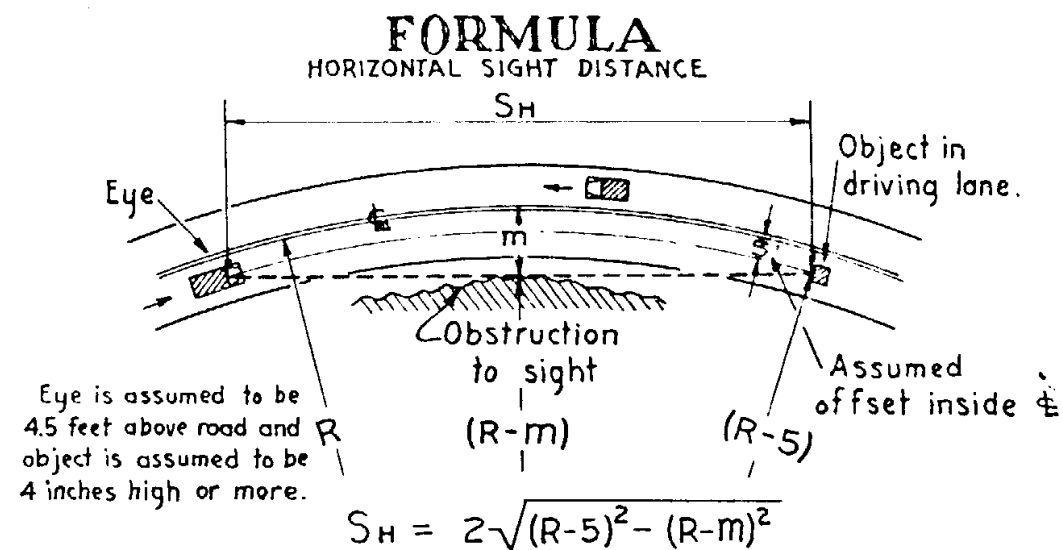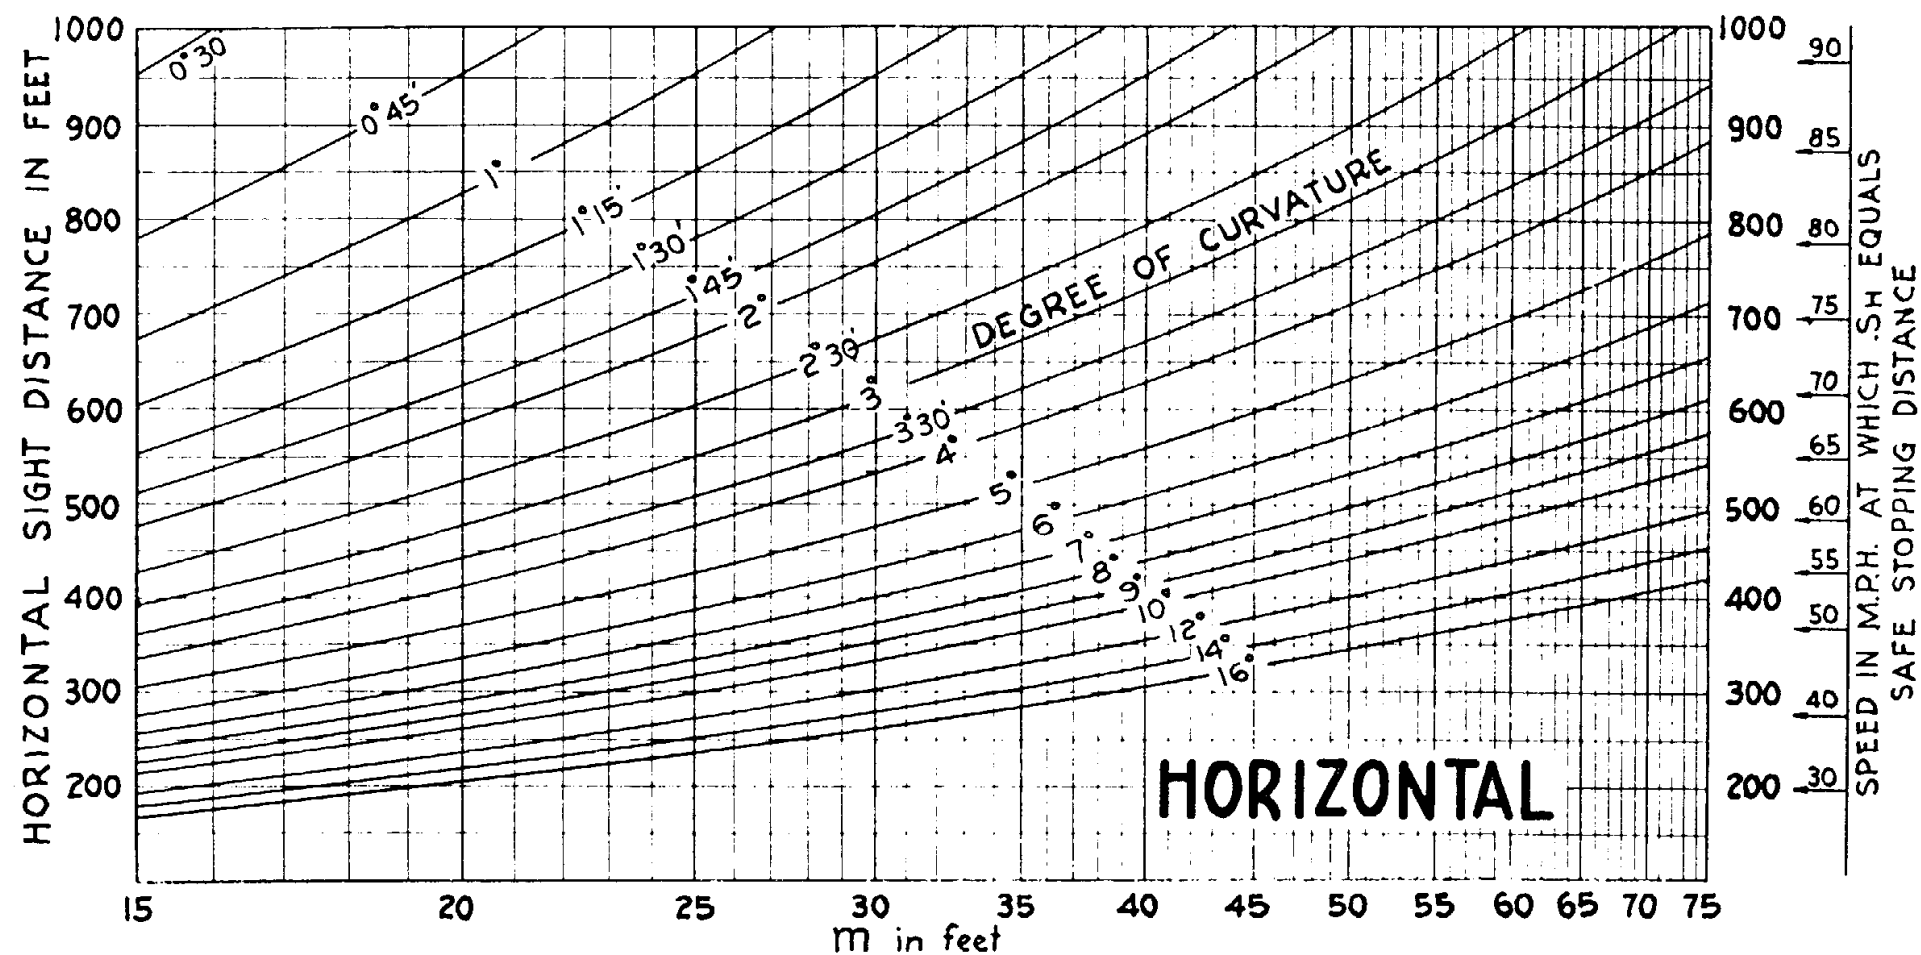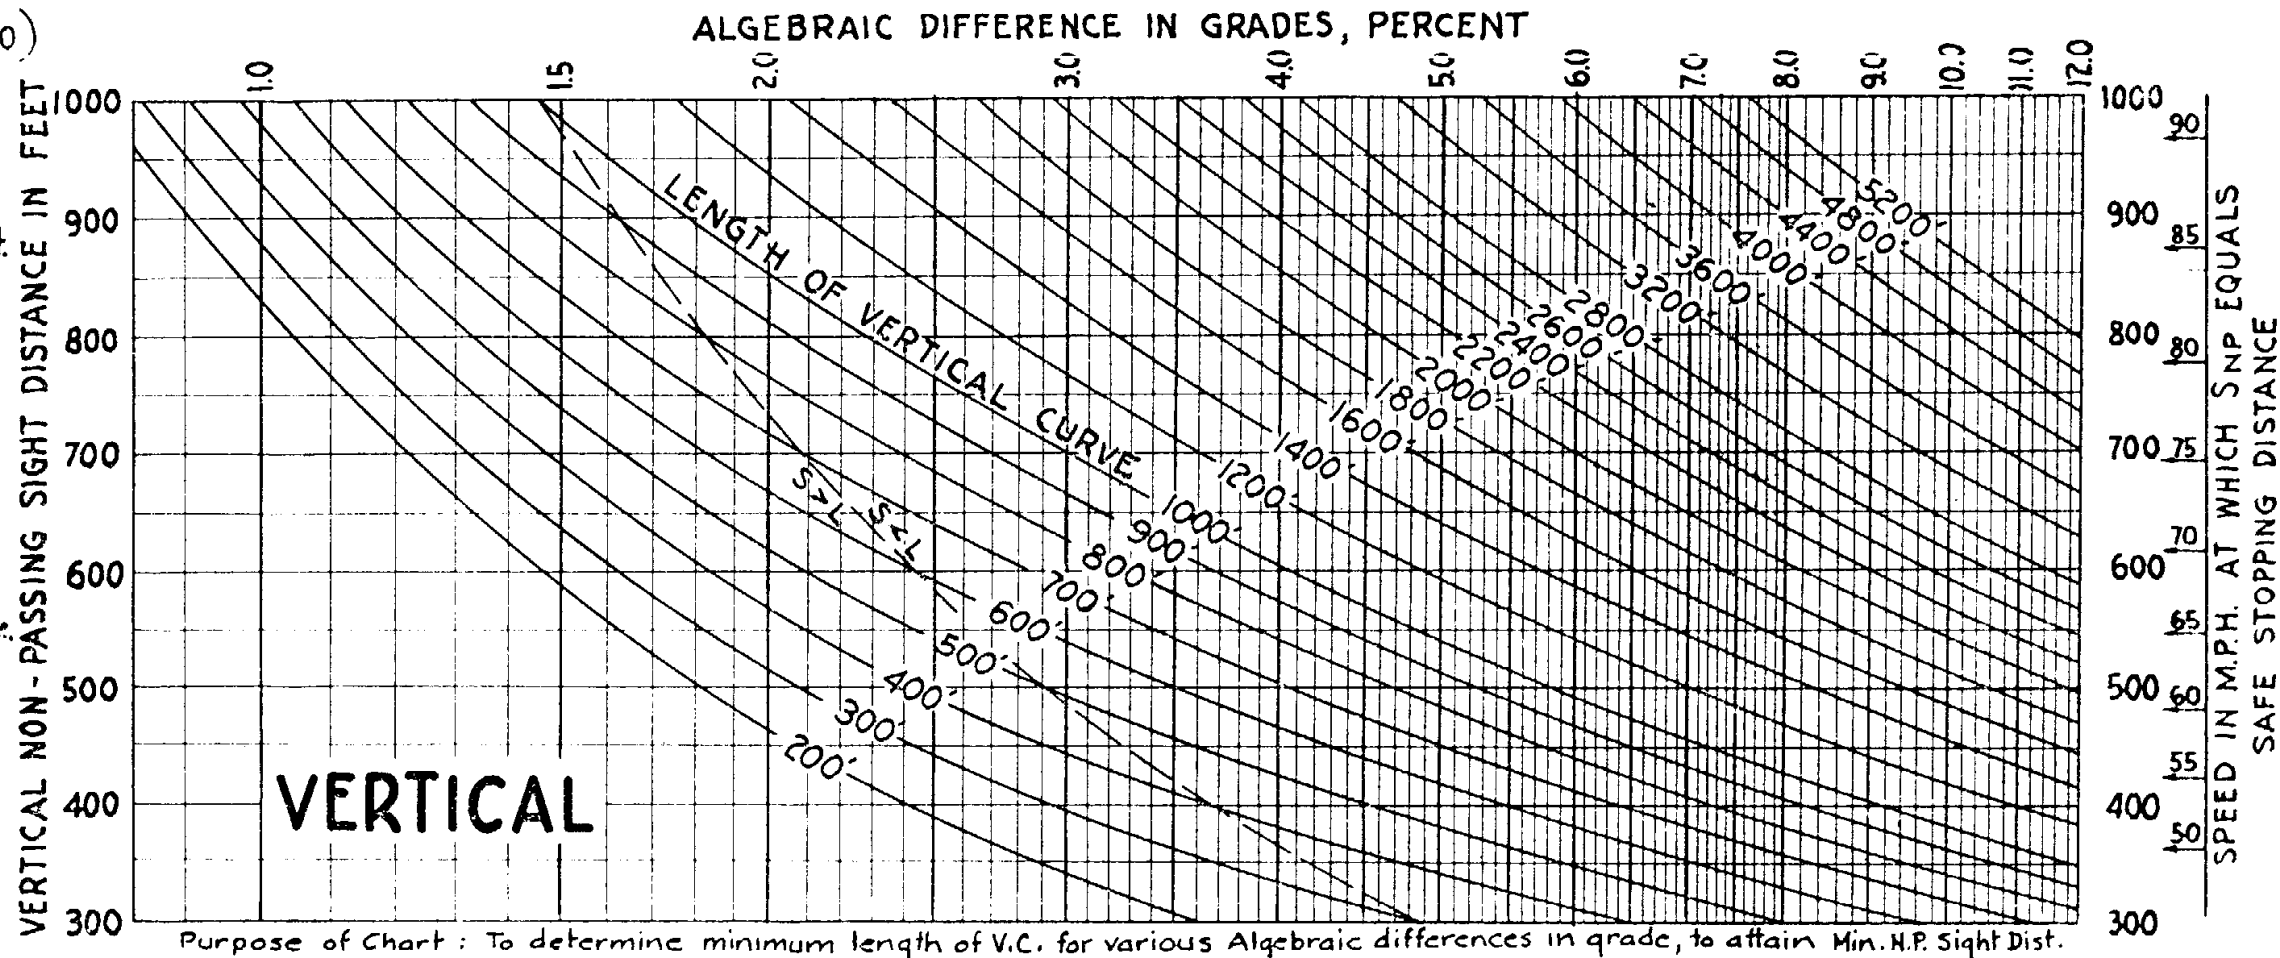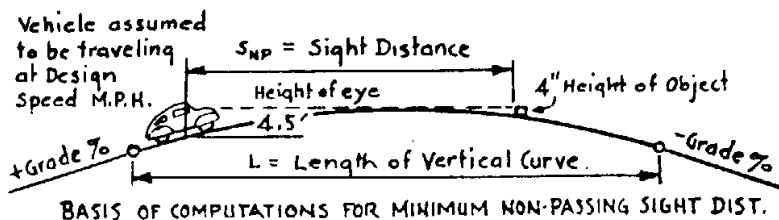


ARIZONA STATE HIGHWAY DEPARTMENT
PLANS DIVISION

NON-PASSING SIGHT DISTANCE
VERTICAL & HORIZONTAL

DRAWN GH & LM'D JUNE '35
TRACED GH JUNE '45
CHECKED
APPR. BY
ENGR. OF PLANS


D1-5

REV.

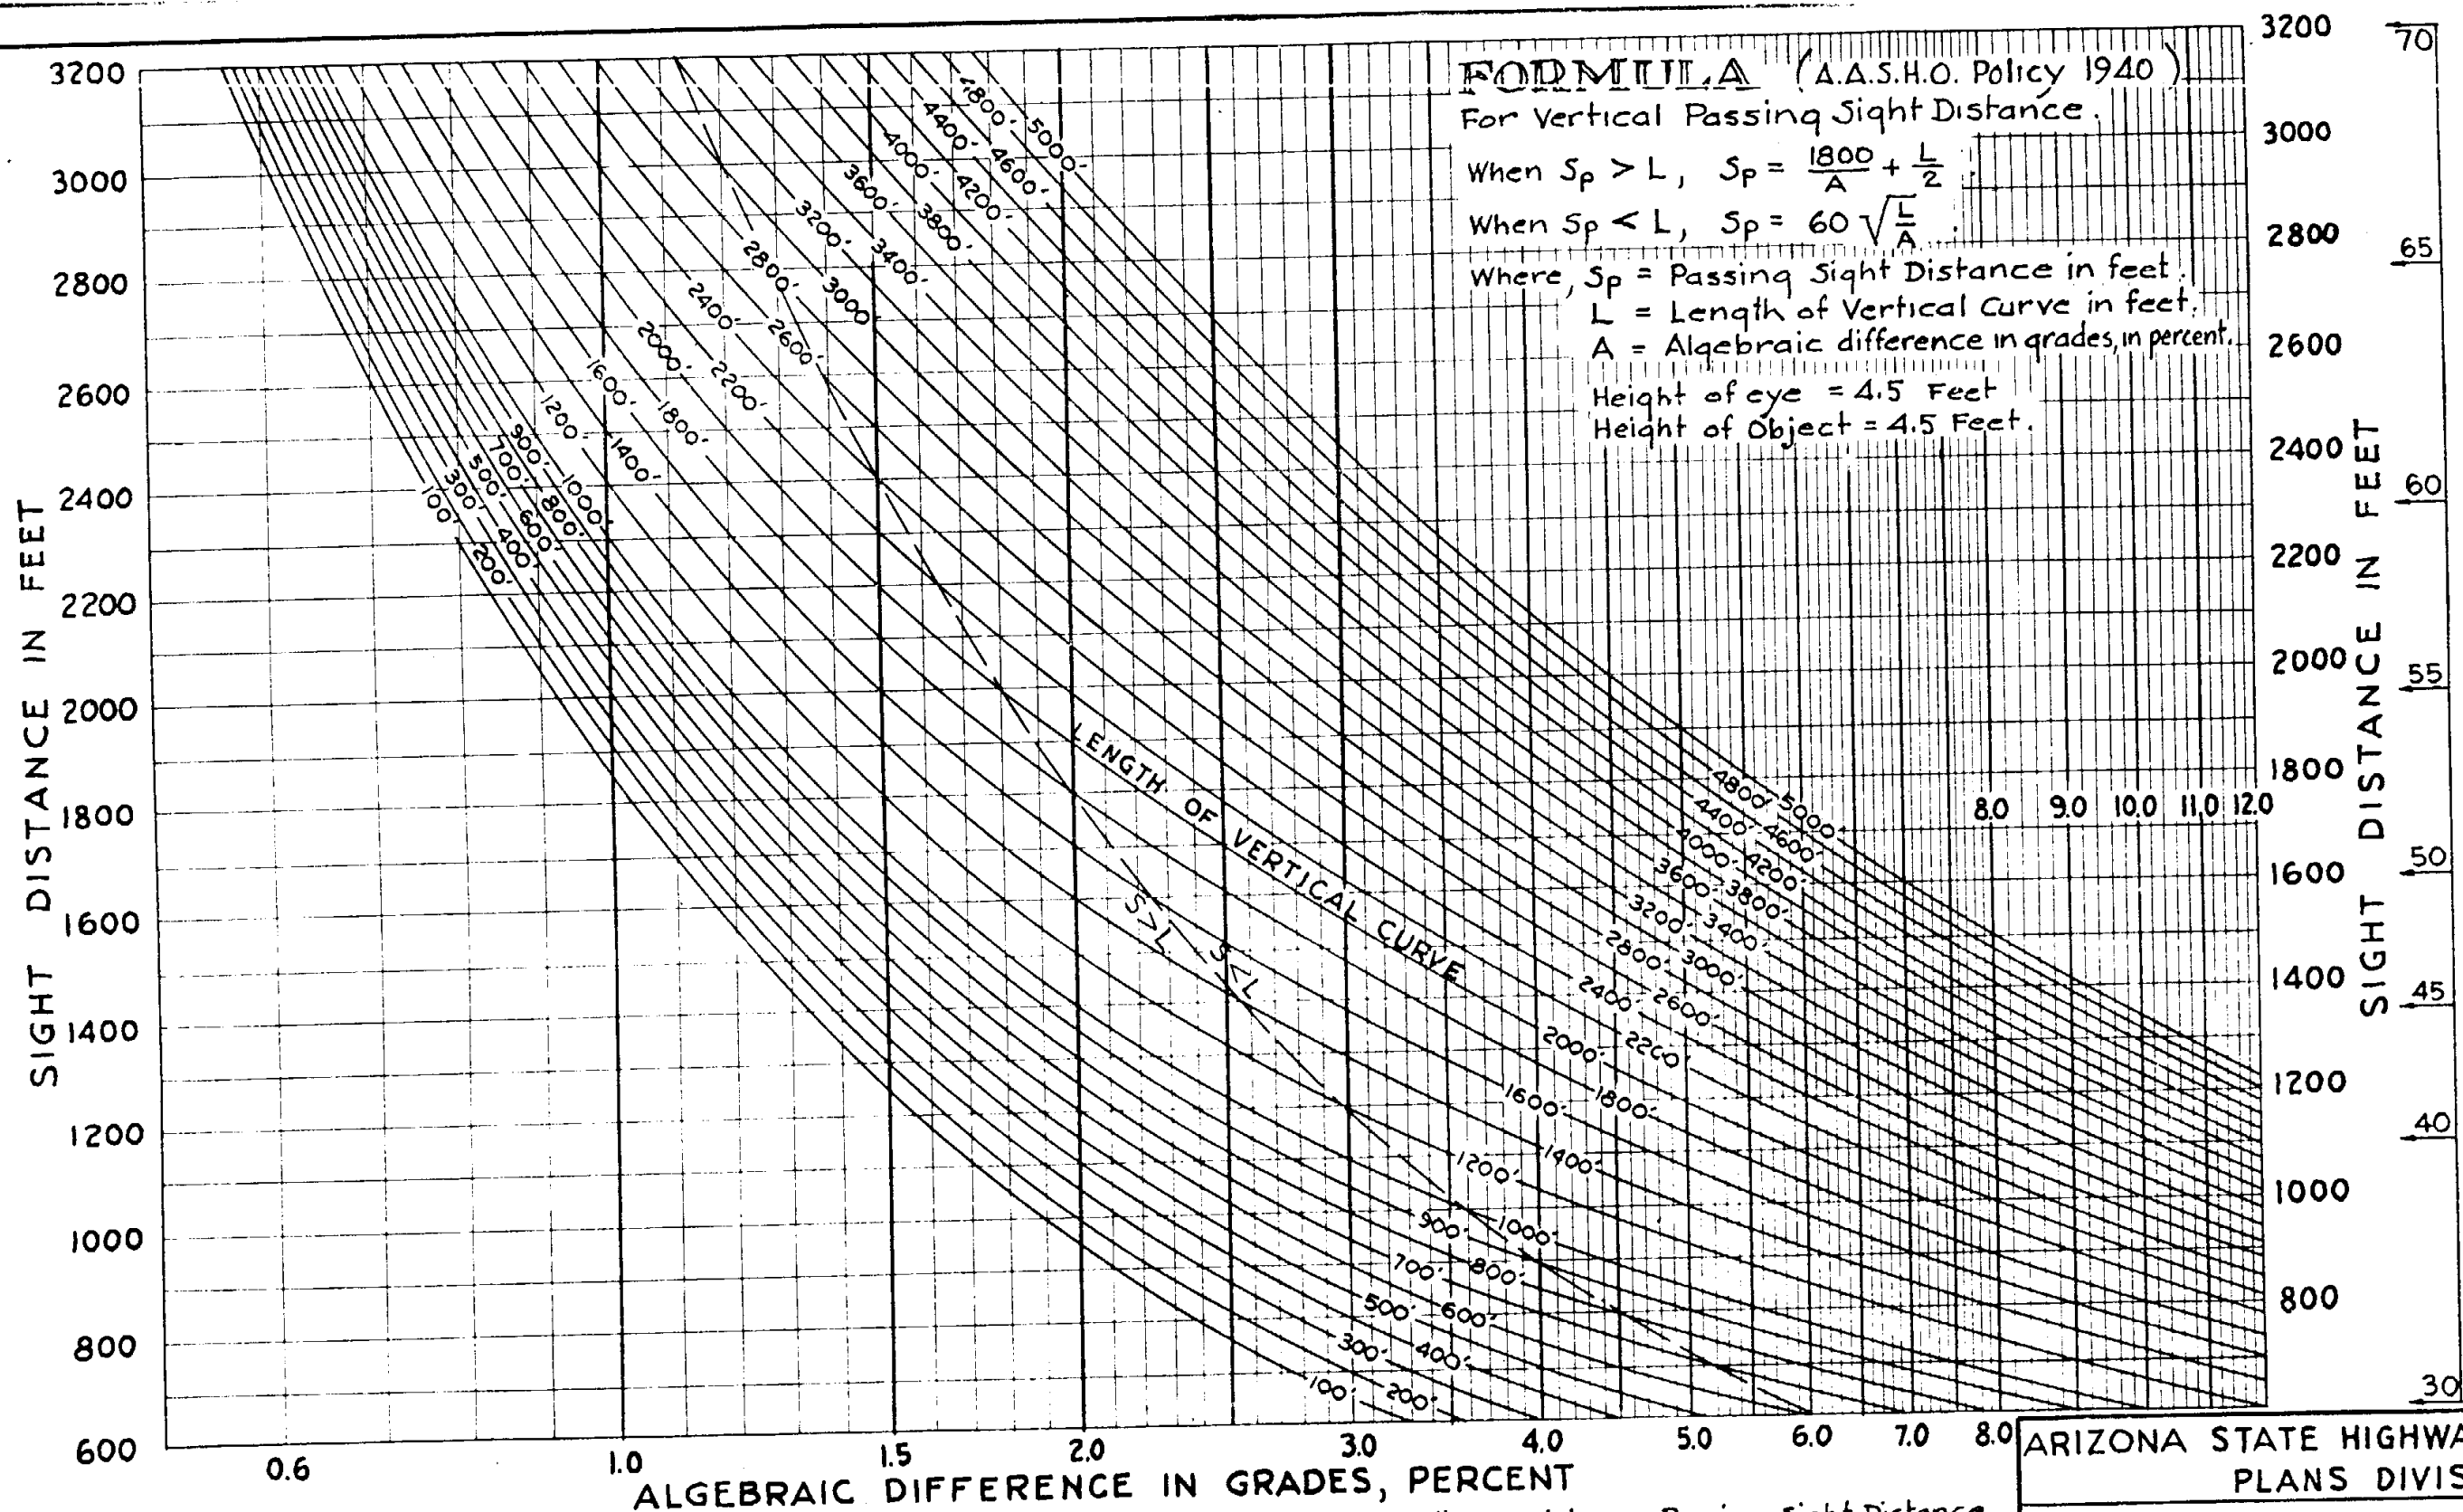

Purpose of Chart: To determine minimum length of Vert. curve for various Alg. diff. in grades to attain minimum Passing Sight Distance.

Condition:
 I must not pass II
 When III is within Min.
 "Sp" Visibility of I.

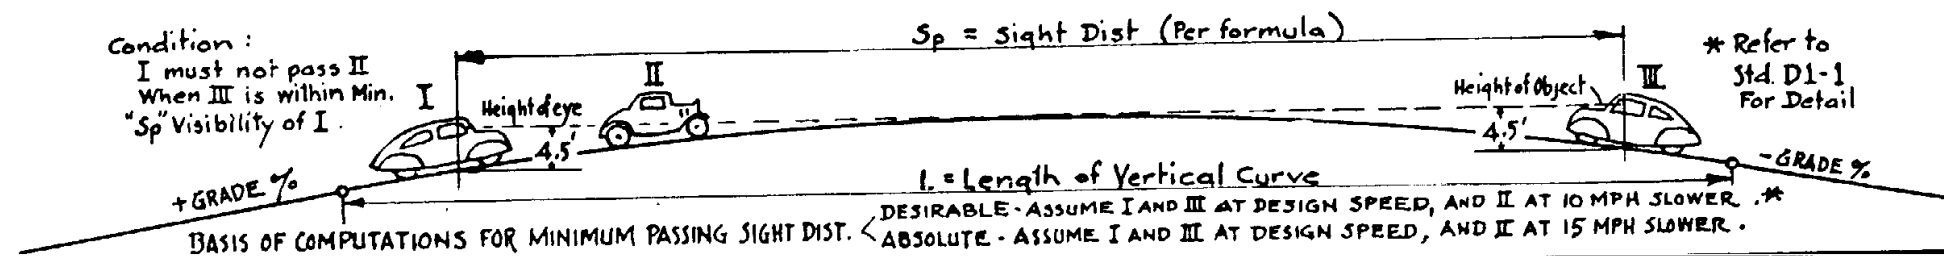

ARIZONA STATE HIGHWAY DEPARTMENT
 PLANS DIVISION


PASSING SIGHT DISTANCE ON VERTICAL CURVES

DRAWN G.H. & L.M.D. JUNE '45
 TRACED G.H. JUNE '45
 CHECKED
 APPR. BY
 ENGR. OF PLANS H.H. Wessell

D1-6

REV.

* SAFE PASSING SPEED IN MILES PER HOUR FOR 2 LANE HIGHWAY
 * Based on 10 M.P.H. speed difference of passed vehicle.

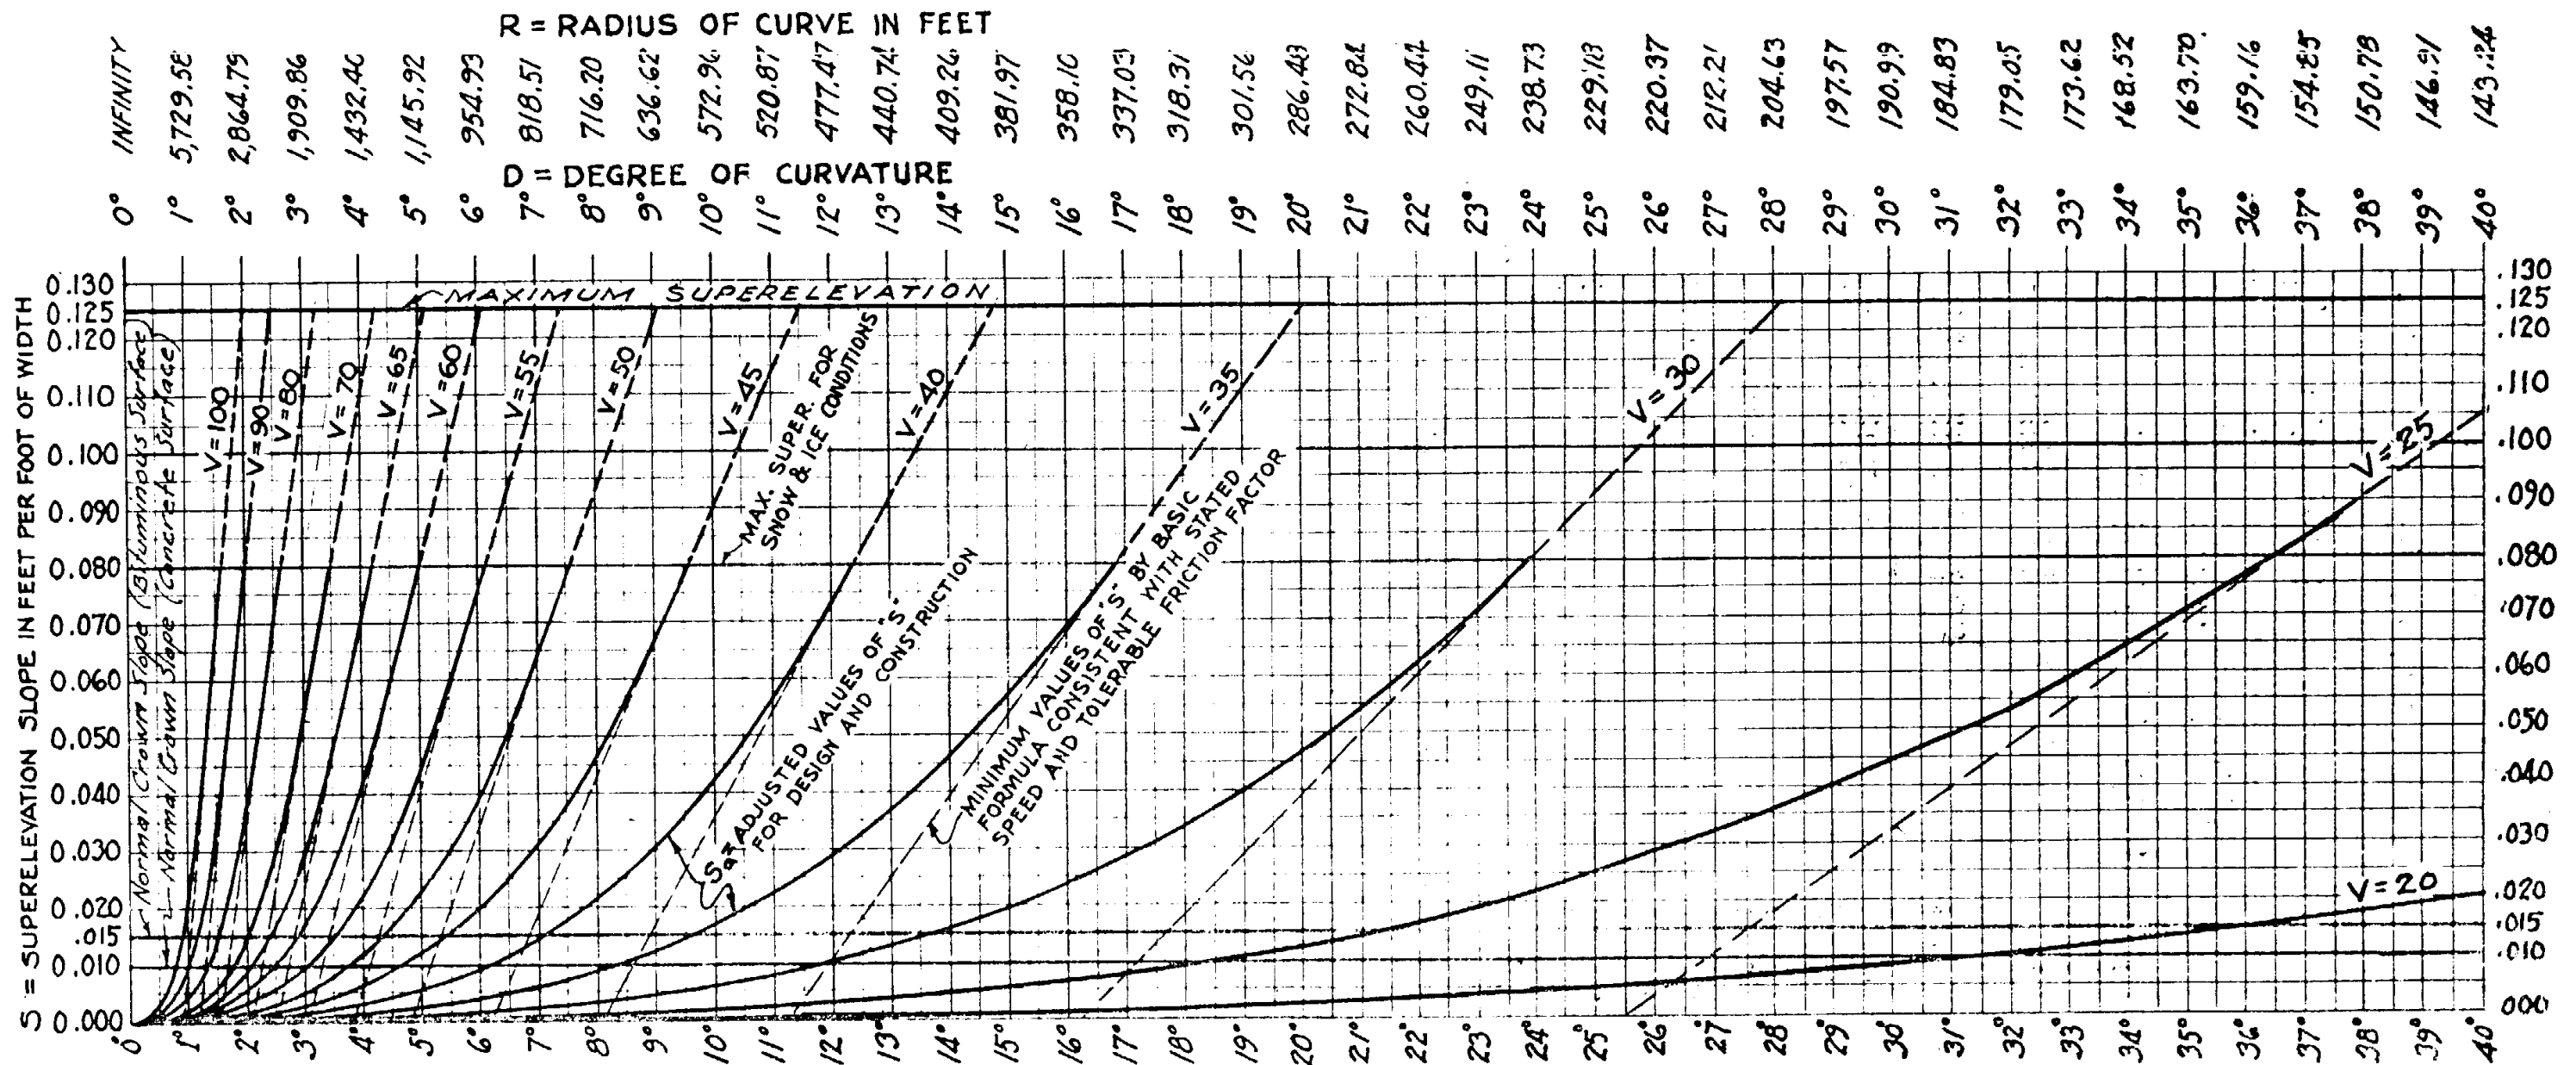

NON-COMPENSATED CENTRIFUGAL FORCE TOLERATION ENDING OF COMFORT - BEGINNING DISCOMFORT				
DESIGN SPEED V	BALL BANK EMANATION ANGLE, B _B	INCLUDED BODY ROLL ANGLE B _R	NON-COMPENSATED FRICTION ANGLE B _F = B _B - B _R	FRICTION FACTOR F = Tan. B _F
20	14.5	2.5	12.0	.210
25	12.5	2.0	10.5	.185
30	11.5	1.75	9.75	.170
35	10.5	1.5	9.0	.160
40	10.0	1.5	8.5	.150
45	9.5	1.25	8.25	.145
50	9.0	1.0	8.0	.140
55	8.75	1.0	7.75	.135
60	8.5	1.0	7.5	.130
65	8.25	1.0	7.25	.125
70	8.0	1.0	7.0	.120
75	7.75	1.0	6.75	.117
80	7.5	1.0	6.5	.115
85	7.4	1.0	6.4	.112
90	7.3	1.0	6.3	.110
95	7.2	0.95	6.15	.107
100	7.1	0.90	6.0	.105

MILES PER HOUR
EXPRESSED IN DEGREES
DEGREES
DEGREES
NON-COMPENSATED CENTRIFUGAL RATIO HAZARD
PROBABLE ERROR ± .001

DESIGN POLICY It is recommended that minimum superelevation used for any curve be not less than 0.015' Per Foot. In the case of simple curve with tangents, transition between normal crown and minimum superelevated section to be accomplished in a minimum of 200' on tangent. Superelevation slopes less than .015 to be used only in the case of reverse curves with spirals. In the case of spirals with tangents refer to Standard D2-2 for method of transition.

FORMULA

centrifugal ratio, or the slope at which centrifugal force is fully compensated = $\frac{.067 V^2}{R}$, or $.00001164 V^2 D$

Hence, the basic formula for superelevation is :

$$S = .00001164 V^2 D - F$$

in which {
 S = Superelevation slope in ft. per ft.
 V = Velocity in miles per hour
 D = Degree of Curvature in degrees
 F = Friction factor (as per table left)

Then

To compute the adjusted values of "S" for curvature of lesser degree than that which is indicated when S = .080, The following formula is applied:

$$S_a = .080 \frac{d^3}{D^3}$$

a cubical curve in which {
 S_a = Adjusted value of "S" at d
 D = Degree of curvature where S = .080
 d = Degree of lesser curvature than D

NOTES :

The figures for "Non-compensated centrifugal force toleration" as shown on table (lower left), are products of analysis and extension of Highway research data endorsed by A. A. S. H. O. and National Safety Council. These figures are based on normal road surface conditions free of mud, snow or ice.

ARIZONA STATE HIGHWAY DEPARTMENT
PLANS DIVISION

SUPERELEVATION AS RELATED TO CURVATURE AT VARIOUS DESIGN SPEEDS

CALCULATED AND DRAWN APRIL 1941
BY LESLIE MCDUGALL - HIGHWAY DESIGNER


CHECKED BY

APPROVED BY
ENGINEER OF PLANS *H. Wessel*

STANDARD DRWG. NO.


D 2-1

REV.

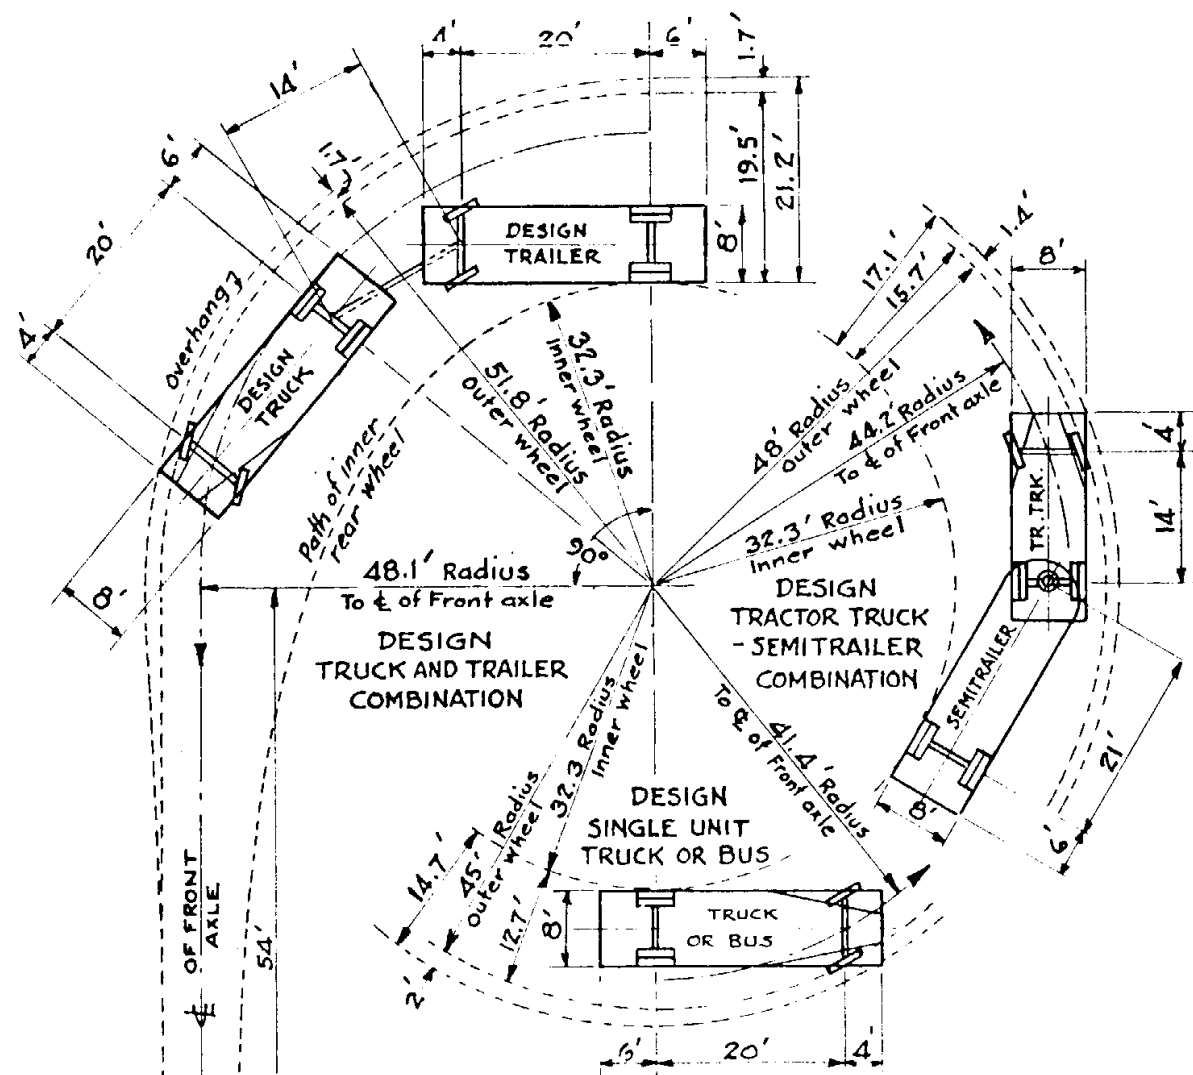

MINIMUM TURNING SPACE FOR VARIOUS DESIGN VEHICLE TYPES

NOTE: DIMENSIONS OF
DESIGN VEHICLES SHOWN HERE
CONFORM TO A.A.S.H.O.
DESIGN STANDARDS AS OF 1940

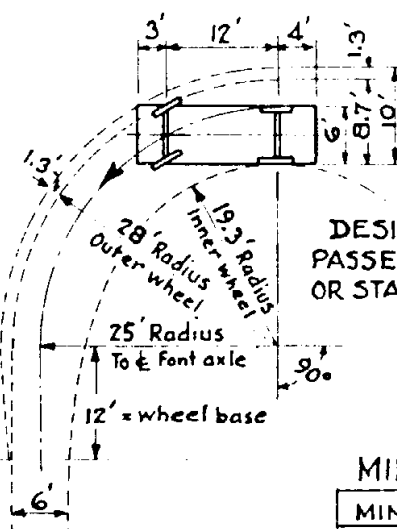

DESIGN POLICY FOR MINIMUM TURNING SPACE

	MINIMUM DESIRABLE CURB RADIUS	MINIMUM DESIRABLE TURNING LANE WIDTH
--	-------------------------------	--------------------------------------

FOR HEAVY TRUCK COMBINATIONS
FOR MEDIUM TRUCKS & BUSES
FOR PASSENGER VEHICLES

30 Feet
30 Feet
20 Feet

26 Feet
20 Feet
16 Feet



Scale 1" = 20'

DESIGN POLICY FOR HIGHWAY CURVE WIDENING

TO NORMAL TRAFFIC LANE WIDTHS ADD 0.1 FOOT PER LANE PER DEGREE OF CURVATURE
(NO PAVEMENT WIDENING REQUIRED FOR CURVES OF 5 DEGREES OR LESS.)

SPIRAL TRANSITION OF SUPERELEVATION AND WIDENING FROM TANGENT SECTION TO CURVE SECTION

ON OUTSIDE HALF OF ROADWAY, TAPER FROM NORMAL CROWN SLOPE (SECTION T-T)
TO A SECTION ON SPIRAL (S-S) WHERE SUPERELEVATION BEGINS TO EXCEED CROWN SLOPE
LET DISTANCE ON & FROM POINT T.S. BACK TO SECTION T-T EQUAL TO DISTANCE AHEAD
FROM POINT T.S. TO SECTION S-S

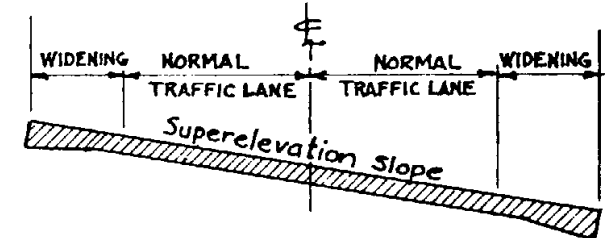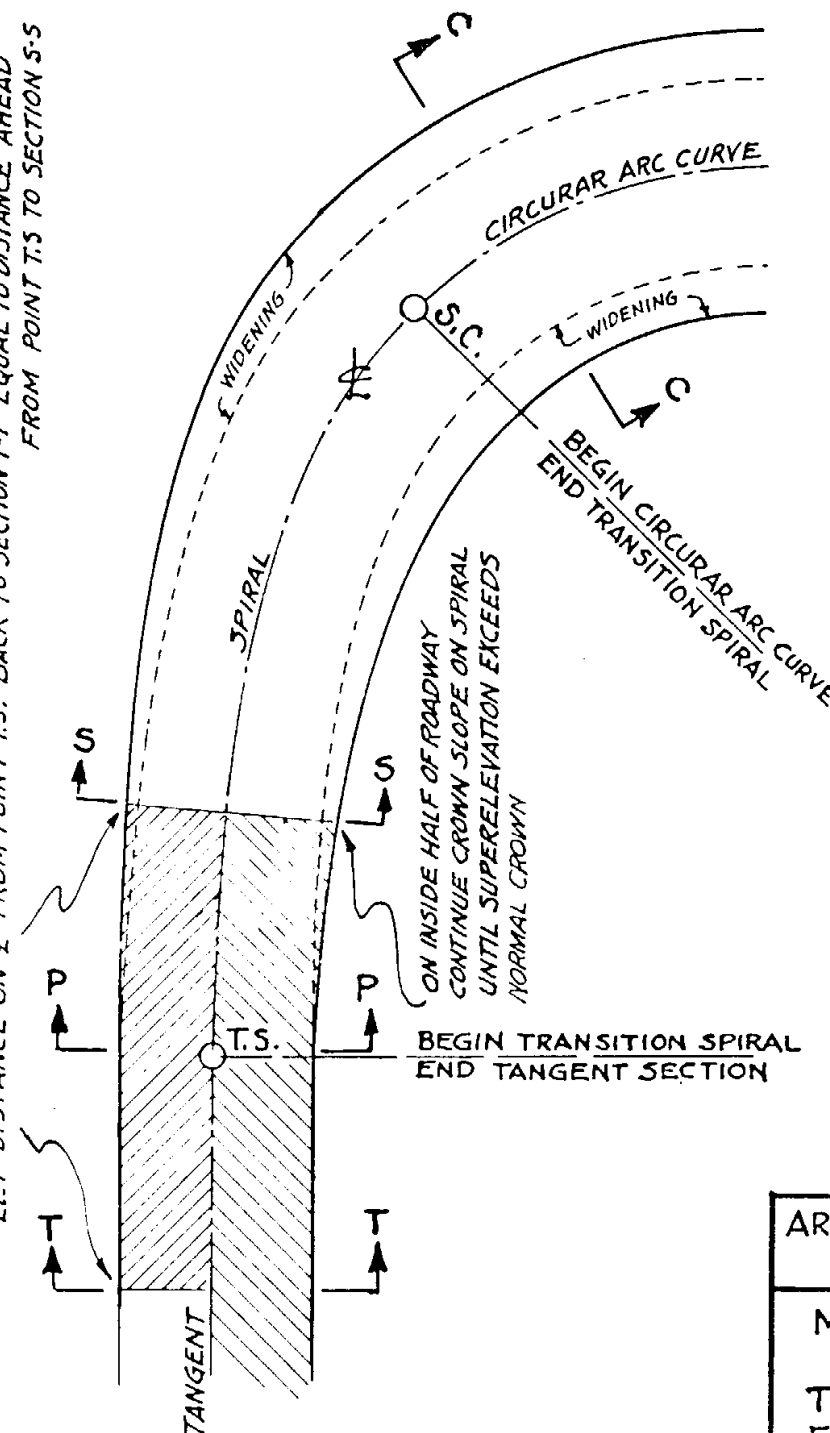

SECTION C-C


NOTE: SUPERELEVATION SLOPE AT ANY GIVEN
POINT ON SPIRAL OR CURVE IS COMPUTED
ACCORDING TO DEGREE OF CURVATURE AND
DESIGN SPEED SEE CHART AND FORMULA
STANDARD DRAWING NO. D 2-1
(Refer to adjusted values of "S")

TO COMPUTE DEGREE OF CURVATURE AT ANY
POINT ON SPIRAL &:

$$d_s = \frac{l_s D_c}{L_s}, \text{ IN WHICH}$$

d_s = DEGREE OF CURVATURE ON SPIRAL
 D_c = DEGREE OF CIRCULAR ARC CURVE
 L_s = LENGTH OF SPIRAL FROM T.S. TO S.C.
 l_s = LENGTH ON SPIRAL FROM T.S. TO POINT

WIDENING IS ALSO DETERMINED BY DEGREE OF
CURVATURE AS STATED AT THE TOP OF THIS SHEET

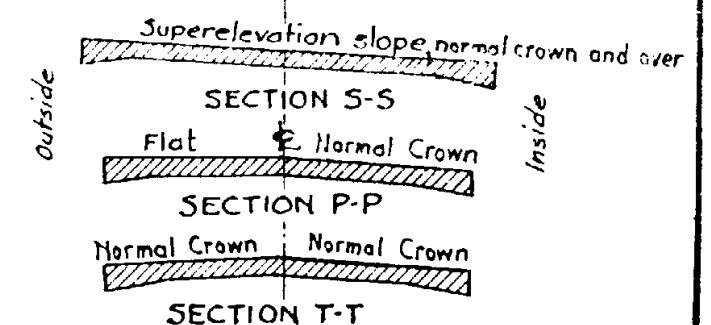

ARIZONA STATE HIGHWAY DEPARTMENT
PLANS DIVISION

MINIMUM TURNING SPACE
CURVE WIDENING AND
TRANSITION OF SUPERELEVATION
FROM TANGENT TO CURVE SECTION

CALCULATED AND DRAWN APRIL 1941
BY LESLIE M'DOUGALL - HIGHWAY DESIGNER

CHECKED BY

APPROVED BY
ENGINEER OF PLANS

STANDARD DRWG. NO.

D 2-2

NOTE: THE ABOVE INSTRUCTIONS WITH REFERENCE TO
TAPERING SLOPES FROM CROWN TO SUPERELEVATED
SECTION, APPLY ONLY TO CURVES FOLLOWING A TANGENT.
IN THE CASE OF REVERSE CURVES SUPERELEVATION
STARTS AT BEGINNING OF SPIRAL.

Superelevation slopes are expressed in decimals of a foot rise per foot, measured horizontal & transverse to &

SUPERELEVATION SLOPES FOR VARIOUS DEGREES OF CURVATURE AT VARIOUS DESIGN SPEEDS

DEGREE OF CURVE	DESIGN SPEED IN MILES PER HOUR						
	100	95	90	85	80	75	70
20'							.1270
4° 15'							.1224
10'							.1178
05'							.1127
4° 00'							.1081
55'							.1036
50'							.0984
3° 45'						.1285	.0939
40'						.1233	.0893
35'						.1174	.0842
3° 30'						.1122	.0796
25'						.1069	.0742
20'						.1010	.0685
3° 15'					.1271	.0958	.0637
10'					.1212	.0906	.0591
05'					.1144	.0847	.0542
3° 00'					.1085	.0793	.0501
55'					.1025	.0731	.0462
50'				.1260	.0958	.0666	.0421
2° 45'				.1193	.0899	.0611	.0386
40'				.1125	.0839	.0559	.0353
35'				.1050	.0766	.0504	.0319
2° 30'			.1257	.0982	.0697	.0459	.0290
25'			.1182	.0915	.0632	.0416	.0263
20'			.1097	.0840	.0564	.0372	.0235
2° 15'		.1293	.1021	.0766	.0508	.0335	.0211
10'		.1210	.0946	.0687	.0456	.0300	.0190
05'		.1115	.0861	.0605	.0401	.0244	.0167
2° 00'	.1278	.1031	.0782	.0538	.0357	.0235	.0148
55'	.1185	.0947	.0692	.0476	.0316	.0208	.0131
50'	.1080	.0853	.0599	.0412	.0273	.0180	.0114
1° 45'	.0987	.0760	.0524	.0360	.0239	.0157	.0099
40'	.0894	.0661	.0455	.0313	.0208	.0137	.0086
35'	.0785	.0560	.0386	.0265	.0176	.0116	.0073
1° 30'	.0672	.0479	.0330	.0227	.0151	.0099	.0063
25'	.0570	.0406	.0280	.0192	.0128	.0084	.0053
20'	.0468	.0334	.0230	.0158	.0105	.0069	.0044
1° 15'	.0389	.0277	.0191	.0131	.0087	.0057	.0036
10'	.0319	.0227	.0157	.0108	.0071	.0047	.0030
05'	.0251	.0179	.0123	.0084	.0056	.0037	.0023
1° 00'	.0199	.0142	.0098	.0067	.0045	.0029	.0019
55'	.0155	.0111	.0076	.0052	.0035	.0023	.0014
50'	.0114	.0081	.0056	.0038	.0026	.0017	.0011
0° 45'	.0083	.0060	.0041	.0028	.0019	.0012	.0008
40'	.0060	.0043	.0029	.0020	.0013	.0009	.0006
35'	.0039	.0028	.0019	.0013	.0009	.0006	.0004
0° 30'	.0025	.0018	.0012	.0008	.0006	.0004	.0002
25'	.0015	.0011	.0007	.0005	.0003	.0002	.0001+
20'	.0007	.0005	.0004	.0002	.0002	.0001	.0001-
0° 15'	.0003	.0002	.0002	.0001	.0001	.0000	.0000
10'	.0001	.0001	.0001	.0000	.0000	.0000	.0000
05'	.0000	.0000	.0000	.0000	.0000	.0000	.0000
0° 00'	.0000	.0000	.0000	.0000	.0000	.0000	.0000

Minimum Superelevation for any curve .0150' Per Ft. ; Maximum for snow conditions .0800 Per Ft. Values shown less than .0150' (Sloped figures) are for reverse spiral transitions only .

DEGREE OF CURVE	DESIGN SPEED IN MILES PER HOUR					
	65	60	55	50	45	40
15° 00'						.1294
14° 30'						.1200
14° 00'						.1107
13° 30'						.1014
13° 00'						.0921
12° 30'						.0828
12° 00'						.0732
45'						.0689
30'					.1261	.0645
15'					.1202	.0605
11° 00'					.1143	.0564
45'					.1084	.0527
30'					.1025	.0491
15'					.0965	.0458
10° 00'					.0907	.0425
45'					.0848	.0393
30'					.0788	.0363
15'					.0728	.0335
9° 00'				.1219	.0670	.0309
45'				.1146	.0616	.0284
30'				.1074	.0565	.0260
15'				.1001	.0517	.0238
8° 00'				.0928	.0471	.0217
45'				.0855	.0428	.0197
30'			.1291	.0783	.0388	.0179
15'			.1203	.0704	.0351	.0162
7° 00'			.1115	.0634	.0316	.0145
45'			.1027	.0568	.0283	.0131
30'			.0939	.0507	.0253	.0116
15'			.0851	.0452	.0224	.0103
6° 00'		.1214	.0758	.0699	.0199	.0092
45'		.1109	.0667	.0632	.0175	.0081
30'		.1005	.0584	.0508	.0153	.0071
15'		.0900	.0509	.0267	.0133	.0061
5° 00'	.1209	.0794	.0439	.0231	.0115	.0053
45'	.1086	.0681	.0376	.0198	.0098	.0045
30'	.0963	.0579	.0320	.0168	.0073	.0039
15'	.0840	.0487	.0269	.0142	.0060	.0033
4° 00'	.0710	.0406	.0225	.0118	.0055	.0027
45'	.0585	.0335	.0185	.0097	.0049	.0022
30'	.0476	.0272	.0150	.0079	.0039	.0018
15'	.0381	.0218	.0120	.0063	.0032	.0014
3° 00'	.0300	.0171	.0095	.0049	.0025	.0011
45'	.0231	.0132	.0073	.0038	.0019	.0009
30'	.0173	.0099	.0055	.0029	.0014	.0007
15'	.0126	.0072	.0040	.0021	.0010	.0005
2° 00'	.0089	.0051	.0028	.0015	.0007	.0003
45'	.0059	.0034	.0019	.0010	.0005	.0002
30'	.0037	.0021	.0012	.0006	.0003	.0001
15'	.0022	.0012	.0007	.0004	.0002	.0000
1° 00'	.0011	.0006	.0004	.0002	.0001	.0000
45'	.0005	.0003	.0001	.0001	.0000	.0000
30'	.0001	.0001	.0000	.0000	.0000	.0000
15'	.0000	.0000	.0000	.0000	.0000	.0000
0° 00'	.0000	.0000	.0000	.0000	.0000	.0000

Desirable Maximum Superelevation Slope .1000' Per Ft.

Absolute Maximum Superelevation Slope .1250' Per Ft.

DEGREE OF CURVE	DESIGN SPEED MPH		
	35	30	25
43°			.1278
42°			.1205
41°			.1133
40°			.1060
39°			.0987
38°			.0915
37°			.0842
36°			.0773
35°			.0710
34°			.0651
33°			.0595
32°			.0543
31°			.0493
30°			.0447
29°			.0404
28°		.1233	.0364
27°		.1129	.0326
26°		.1024	.0291
25°		.0919	.0259
24°		.0814	.0229
23°		.0715	.0201
22°		.0626	.0176
21°		.0545	.0153
20°	.1251	.0470	.0132
19°	.1109	.0403	.0114
18°	.0967	.0343	.0097
17°	.0824	.0289	.0081
16°	.0688	.0241	.0068
15°	.0567	.0198	.0056
14°	.0461	.0161	.0045
13°	.0369	.0129	.0036
12°	.0290	.0102	.0029
11°	.0224	.0078	.0022
10°	.0168	.0059	.0017
9°	.0122	.0043	.0012
8°	.0086	.0030	.0008
7°	.0058	.0020	.0006
6°	.0036	.0013	.0004
5°	.0021	.0007	.0002
4°	.0011	.0004	.0001
3°	.0005	.0002	.0000
2°	.0001	.0000	.0000
1°	.0000	.0000	.0000
0°	.0000	.0000	.0000


Note : All Superelevation Figures shown in these tables conform to D2-1 Formula

DEGREE OF CURVE	MPH
	20
72°	.1252
70°	.1159
68°	.1066
66°	.0973
64°	.0880
62°	.0789
60°	.0715
58°	.0646
56°	.0581
54°	.0521
52°	.0466
50°	.0414
48°	.0366
46°	.0322
44°	.0282
42°	.0245
40°	.0212
38°	.0182
36°	.0154
34°	.0130
32°	.0108
30°	.0089
28°	.0073
26°	.0058
24°	.0046
22°	.0035
20°	.0026
18°	.0019
16°	.0014
14°	.0009
12°	.0006
10°	.0003
8°	.0002
6°	.0001
4°	.0000
2°	.0000
0°	.0000

For Superelevation Formula, and also Design Policy, and method of Transition from Superelevated simple curve to Crown Section on Tangent, See Standard Drawing No D2-1 ; Where spirals are used Refer to D2-2

ARIZONA STATE HIGHWAY DEPARTMENT PLANS DIVISION		REV.
SUPERELEVATION TABLES		
SUPPLEMENT OF STANDARD D2-1		
CALCULATED AND DRAWN JUNE 1947 BY LESLIE MCDUGALL - HWY DESIGNER		STANDARD DWG. NO.
CHECKED BY		D2-3
APPROVED BY <i>H.H. Wesel</i> HWY PLANNING ENGR		

CIRCULAR CURVE WITH TRANSITION SPIRALS

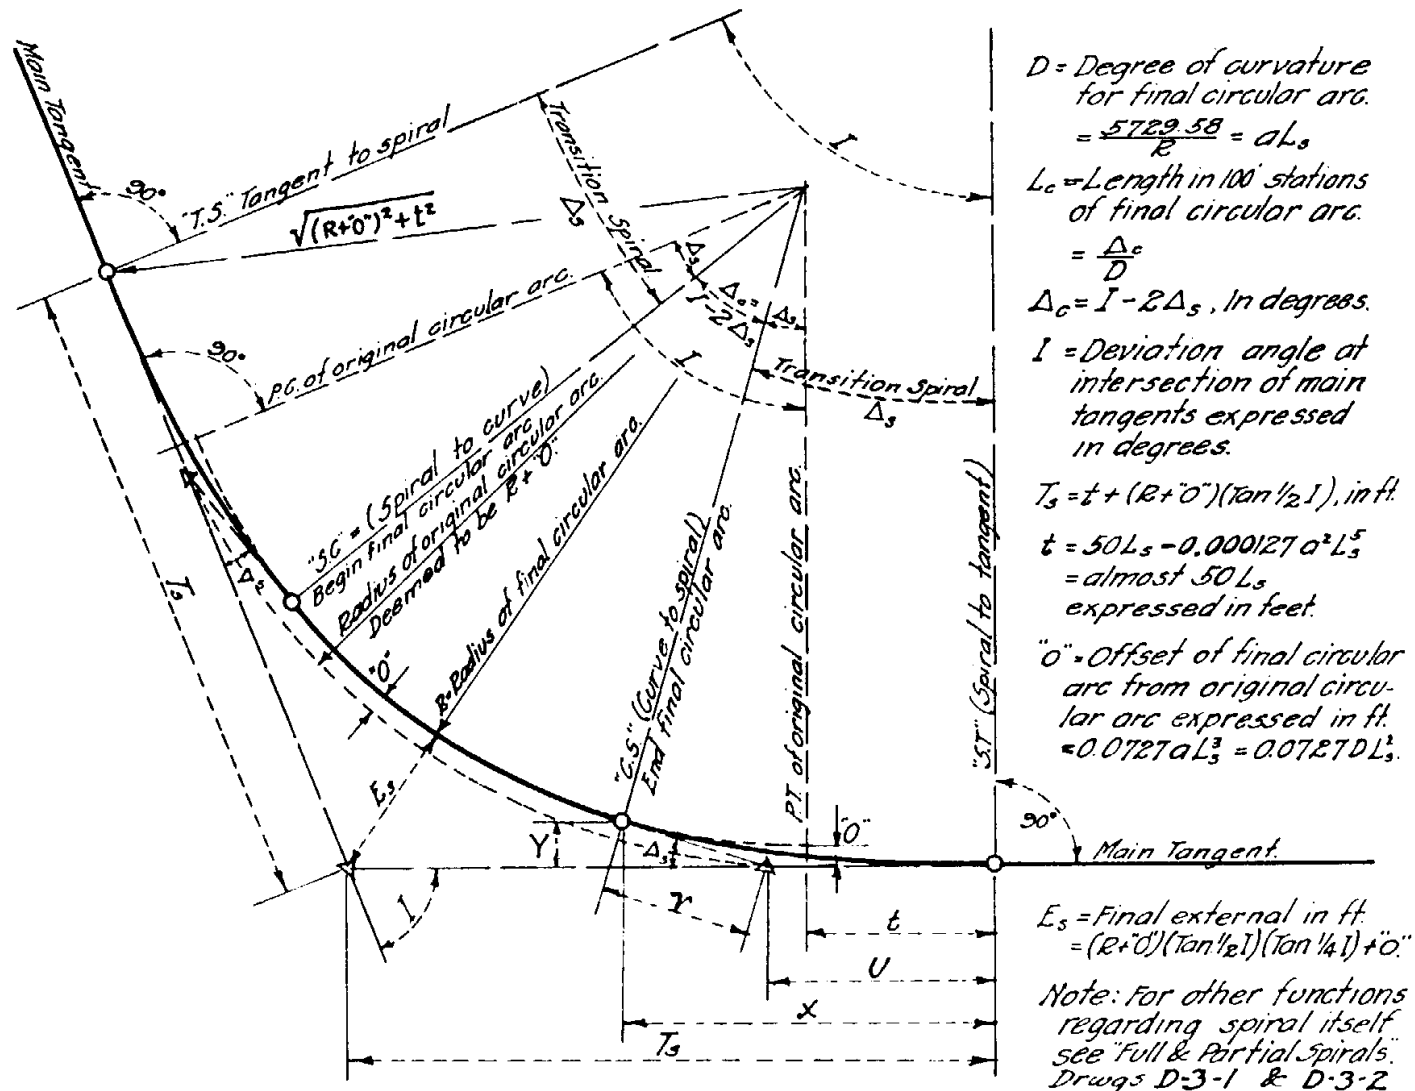

TO DETERMINE THE PROPER LENGTH FOR TRANSITION SPIRAL WHEN a IS UNKNOWN.

L_s = Length of spiral expressed in 100' stations.

V = Velocity in miles per hr. ~ Design Speed of road

$$R = \text{Radius in feet of final circular arc} = 5729.58 \div D$$
$$L_s = \frac{0.0158 \text{ V}^3}{f} = \frac{D}{a}, \text{ Then } a = \frac{D}{L_s} = \frac{5729.58}{0.0158 \text{ V}^3} \text{ When based on design speed}$$


The solution of L_s as given in above equation will give a length of spiral which will compensate centrifugal acceleration for the design speed with a safe skid resistance coefficient accounted for.

The value of L_s may be increased slightly to provide a more desirable value for "a" for the sake of simplicity in computations.

$$a = \text{Rate of change in degree of curvature per } 100' \text{ along spiral} = \frac{D}{L}$$

Note: Regardless of above formula for finding L_s it is recommended that L_s be no less than 1.5, or 150 feet minimum transition spiral length.

PARTIAL TRANSITION SPIRAL

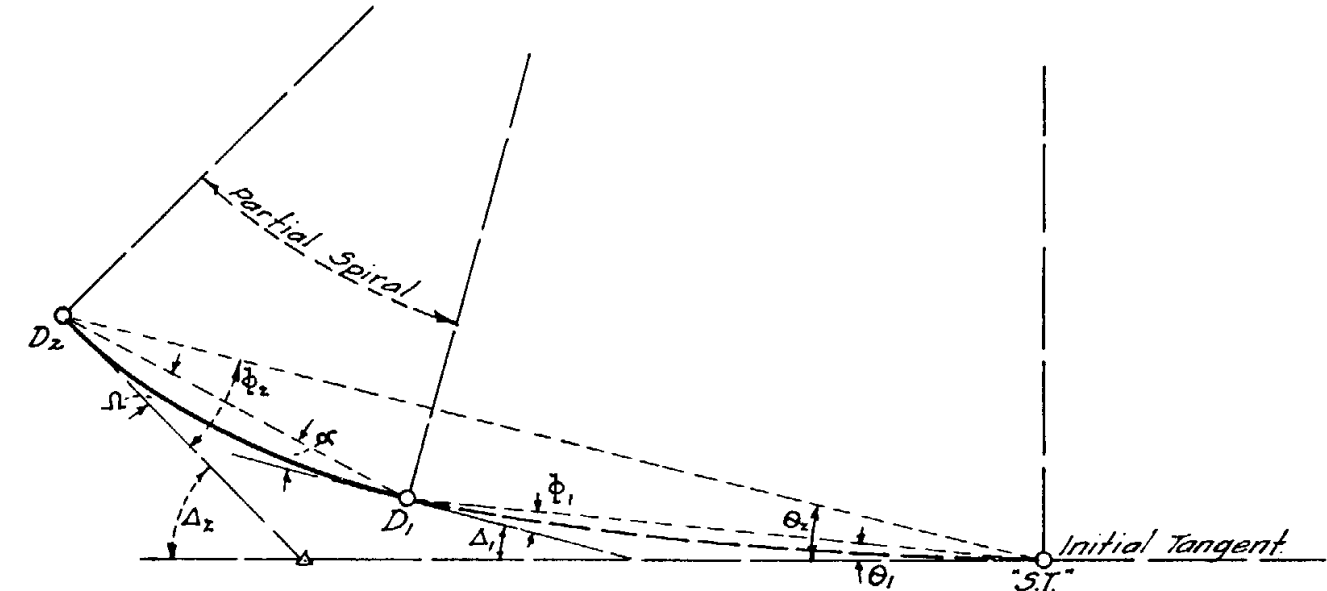
$$a = \text{Rate of change in degree of curvature along spiral per } 100' = \frac{D_1}{L_1} = \frac{D_2}{L_2}.$$

L_1 : Length of full spiral expressed in 100' stations from D_1 to "S.T." $= \frac{D_1}{\Delta}$.

$$L_2 = \text{ " " " " " " " " } D_2 \text{ to "S.T."} = \frac{D_2^2}{\sigma}.$$
$$L_2 - L_1 = \text{Length of partial spiral expressed in 100' stations from } D_2 \text{ to } D_1 = \frac{D_2 - D_1}{g}$$
$$D_1 = \text{Culminating degree of curvature at point } D_1 = aL_1 = D_2 - a(L_2 - L_1).$$
$$D_x = \quad " \quad " \quad " \quad " \quad " \quad " \quad D_x = aL_2 = D_1 + a(L_2 - L_1).$$
$$\alpha = \frac{1}{2} a L_1 (L_2 - L_1) + \frac{1}{6} a (L_2 - L_1)^2 = \frac{1}{2} D_1 \left(\frac{D_2 - D_1}{a} \right) + \frac{1}{6} a \left(\frac{D_2 - D_1}{a} \right)^2, \text{ expressed in degrees}$$
$$\Omega = \frac{1}{2} a L_2 (L_2 - L_1) - \frac{1}{6} a (L_2 - L_1)^2 = \frac{1}{2} D_2 \left(\frac{D_2 - D_1}{a} \right) - \frac{1}{6} a \left(\frac{D_2 - D_1}{a} \right)^2, \quad " \quad " \quad "$$

Note: See full transition spiral for functions ϕ , θ , and Δ Ref. to Drawg. D-3-2.

Instruction to transitman to turn partial spiral deflections α and Ω .


Example: if $a = 1/3$ and D_1 is 2'00", and D_2 is 3'00", length between is 300'.

To find α ; Normal deflection for circular curve D , for $300'$, or $\frac{1}{2} D(L_1 - L_1)$
 Plus Θ deflection for $(a = \frac{1}{3})$
 spiral for length $300'$, or $\frac{1}{6} a(L_1 - L_1)^2$
 $= 3^00 + 0^030' = 3^030'$, Answer.

To find Δ ; Normal deflection for circular curve D_2 , for 300', or $\frac{1}{2} D_2 (L_2 - L_1)$
 Minus θ deflection for $(a = \frac{1}{3})$
Spiral for length 300', or $\frac{1}{6} a (L_2 - L_1)^2$
 = $4^\circ 30' - 0^\circ 30' = 4^\circ 00'$ Answer.

ARIZONA HIGHWAY DEPARTMENT PLANS DIVISION		REV. JUNE 1941
CIRCULAR CURVE WITH TRANSITION SPIRAL AND PARTIAL TRANS. SPIRAL		
COMPILED BY	LESLIE McDUGALL '37	DRAWING NO. D 3-1
TRACED BY	K.S. 4/7/38	
CHECKED BY	H.H.W. July 1938	
APPROVED ENGR. OF PLANS	H.H. Wessel	

INTERMEDIATE SPIRAL TRANSITION FOR COMPOUND CURVES.

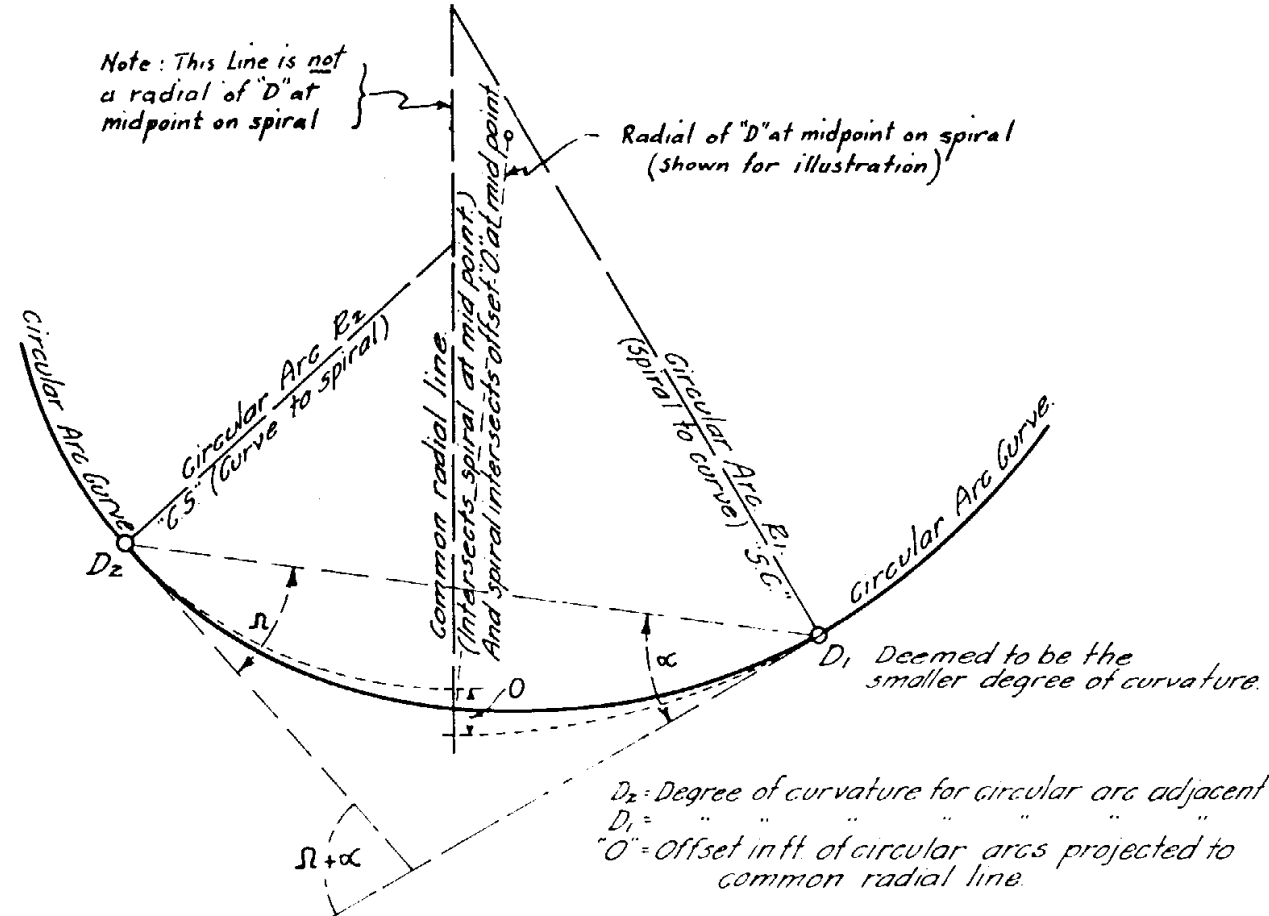

Degree of curvature at any point on spiral shown above = D_p
 $D_p = D_z - (a \text{ times length in 100' stations from } D_z \text{ to point}) =$
 $D_1 + (a \text{ times length in 100' stations from } D_1 \text{ to point})$

Note: Above spiral transition is basically the same as "Partial Transition Spiral" Drwg. D-3-1

INSTRUCTIONS FOR DETERMINING BASIC DATA.

First determine value of a , with V the design speed in M.P.H.

$$a = \frac{5729.58}{0.0158 \sqrt{3}} = \text{Max. rate of change in degree of curvature per 100' along spiral}$$

Note:- Above value for α may be decreased slightly for convenience of computations, this corrected value to be used in equations below and accepted as the value of α as a constant.

Then "O" = $0.0727 (D_z - D_1) \left(\frac{D_z - D_1}{d} \right)^2$


$$\Omega = \frac{1}{2} D_2 \left(\frac{D_2 - D_1}{a} \right) - \frac{1}{6} a \left(\frac{D_2 - D_1}{a} \right)^2 = \text{Deflection angle at } D_2 \text{ to } D_1 \text{ in degrees}$$

$$\alpha = \frac{1}{2} D_1 \left(\frac{D_2 - D_1}{a} \right) + \frac{1}{6} a \left(\frac{D_2 - D_1}{a} \right)^2 = \quad " \quad " \quad " \quad D_1 \text{ to } D_2 \quad "$$

Length of spiral from D_2 to D_1 in 100' stations = $\frac{D_2 - D_1}{a}$

Note: To figure deflection angles, or length, for any point on above spiral simply substitute the value of D_p in place of D_2 or D_1 .

FULL TRANSITION SPIRAL.

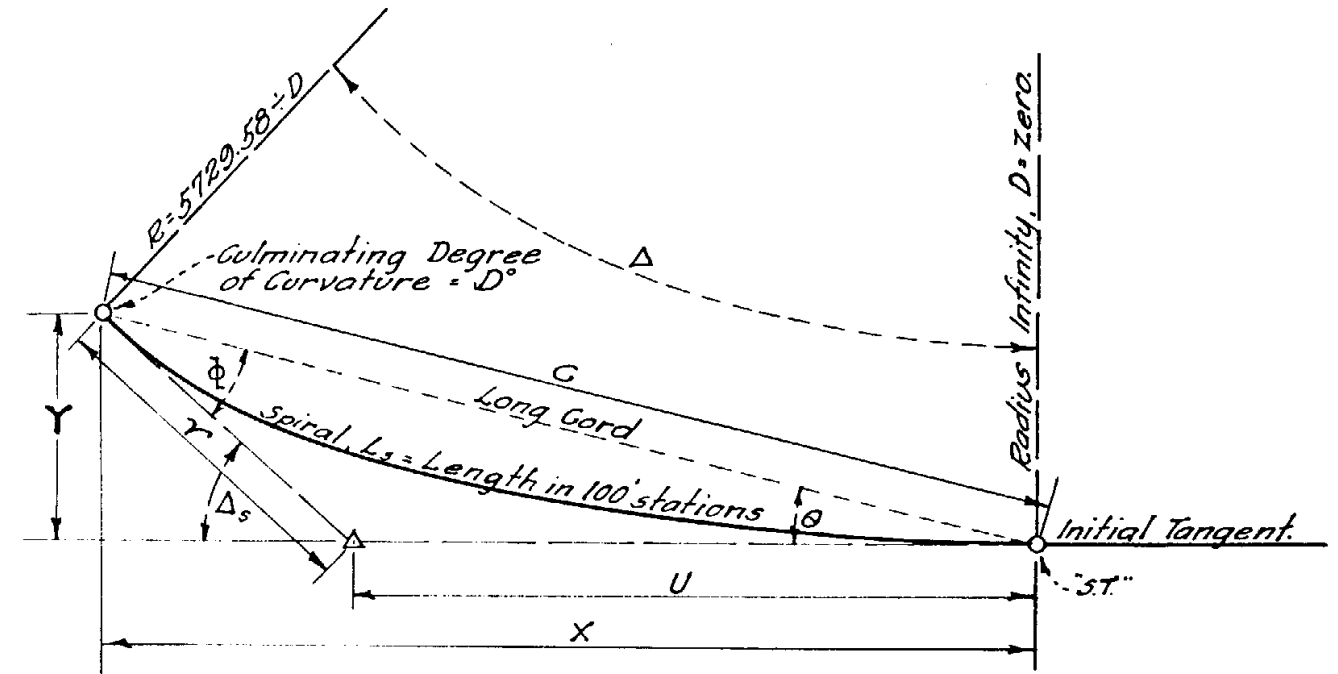

$D = \text{Gulminating Degree of curvature} = aL,$

L_s = Length of full spiral measured along spiral curve, expressed in 100' stations = $\frac{D}{a}$.

Note: For reasonably accurate field measurements, along spiral length 25' maximum chord lengths are recommended.

$$a = \text{Rate change in degree of curvature along spiral per } 100' = \frac{D}{L_s}$$

$$\Delta_s = \text{Central or deviation angle of full spiral, expressed in degrees} = \frac{1}{2} \alpha L_s^2 = \frac{1}{2} D L_s = \frac{1}{2} \frac{D}{\theta}^2$$

$$\theta = \text{Deflection angle of full spiral at "S.T." end} = \frac{1}{3}\Delta = \frac{1}{6}aL_s^2 = \frac{1}{6}DL_s = \frac{1}{6}\frac{D}{\rho} = \frac{1}{2}\phi.$$

$$\phi = \text{Deflection angle of full spiral at culmination end } \frac{2}{3}\Delta = 2\theta = \Delta - \theta$$

Expressed in feet.

$$C = 100 L_s - 0.00034 a^2 L_s^5$$

$$U = \frac{C \sin \phi}{\sin \Delta}$$

$$V = \frac{C \sin \theta}{\sin \Delta}$$


$$X = C \cos \theta$$

$$Y = C \sin \theta$$

Note: See Drug No. D-3-1 for determining proper L_s or a if neither is given.

ARIZONA HIGHWAY DEPARTMENT.		REV.
PLANS DIVISION		JUNE 1941
SPIRAL TRANSITION FOR COMPOUND CURVES AND FULL TRANSITION SPIRAL		AUG 1945
COMPILED BY	LESLIE McDOUGALL '37	DRAWING NO. D-3-2
TRACED BY	K.S. 4/7/38	
CHECKED BY	H.H.W. July 1938	
APPROVED BY	H.H.W. [Signature]	

α = RATE OF INCREASE IN DEGREES OF CURVATURE PER 100 FEET ON SPIRAL. (A CONSTANT)
 $100L_s$ = CUMULATED LENGTH IN FEET ON SPIRAL BEGINNING AT POINT "T.S." (L_s = FEET \div 100)
 $D = \alpha L_s$ = CULMINATING DEGREE OF CURVATURE ON SPIRAL. (COMPUTED IN DEGREES AND DECIMAL PARTS)
 (COINCIDES WITH "D" OF CIRCULAR ARC AT POINT "S.C.")

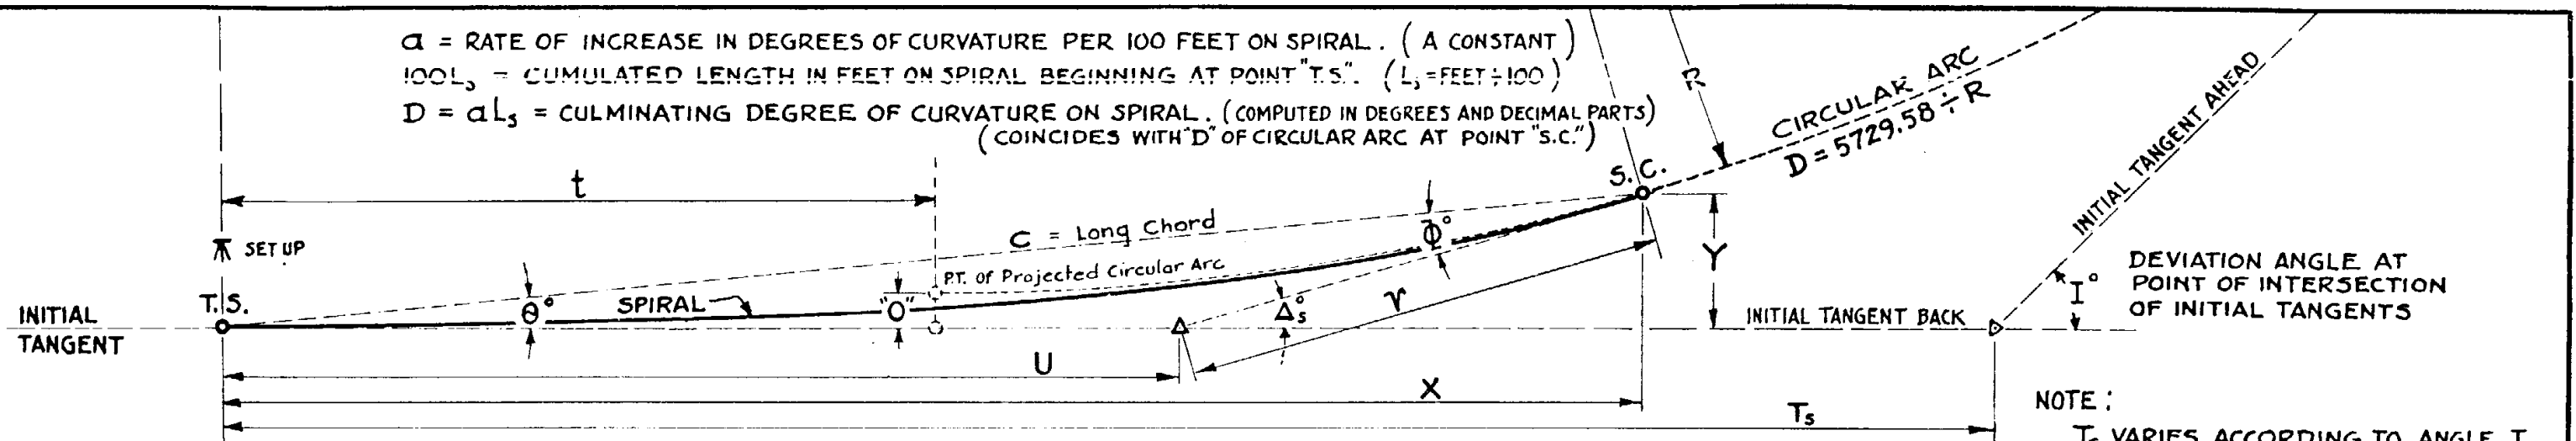


TABULATION OF SPIRAL FUNCTIONS AS RELATED TO π SET UP AT T.S. WHEN $\alpha = 1/3$

LENGTH FROM T.S. ALONG SPIRAL IN FEET = $100L_s$	D CULMINATING DEGREE OF CURVATURE = αL_s	R CORRESPONDING CIRCULAR ARC RADIUS IN FEET = $5729.58 \div D$	"O" RADIAL OFF SET IN FEET = $.0727\alpha L_s^3$	t IN FEET = $50L_s - .000127\alpha^2 L_s^3$	Δ_s DEVIATION ANGLE = $\frac{1}{2}\alpha L_s^2$	θ DEFLECTION FROM T.S. ONLY TO POINT ON SPIRAL = $\frac{1}{3}\Delta_s$	ϕ DEFLECTION FROM POINT ON SPIRAL TO T.S. ONLY = $\frac{2}{3}\Delta_s$	γ IN FEET = $\frac{C \sin \theta}{\sin \Delta_s}$	U IN FEET = $\frac{C \sin \phi}{\sin \Delta_s}$	C LONG CHORD IN FEET = $100L_s - .00034\alpha^2 L_s^3$	X IN FEET = $C \cos \theta$	Y IN FEET = $C \sin \theta$		
0	0°00'	INFINITY	0.00	0.00	0°00'00"	0°00'00"	0°00'00"	0.00	0.00	0.00	0.00	0.00		
25	0°05'	68,754.96	-	12.50	0°00'38"	0°00'13"	0°00'25"	8.33	16.67	25.00	25.00	-		
50	0°10'	34,377.48	-	25.00	0°02'30"	0°00'50"	0°01'40"	16.67	33.33	50.00	50.00	.01		
75	0°15'	22,918.32	.01	37.50	0°05'37"	0°01'52"	0°03'45"	25.00	50.00	75.00	75.00	.04		
100	0°20'	17,188.74	.02	50.00	0°10'	0°03'20"	0°06'40"	33.33	66.67	100.00	100.00	.09		
125	0°25'	13,750.99	.05	62.50	0°15'38"	0°05'13"	0°10'25"	41.67	83.33	125.00	125.00	.19		
150	0°30'	11,459.16	.08	75.00	0°22'30"	0°07'30"	0°15'	50.00	100.00	150.00	150.00	.33		
175	0°35'	9,822.14	.13	87.50	0°30'38"	0°10'13"	0°20'25"	58.33	116.67	175.00	175.00	.52		
200	0°40'	8,594.37	.19	100.00	0°40'	0°13'20"	0°26'40"	66.67	133.33	200.00	200.00	.78		
225	0°45'	7,639.44	.28	112.50	0°50'37"	0°16'52"	0°33'45"	75.00	150.00	225.00	225.00	1.07		
250	0°50'	6,875.50	.38	125.00	1°02'30"	0°20'50"	0°41'40"	83.33	166.67	250.00	250.00	1.52		
275	0°55'	6,250.45	.50	137.50	1°15'37"	0°25'12"	0°50'25"	91.67	183.33	275.00	274.99	2.02		
300	1°00'	5,729.58	.65	150.00	1°30'	0°30'	1°00'	100.00	200.00	299.99	299.98	2.62		
325	1°05'	5,288.43	.83	162.50	1°45'38"	0°35'13"	1°10'25"	108.35	216.67	324.99	324.97	3.33		
350	1°10'	4,911.07	1.04	174.99	2°02'30"	0°40'50"	1°21'40"	116.73	233.35	349.98	349.96	4.16		
375	1°15'	4,583.66	1.28	187.49	2°20'37"	0°46'52"	1°33'45"	125.00	250.06	374.97	374.94	5.11		
400	1°20'	4,297.19	1.55	199.99	2°40'	0°53'20"	1°46'40"	133.38	266.67	399.96	399.91	6.20		
425	1°25'	4,044.41	1.86	212.48	3°00'38"	1°00'13"	2°00'25"	141.69	283.34	424.95	424.88	7.44		
450	1°30'	3,819.72	2.21	224.97	3°22'30"	1°07'30"	2°15'	150.05	300.03	449.93	449.84	8.83		
475	1°35'	3,618.68	2.60	237.47	3°45'37"	1°15'12"	2°30'25"	158.36	316.77	474.91	474.80	10.39		
500	1°40'	3,437.75	3.03	249.96	4°10'	1°23'20"	2°46'40"	166.74	333.41	499.88	499.73	12.12		
525	1°45'	3,274.05	3.51	262.44	4°35'37"	1°31'52"	3°03'45"	175.10	350.11	524.85	524.66	14.02		
550	1°50'	3,125.23	4.03	274.93	5°02'30"	1°40'50"	3°21'40"	183.44	366.81	549.81	549.57	16.12		
575	1°55'	2,989.35	4.61	287.42	5°30'38"	1°50'13"	3°40'25"	191.84	383.47	574.76	574.46	18.42		
600	2°00'	2,864.79	5.23	299.90	6°00'	2°00'	4°00'	200.22	400.23	599.71	599.34	20.93		

FORMULA FOR COMPUTING DEFLECTION ANGLES α AND λ AHEAD AND BACK TO OTHER POINTS ON SPIRAL WHEN π SET UP IS AT A POINT ON SPIRAL.

α AND λ ANGLES ARE COMPUTED IN DEGREES AND DECIMAL PARTS

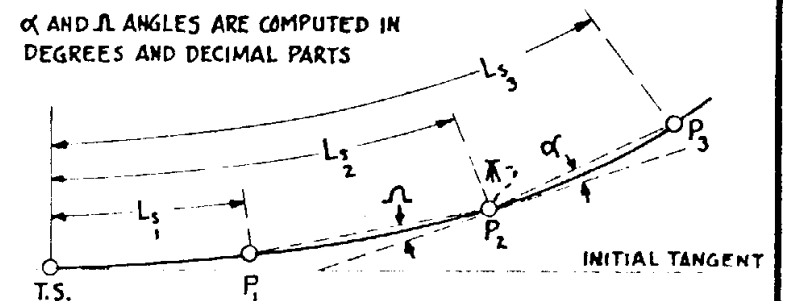

$$\alpha = \frac{1}{2} \alpha L_s (L_s - L_2) + \frac{1}{6} \alpha (L_s - L_2)^2$$

$$\lambda = \frac{1}{2} \alpha L_s (L_2 - L_1) - \frac{1}{6} \alpha (L_2 - L_1)^2$$

NOTE:

FOR ADDITIONAL DATA AND FORMULA RELATED TO THE USE OF TRANSITION SPIRAL: REFER TO STANDARD DRAWINGS NO. D 3-1 & D 3-2 FOR SUPERELEVATION REFER TO D 2-1 & D 2-2.

ARIZONA STATE HIGHWAY DEPARTMENT
PLANS DIVISION

REV.
8-16-48

TRANSITION SPIRAL TABLE FOR
 $\alpha = 1/3$

RECOMMENDED FOR 100 M.P.H. DESIGN SPEED

CALCULATED AND DRAWN APRIL 1941
BY LESLIE M'DOUGALL - HIGHWAY DESIGNER

TRACED BY L.M.D.

CHECKED BY

APPROVED BY


ENGINEER OF PLANS

H. Wessel

STANDARD DRWG. NO.

D 3-3

α = RATE OF INCREASE IN DEGREES OF CURVATURE PER 100 FEET ON SPIRAL. (A CONSTANT)
 $100L_s$ = CUMULATED LENGTH IN FEET ON SPIRAL BEGINNING AT POINT "T.S." (L_s = FEET \div 100)
 $D = \alpha L_s$ = CULMINATING DEGREE OF CURVATURE ON SPIRAL. (COMPUTED IN DEGREES AND DECIMAL PARTS)
 (COINCIDES WITH "D" OF CIRCULAR ARC AT POINT "S.C.")

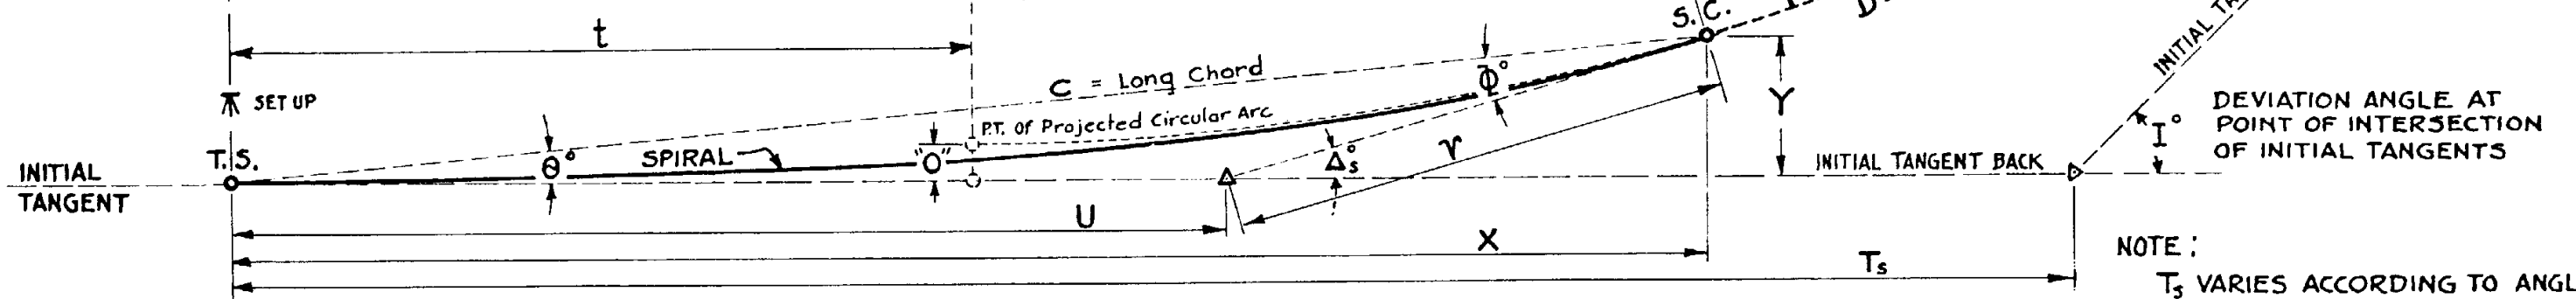


NOTE:
 T_s VARIES ACCORDING TO ANGLE I
 $T_s = \left[\left(\tan \frac{1}{2} I \right) (R + O'') \right] + t$

TABULATION OF SPIRAL FUNCTIONS AS RELATED TO π SET UP AT T.S. WHEN $\alpha = 1/2$

LENGTH FROM T.S. ALONG SPIRAL IN FEET = $100L_s$	D CULMINATING DEGREE OF CURVATURE = αL_s	R CORRESPONDING CIRCULAR ARC RADIUS IN FEET = $5729.58 \div D$	"O" RADIAL OFF SET IN FEET = $.0727 \alpha L_s^3$	t IN FEET = $50L_s - .000127 \alpha^2 L_s^3$	Δ_s DEVIATION ANGLE = $\frac{1}{2} \alpha L_s^2$	θ DEFLECTION FROM T.S. ONLY TO POINT ON SPIRAL = $\frac{1}{3} \Delta_s$	ϕ DEFLECTION FROM POINT ON SPIRAL TO T.S. ONLY = $\frac{2}{3} \Delta_s$	γ IN FEET = $\frac{C \sin \theta}{\sin \Delta_s}$	U IN FEET = $\frac{C \sin \phi}{\sin \Delta_s}$	C LONG CHORD IN FEET = $100L_s - .00034 \alpha^2 L_s^3$	X IN FEET = $C \cos \theta$	Y IN FEET = $C \sin \theta$
0	0°00'	INFINITY	0.00	0.00	0°00'00"	0°00'00"	0°00'00"	0.00	0.00	0.00	0.00	0.00
25	0°07'30"	45,836.64	-	12.50	0°00'56"	0°00'19"	0°00'37"	8.33	16.67	25.00	25.00	-
50	0°15'	22,918.32	.004	25.00	0°03'45"	0°01'15"	0°02'30"	16.67	33.33	50.00	50.00	.02
75	0°22'30"	15,278.88	.015	37.50	0°08'26"	0°02'49"	0°05'37"	25.00	50.00	75.00	75.00	.06
100	0°30'	11,459.16	.04	50.00	0°15'	0°05'	0°10'	33.33	66.67	100.00	100.00	.15
125	0°37'30"	9,167.32	.07	62.50	0°23'26"	0°07'49"	0°15'37"	41.67	83.33	125.00	125.00	.28
150	0°45'	7,639.44	.12	75.00	0°33'45"	0°11'15"	0°22'30"	50.00	100.00	150.00	150.00	.49
175	0°52'30"	6,548.09	.20	87.50	0°45'56"	0°15'19"	0°30'37"	58.33	116.67	175.00	175.00	.81
200	1°00'	5,729.58	.29	100.00	1°00'	0°20'	0°40'	66.67	133.33	200.00	200.00	1.16
225	1°07'30"	5,092.96	.41	112.50	1°15'56"	0°25'19"	0°50'37"	75.00	150.00	225.00	224.99	1.66
250	1°15'	4,583.66	.57	125.00	1°33'45"	0°31'15"	1°02'30"	83.36	166.64	249.99	249.98	2.27
275	1°22'30"	4,166.97	.76	137.49	1°53'26"	0°37'49"	1°15'37"	91.68	183.32	274.99	274.97	3.03
300	1°30'	3,819.72	.98	149.99	2°15'	0°45'	1°30'	100.02	200.01	299.98	299.95	3.93
325	1°37'30"	3,525.90	1.25	162.49	2°38'26"	0°52'49"	1°45'37"	108.41	216.71	324.97	324.93	4.99
350	1°45'	3,274.05	1.56	174.98	3°03'45"	1°01'15"	2°02'30"	116.67	233.35	349.96	349.90	6.23
375	1°52'30"	3,055.78	1.92	187.48	3°30'56"	1°10'19"	2°20'37"	125.05	249.96	374.94	374.86	7.67
400	2°00'	2,864.79	2.33	199.97	4°00'	1°20'	2°40'	133.40	266.74	399.91	399.80	9.31
425	2°07'30"	2,696.27	2.79	212.46	4°30'56"	1°30'19"	3°00'37"	141.78	283.43	424.88	424.73	11.16
450	2°15'	2,546.48	3.31	224.94	5°03'45"	1°41'15"	3°22'30"	150.15	300.14	449.84	449.64	13.25
475	2°22'30"	2,412.45	3.90	237.42	5°38'26"	1°52'49"	3°45'37"	158.45	316.80	474.79	474.53	15.58
500	2°30'	2,291.83	4.54	249.90	6°15'	2°05'	4°10'	166.85	333.52	499.73	499.40	18.17

FORMULA FOR COMPUTING DEFLECTION ANGLES α AND Δ AHEAD AND BACK TO OTHER POINTS ON SPIRAL WHEN π SET UP IS AT A POINT ON SPIRAL.

α AND Δ ANGLES ARE COMPUTED IN DEGREES AND DECIMAL PARTS

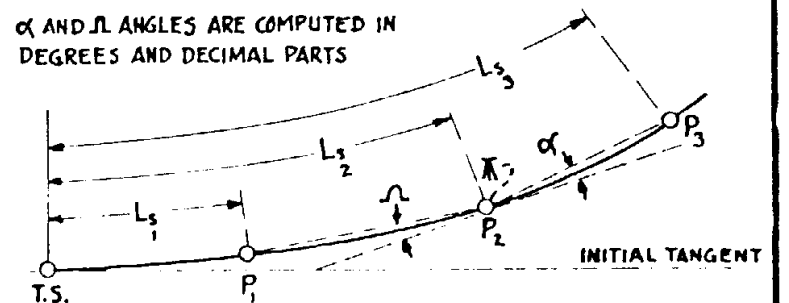

$$\alpha = \frac{1}{2} \alpha L_s \left(\frac{L_s - L_2}{L_3} \right) + \frac{1}{6} \alpha \left(\frac{L_s - L_2}{L_3} \right)^2$$

$$\Delta = \frac{1}{2} \alpha L_s \left(\frac{L_s - L_1}{L_2} \right) - \frac{1}{6} \alpha \left(\frac{L_s - L_1}{L_2} \right)^2$$

NOTE:
 FOR ADDITIONAL DATA AND FORMULAE RELATED TO THE USE OF TRANSITION SPIRALS REFER TO STANDARD DRAWINGS NO. D 3-1 & D 3-2 FOR SUPERELEVATION REFER TO D 2-1 & D 2-2

ARIZONA STATE HIGHWAY DEPARTMENT
 PLANS DIVISION

REV.
 12-13-54

TRANSITION SPIRAL TABLE FOR
 $\alpha = 1/2$

RECOMMENDED FOR 90 M.P.H. DESIGN SPEED

CALCULATED AND DRAWN APRIL 1941
 BY LESLIE M'DOUGALL - HIGHWAY DESIGNER

STANDARD DRWG. NO.

TRACED BY L.M.C.D.


CHECKED BY

APPROVED BY

ENGINEER OF PLANS

D 3-4

α = RATE OF INCREASE IN DEGREES OF CURVATURE PER 100 FEET ON SPIRAL. (A CONSTANT)
 $100L_s$ = CUMULATED LENGTH IN FEET ON SPIRAL BEGINNING AT POINT "T.S.". (L_s - FEET \div 100)
 $D = \alpha L_s$ = CULMINATING DEGREE OF CURVATURE ON SPIRAL. (COMPUTED IN DEGREES AND DECIMAL PARTS)
 (COINCIDES WITH "D" OF CIRCULAR ARC AT POINT "S.C.")

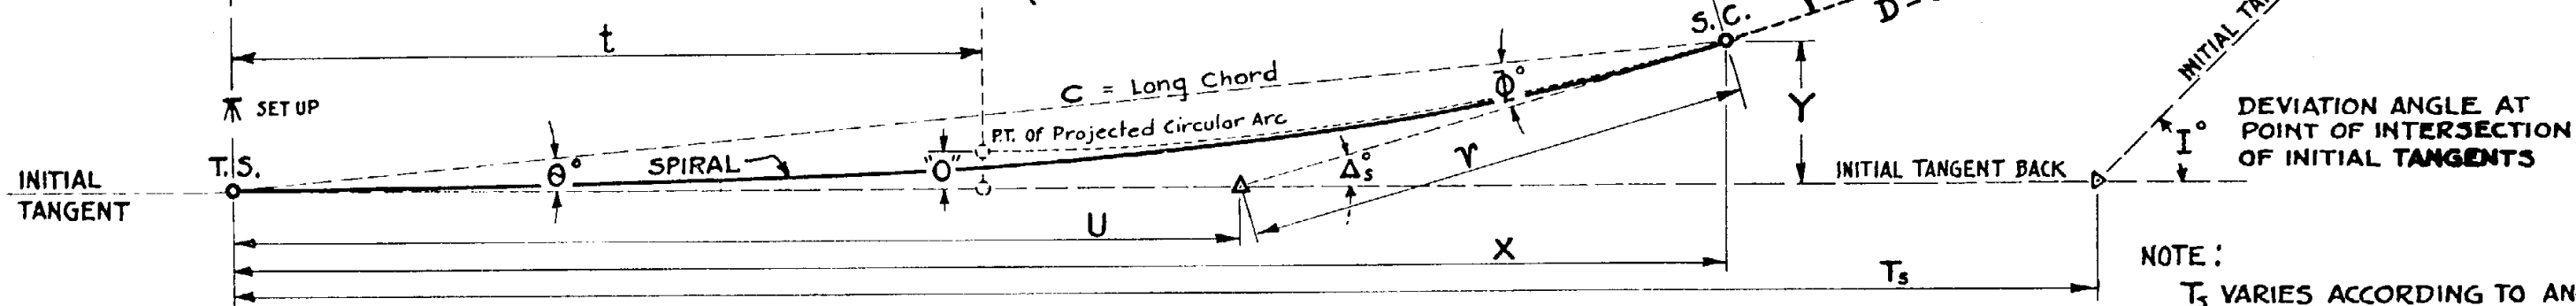


NOTE:
 T_s VARIES ACCORDING TO ANGLE I
 $T_s = \left[\left(\tan \frac{1}{2} I \right) (R + O) \right] + t$

TABULATION OF SPIRAL FUNCTIONS AS RELATED TO π SET UP AT T.S. WHEN $\alpha = \frac{2}{3}$

LENGTH FROM T.S. ALONG SPIRAL IN FEET = $100L_s$	D CULMINATING DEGREE OF CURVATURE = αL_s	R CORRESPONDING CIRCULAR ARC RADIUS IN FEET = $5729.58 \div D$	"O" RADIAL OFF SET IN FEET = $.0727 \alpha L_s^3$	t IN FEET = $50L_s - .000127 \alpha^2 L_s^5$	Δ_s DEVIATION ANGLE = $\frac{1}{2} \alpha L_s^2$	θ DEFLECTION FROM T.S. ONLY TO POINT ON SPIRAL = $\frac{1}{3} \Delta_s$	ϕ DEFLECTION FROM POINT ON SPIRAL TO T.S. ONLY = $\frac{2}{3} \Delta_s$	γ IN FEET = $\frac{C \sin \theta}{\sin \Delta_s}$	U IN FEET = $\frac{C \sin \phi}{\sin \Delta_s}$	C LONG CHORD IN FEET = $100L_s - .00034 \alpha^2 L_s^5$	X IN FEET = $C \cos \theta$	Y IN FEET = $C \sin \theta$
0	0°00'	INFINITY	0.00	0.00	0°00'00"	0°00'00"	0°00'00"	0.00	0.00	0.00	0.00	0.00
25	0°10'	34,377.48	-	12.50	0°01'15"	0°00'25"	0°00'50"	8.33	16.67	25.00	25.00	-
50	0°20'	17,188.74	.01	25.00	0°05'	0°01'40"	0°03'20"	16.67	33.33	50.00	50.00	.02
75	0°30'	11,459.16	.02	37.50	0°11'15"	0°03'45"	0°07'30"	25.00	50.00	75.00	75.00	.08
100	0°40'	8,594.37	.05	50.00	0°20'	0°06'40"	0°13'20"	33.33	66.67	100.00	100.00	.19
125	0°50'	6,875.50	.10	62.50	0°31'15"	0°10'25"	0°20'50"	41.67	83.33	125.00	125.00	.38
150	1°00'	5,729.58	.16	75.00	0°45'	0°15'	0°30'	50.00	100.00	150.00	150.00	.65
175	1°10'	4,911.07	.26	87.50	1°01'15"	0°20'25"	0°40'50"	58.33	116.67	175.00	175.00	1.04
200	1°20'	4,297.19	.39	100.00	1°20'	0°26'40"	0°53'20"	66.67	133.33	200.00	199.99	1.55
225	1°30'	3,819.72	.55	112.50	1°41'15"	0°33'45"	1°07'30"	75.00	150.00	224.99	224.98	2.21
250	1°40'	3,437.75	.76	124.99	2°05'	0°41'40"	1°23'20"	83.33	166.67	249.99	249.97	3.03
275	1°50'	3,125.23	1.01	137.49	2°31'15"	0°50'25"	1°40'50"	91.67	183.33	274.98	274.95	4.03
300	2°00'	2,864.79	1.31	149.99	3°00'	1°00'	2°00'	100.01	200.01	299.96	299.91	5.24
325	2°10'	2,644.42	1.66	162.48	3°31'15"	1°10'25"	2°20'50"	108.37	216.68	324.94	324.87	6.66
350	2°20'	2,455.53	2.08	174.98	4°05'	1°21'40"	2°43'20"	116.72	233.40	349.92	349.82	8.31
375	2°30'	2,291.83	2.56	187.46	4°41'15"	1°33'45"	3°07'30"	125.09	250.08	374.89	374.75	10.22
400	2°40'	2,148.59	3.10	199.94	5°20'	1°46'40"	3°33'20"	133.45	266.78	399.85	399.66	12.40
425	2°50'	2,022.20	3.72	212.42	6°01'15"	2°00'25"	4°00'50"	141.83	283.49	424.79	424.53	14.88
450	3°00'	1,909.86	4.41	224.90	6°45'	2°15'	4°30'	150.21	300.20	449.72	449.37	17.66
475	3°10'	1,809.34	5.19	237.36	7°31'15"	2°30'25"	5°00'50"	158.63	316.95	474.63	474.18	20.76

FORMULA FOR COMPUTING DEFLECTION ANGLES α AND Ω AHEAD AND BACK TO OTHER POINTS ON SPIRAL. WHEN π SET UP IS AT A POINT ON SPIRAL

α AND Ω ANGLES ARE COMPUTED IN DEGREES AND DECIMAL PARTS

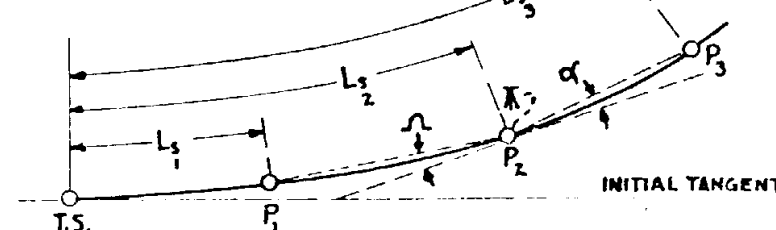

$$\alpha = \frac{1}{2} \alpha L_s (L_s - L_2) + \frac{1}{6} \alpha (L_s - L_2)^2$$

$$\Omega = \frac{1}{2} \alpha L_s (L_2 - L_1) - \frac{1}{6} \alpha (L_2 - L_1)^2$$

NOTE:
 FOR ADDITIONAL DATA AND FORMULAE RELATED TO THE USE OF TRANSITION SPIRALS REFER TO STANDARD DRAWINGS NO. D 3-1 & D 3-2. FOR SUPERELEVATION REFER TO D 2-1 & D 2-2.

ARIZONA STATE HIGHWAY DEPARTMENT
 PLANS DIVISION

REV.
 9/19/46

TRANSITION SPIRAL TABLE FOR
 $\alpha = \frac{2}{3}$

RECOMMENDED FOR 80 M.P.H. DESIGN SPEED

CALCULATED AND DRAWN APRIL 1941
 BY LESLIE M'DOUGALL - HIGHWAY DESIGNER

TRACED BY L.M.D.

CHECKED BY

APPROVED BY


ENGINEER OF PLANS

H.H. Jessel

STANDARD DRWG. NO.

D 3-5

α = RATE OF INCREASE IN DEGREES OF CURVATURE PER 100 FEET ON SPIRAL. (A CONSTANT)
 $100L_s$ = CUMULATED LENGTH IN FEET ON SPIRAL BEGINNING AT POINT "T.S.". (L_s = FEET \div 100)
 $D = \alpha L_s$ = CULMINATING DEGREE OF CURVATURE ON SPIRAL. (COMPUTED IN DEGREES AND DECIMAL PARTS)
 (COINCIDES WITH "D" OF CIRCULAR ARC AT POINT "S.C.")

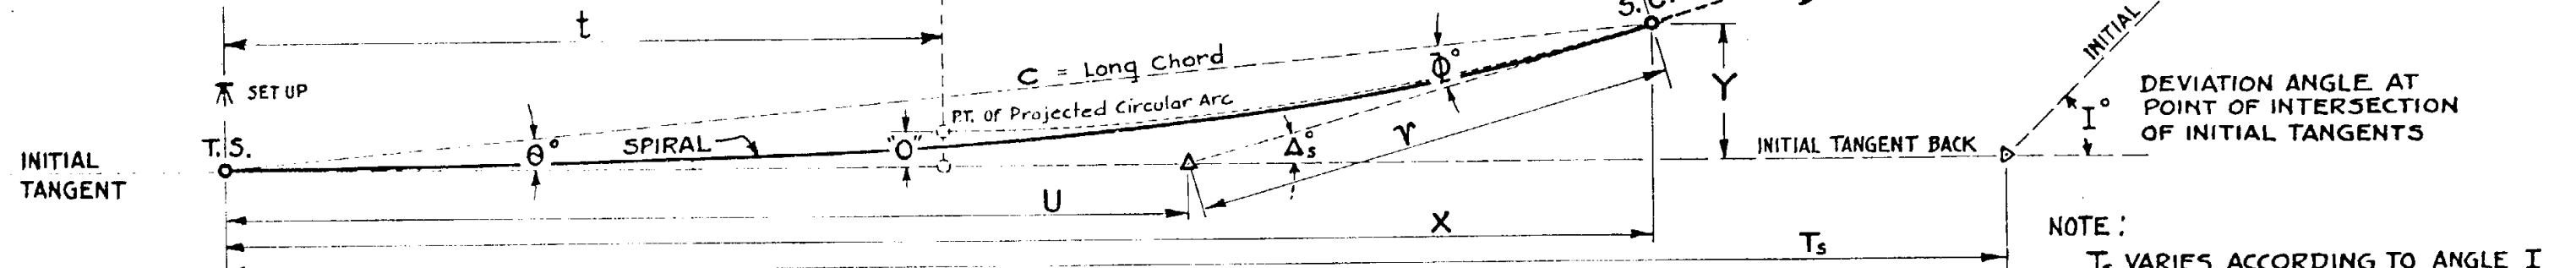


NOTE:
 T_s VARIES ACCORDING TO ANGLE I
 $T_s = \left[\left(\tan \frac{1}{2} I \right) (R + 0) \right] + t$

TABULATION OF SPIRAL FUNCTIONS AS RELATED TO π SET UP AT T.S. WHEN $\alpha = 1$

LENGTH FROM T.S. ALONG SPIRAL IN FEET = $100L_s$	D CULMINATING DEGREE OF CURVATURE = αL_s	R CORRESPONDING CIRCULAR ARC RADIUS IN FEET = $5729.58 \div D$	"O" RADIAL OFFSET IN FEET = $.0727 \alpha L_s^3$	t IN FEET = $50L_s - .000127 \alpha^2 L_s^5$	Δ_s DEVIATION ANGLE = $\frac{1}{2} \alpha L_s^2$	θ DEFLECTION FROM T.S. ONLY TO POINT ON SPIRAL = $\frac{1}{3} \Delta_s$	ϕ DEFLECTION FROM POINT ON SPIRAL TO T.S. ONLY = $\frac{2}{3} \Delta_s$	γ IN FEET = $\frac{C \sin \theta}{\sin \Delta_s}$	U IN FEET = $\frac{C \sin \phi}{\sin \Delta_s}$	C LONG CHORD IN FEET = $100L_s - .00034 \alpha^2 L_s^5$	X IN FEET = $C \cos \theta$	Y IN FEET = $C \sin \theta$
0	0°00'	INFINITY	0.00	0.00	0°00'00"	0°00'00"	0°00'00"	0.00	0.00	0.00	0.00	0.00
25	0°15'	22,918.32	—	12.50	0°01'53"	0°00'38"	0°01'15"	8.33	16.67	25.00	25.00	—
50	0°30'	11,459.16	.01	25.00	0°07'30"	0°02'30"	0°05'15"	16.67	33.33	50.00	50.00	.04
75	0°45'	7,639.44	.03	37.50	0°16'53"	0°05'38"	0°11'15"	25.00	50.00	75.00	75.00	.11
100	1°00'	5,729.58	.07	50.00	0°30'00"	0°10'00"	0°20'00"	33.33	66.67	100.00	100.00	.29
125	1°15'	4,583.66	.14	62.50	0°46'53"	0°15'38"	0°31'15"	41.67	83.33	125.00	125.00	.57
150	1°30'	3,819.72	.25	75.00	1°07'30"	0°22'30"	0°45'00"	50.00	100.00	150.00	150.00	.98
175	1°45'	3,274.05	.39	87.50	1°31'53"	0°30'38"	1°01'15"	58.36	116.64	174.99	174.98	1.56
200	2°00'	2,864.79	.58	100.00	2°00'00"	0°40'00"	1°20'00"	66.70	133.35	199.99	199.98	2.33
225	2°15'	2,546.48	.83	112.49	2°31'53"	0°50'38"	1°41'15"	75.00	150.03	224.98	224.96	3.31
250	2°30'	2,291.83	1.14	124.99	3°07'30"	1°02'30"	2°05'00"	83.34	166.68	249.97	249.93	4.54
275	2°45'	2,083.48	1.51	137.48	3°46'53"	1°15'38"	2°31'15"	91.73	183.38	274.95	274.88	6.05
300	3°00'	1,909.86	1.96	149.97	4°30'00"	1°30'00"	3°00'00"	100.08	200.07	299.92	299.82	7.85
325	3°15'	1,762.95	2.50	162.45	5°16'53"	1°45'38"	3°31'15"	108.44	216.75	324.87	324.72	9.98
350	3°30'	1,637.02	3.12	174.93	6°07'30"	2°02'30"	4°05'00"	116.80	233.48	349.82	349.60	12.46
375	3°45'	1,527.89	3.83	187.41	7°01'53"	2°20'38"	4°41'15"	125.19	250.18	374.75	374.44	15.33
400	4°00'	1,432.40	4.65	199.87	8°00'00"	2°40'00"	5°20'00"	133.62	266.92	399.65	399.22	18.59
425	4°15'	1,348.14	5.58	212.32	9°01'53"	3°00'38"	6°01'15"	142.05	283.67	424.53	423.94	22.30

FORMULA FOR COMPUTING DEFLECTION ANGLES α AND λ AHEAD AND BACK TO OTHER POINTS ON SPIRAL WHEN π SET UP IS AT A POINT ON SPIRAL.
 α AND λ ANGLES ARE COMPUTED IN DEGREES AND DECIMAL PARTS

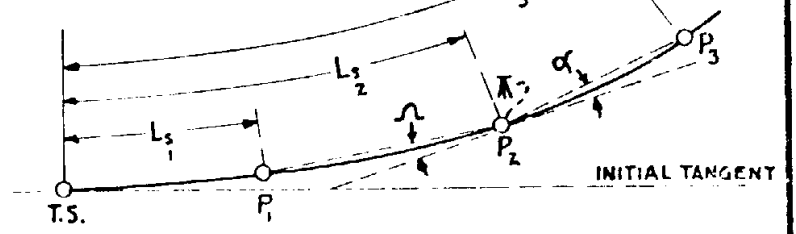


$$\alpha = \frac{1}{2} \alpha L_s \left(L_s - L_2 \right) + \frac{1}{6} \alpha \left(L_s - L_2 \right)^2$$

$$\lambda = \frac{1}{2} \alpha L_s \left(L_s - L_1 \right) - \frac{1}{6} \alpha \left(L_s - L_1 \right)^2$$

NOTE:
 FOR ADDITIONAL DATA AND FORMULAE RELATED TO THE USE OF TRANSITION SPIRALS REFER TO STANDARD DRAWINGS NO. D 3-1 & D 3-2. FOR SUPERELEVATION REFER TO D 2-1 & D 2-2.

ARIZONA STATE HIGHWAY DEPARTMENT PLANS DIVISION		REV.
TRANSITION SPIRAL TABLE FOR $\alpha = 1$		
RECOMMENDED FOR 70 M.P.H. DESIGN SPEED		
CALCULATED AND DRAWN APRIL 1941 BY LESLIE M'DOUGALL - HIGHWAY DESIGNER		STANDARD DRWG. NO.
TRACED BY L.M.D.		D 3-6
CHECKED BY		
APPROVED BY ENGINEER OF PLANS <i>H.H. Wessell</i>		

α = RATE OF INCREASE IN DEGREES OF CURVATURE PER 100 FEET ON SPIRAL. (A CONSTANT)
 $100L_s$ = CUMULATED LENGTH IN FEET ON SPIRAL BEGINNING AT POINT "T.S.". (L_s = FEET \div 100)
 $D = \alpha L_s$ = CULMINATING DEGREE OF CURVATURE ON SPIRAL. (COMPUTED IN DEGREES AND DECIMAL PARTS)
 (COINCIDES WITH "D" OF CIRCULAR ARC AT POINT "S.C.")

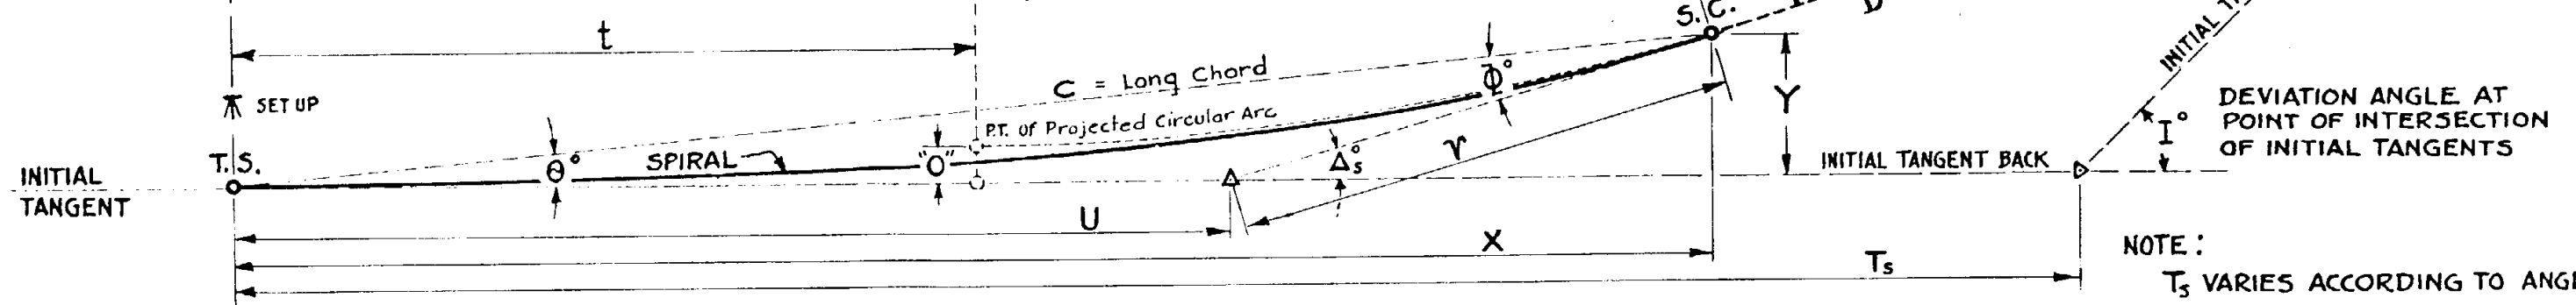


TABULATION OF SPIRAL FUNCTIONS AS RELATED TO π SET UP AT T.S. WHEN $\alpha = 1\frac{1}{3}$

LENGTH FROM T.S. ALONG SPIRAL IN FEET = $100L_s$	D CULMINATING DEGREE OF CURVATURE = αL_s	R CORRESPONDING CIRCULAR ARC RADIUS IN FEET = $5729.58 \div D$	"O" RADIAL OFF SET IN FEET = $.0727 \alpha L_s^3$	t IN FEET = $50L_s$, - $.000127 \alpha^2 L_s^5$	Δ_s DEVIATION ANGLE = $\frac{1}{2} \alpha L_s^2$	θ DEFLECTION FROM T.S. ONLY TO POINT ON SPIRAL = $\frac{1}{3} \Delta_s$	ϕ DEFLECTION FROM POINT ON SPIRAL TO T.S. ONLY = $\frac{2}{3} \Delta_s$	γ IN FEET = $\frac{C \sin \theta}{\sin \Delta_s}$	U IN FEET = $\frac{C \sin \phi}{\sin \Delta_s}$	C LONG CHORD IN FEET = $100L_s$, - $.00034 \alpha^2 L_s^5$	X IN FEET = $C \cos \theta$	Y IN FEET = $C \sin \theta$
0	0°00'	INFINITY	0.00	0.00	0°00'00"	0°00'00"	0°00'00"	0.00	0.00	0.00	0.00	0.00
25	0°20'	17,188.74	—	12.50	0°02'36"	0°00'50"	0°01'40"	8.33	16.67	25.00	25.00	.01
50	0°40'	8,594.37	.01	25.00	0°10'	0°03'20"	0°06'40"	16.67	33.33	50.00	50.00	.05
75	1°00'	5,729.58	.04	37.50	0°22'30"	0°07'30"	0°15'	25.00	50.00	75.00	75.00	.16
100	1°20'	4,297.19	.10	50.00	0°40'	0°13'20"	0°26'40"	33.33	66.67	100.00	100.00	.39
125	1°40'	3,437.75	.19	62.50	1°02'30"	0°20'50"	0°41'40"	41.67	83.33	125.00	125.00	.76
150	2°00'	2,864.79	.33	75.00	1°30'	0°30'	1°00'	50.00	100.01	150.00	150.00	1.31
175	2°20'	2,455.53	.52	87.50	2°02'30"	0°40'50"	1°21'40"	58.34	116.67	174.99	174.98	2.08
200	2°40'	2,148.59	.78	99.99	2°40'	0°53'20"	1°46'40"	66.68	133.35	199.98	199.96	3.10
225	3°00'	1,909.86	1.10	112.49	3°22'30"	1°07'30"	2°15'	75.03	150.03	224.97	224.93	4.42
250	3°20'	1,718.87	1.51	124.98	4°10'	1°23'20"	2°46'40"	83.38	166.71	249.94	249.87	6.06
275	3°40'	1,562.61	2.02	137.46	5°02'30"	1°40'50"	3°21'40"	91.74	183.40	274.90	274.78	8.06
300	4°00'	1,432.40	2.62	149.94	6°00'	2°00'	4°00'	100.11	200.10	299.85	299.67	10.46
325	4°20'	1,322.21	3.33	162.42	7°02'30"	2°20'50"	4°41'40"	108.50	216.82	324.78	324.51	13.30
350	4°40'	1,227.77	4.16	174.88	8°10'	2°43'20"	5°26'40"	116.91	233.56	349.68	349.29	16.61
375	5°00'	1,145.92	5.11	187.33	9°22'30"	3°07'30"	6°15'	125.35	250.32	374.55	373.99	20.42

FORMULA FOR COMPUTING DEFLECTION ANGLES α AND Ω AHEAD AND BACK TO OTHER POINTS ON SPIRAL WHEN π SET UP IS AT A POINT ON SPIRAL.

α AND Ω ANGLES ARE COMPUTED IN DEGREES AND DECIMAL PARTS

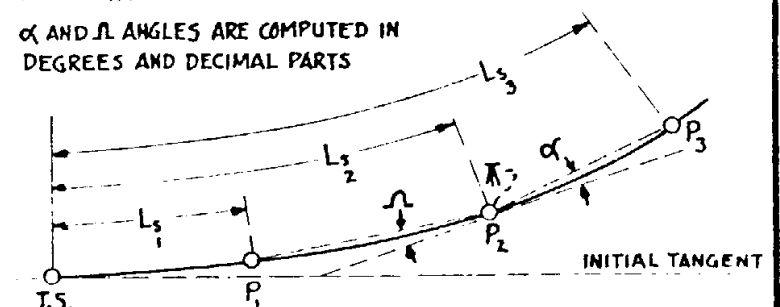

$$\alpha = \frac{1}{2} \alpha L_s (L_s - L_2) + \frac{1}{6} \alpha (L_s - L_2)^2$$

$$\Omega = \frac{1}{2} \alpha L_s (L_s - L_1) - \frac{1}{6} \alpha (L_s - L_1)^2$$

NOTE:

FOR ADDITIONAL DATA AND FORMULAE RELATED TO THE USE OF TRANSITION SPIRALS REFER TO STANDARD DRAWINGS NO. D 3-1 & D 3-2 FOR SUPERELEVATION REFER TO D 2-1 & D 2-2

ARIZONA STATE HIGHWAY DEPARTMENT
PLANS DIVISION

TRANSITION SPIRAL TABLE FOR
 $\alpha = 1\frac{1}{3}$

RECOMMENDED FOR 65 M.P.H. DESIGN SPEED

CALCULATED AND DRAWN APRIL 1941
BY LESLIE McDUGALL - HIGHWAY DESIGNER

TRACED BY L.M.D.

CHECKED BY

APPROVED BY


ENGINEER OF PLANS

STANDARD DRWG. NO.

D 3-7

REV.

α = RATE OF INCREASE IN DEGREES OF CURVATURE PER 100 FEET ON SPIRAL. (A CONSTANT)
 $100L_s$ = CUMULATED LENGTH IN FEET ON SPIRAL BEGINNING AT POINT "T.S.". (L_s = FEET : 100)
 $D = \alpha L_s$ = CULMINATING DEGREE OF CURVATURE ON SPIRAL. (COMPUTED IN DEGREES AND DECIMAL PARTS)
 (COINCIDES WITH "D" OF CIRCULAR ARC AT POINT "S.C.")

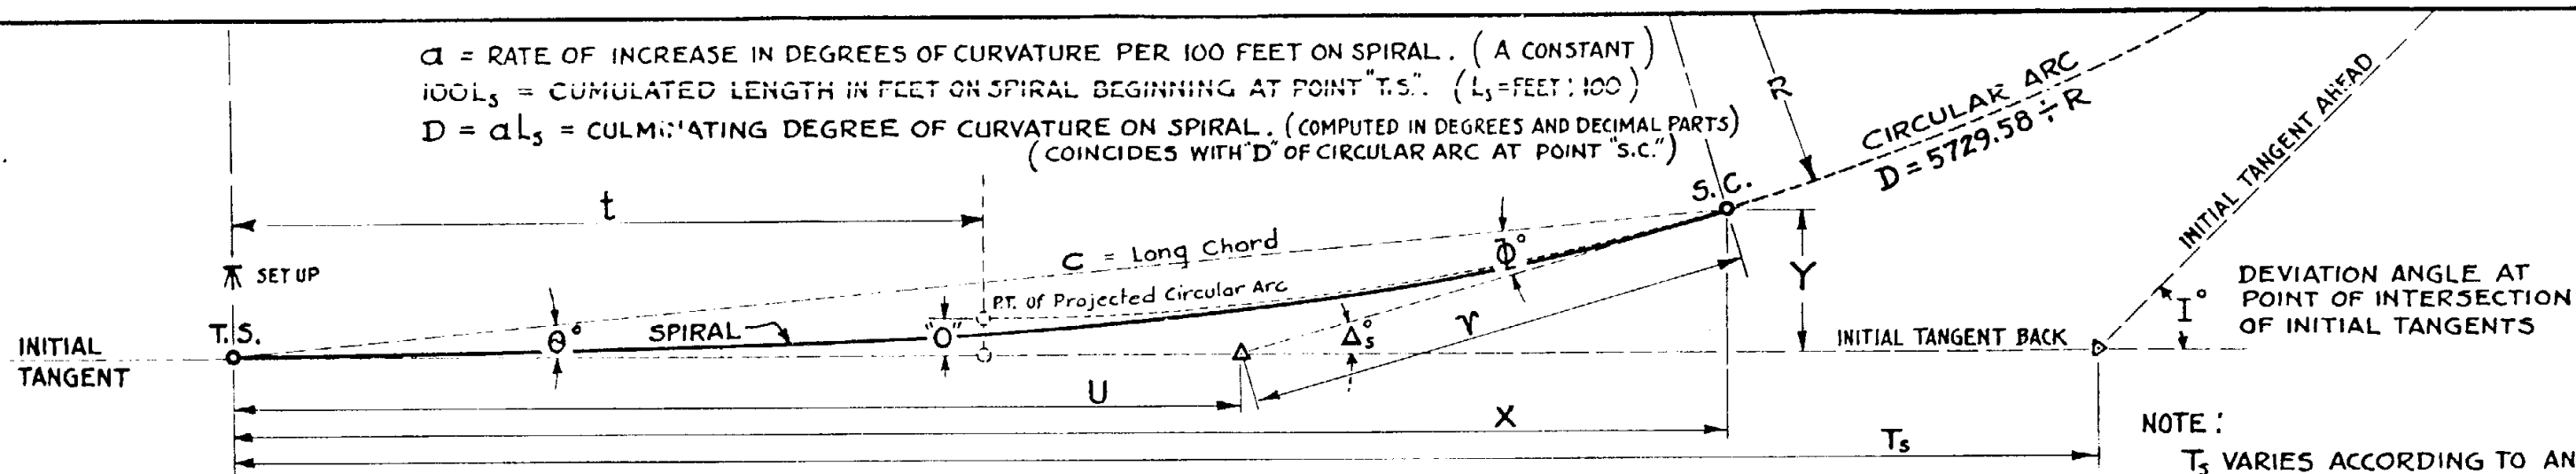


TABULATION OF SPIRAL FUNCTIONS AS RELATED TO π SET UP AT T.S. WHEN $\alpha = 1\frac{2}{3}$

LENGTH FROM T.S. ALONG SPIRAL IN FEET = $100L_s$	D CULMINATING DEGREE OF CURVATURE = αL_s	R CORRESPONDING CIRCULAR ARC RADIUS IN FEET = $5729.58 \div D$	"O" RADIAL OFF SET IN FEET = $.0727 \alpha L_s^3$	t IN FEET = $50L_s - .000127 \alpha^2 L_s^3$	Δ_s DEVIATION ANGLE = $\frac{1}{2} \alpha L_s^2$	θ DEFLECTION FROM T.S. ONLY TO POINT ON SPIRAL = $\frac{1}{3} \Delta_s$	ϕ DEFLECTION FROM POINT ON SPIRAL TO T.S. ONLY = $\frac{2}{3} \Delta_s$	γ IN FEET = $\frac{C \sin \theta}{\sin \Delta_s}$	U IN FEET = $\frac{C \sin \phi}{\sin \Delta_s}$	C LONG CHORD IN FEET = $100L_s - .00034 \alpha^2 L_s^3$	X IN FEET = $C \cos \theta$	Y IN FEET = $C \sin \theta$
0	0°00'	INFINITY	0.00	0.00	0°00'00"	0°00'00"	0°00'00"	0.00	0.00	0.00	0.00	0.00
10	0°10'	34,377.48	—	5.00	0°00'30"	0°00'10"	0°00'20"	3.33	6.67	10.00	10.00	—
20	0°20'	17,188.74	—	10.00	0°02'00"	0°00'40"	0°01'20"	6.67	13.33	20.00	20.00	—
30	0°30'	11,459.16	—	15.00	0°04'30"	0°01'30"	0°03'00"	10.00	20.00	30.00	30.00	.01
40	0°40'	8,594.37	.01	20.00	0°08'00"	0°02'40"	0°05'20"	13.33	26.67	40.00	40.00	.03
50	0°50'	6,875.50	.02	25.00	0°12'30"	0°04'10"	0°08'20"	16.67	33.33	50.00	50.00	.06
60	1°00'	5,729.58	.03	30.00	0°18'00"	0°06'00"	0°12'00"	20.00	40.00	60.00	60.00	.10
70	1°10'	4,911.07	.04	35.00	0°24'30"	0°08'10"	0°16'20"	23.33	46.67	70.00	70.00	.17
80	1°20'	4,297.19	.06	40.00	0°32'00"	0°10'40"	0°21'20"	26.67	53.33	80.00	80.00	.25
90	1°30'	3,819.72	.09	45.00	0°40'30"	0°13'30"	0°27'00"	30.00	60.00	90.00	90.00	.35
100	1°40'	3,437.75	.12	50.00	0°50'00"	0°16'40"	0°33'20"	33.33	66.67	100.00	100.00	.48
110	1°50'	3,125.23	.16	55.00	1°00'30"	0°20'10"	0°40'20"	36.67	73.33	110.00	110.00	.65
120	2°00'	2,864.79	.21	60.00	1°12'00"	0°24'00"	0°48'00"	40.00	80.00	120.00	120.00	.84
130	2°10'	2,644.42	.26	65.00	1°24'30"	0°28'10"	0°56'20"	43.33	86.67	130.00	130.00	1.07
140	2°20'	2,455.53	.33	70.00	1°38'00"	0°32'40"	1°05'20"	46.67	93.33	139.99	139.98	1.33
150	2°30'	2,291.83	.41	75.00	1°52'30"	0°37'30"	1°15'00"	50.00	100.00	149.99	149.98	1.64
160	2°40'	2,148.59	.50	80.00	2°08'00"	0°42'40"	1°25'20"	53.33	106.67	159.99	159.98	1.99
170	2°50'	2,022.20	.59	85.00	2°24'30"	0°48'10"	1°36'20"	56.67	113.33	169.99	169.97	2.38
180	3°00'	1,909.86	.70	90.00	2°42'00"	0°54'00"	1°48'00"	60.02	120.00	179.98	179.95	2.83
190	3°10'	1,809.34	.83	94.99	3°00'30"	1°00'10"	2°00'20"	63.34	126.68	189.98	189.95	3.32
200	3°20'	1,718.87	.97	99.99	3°20'00"	1°06'40"	2°13'20"	66.70	133.37	199.97	199.93	3.88
210	3°30'	1,637.02	1.12	104.99	3°40'30"	1°13'30"	2°27'00"	70.02	140.03	209.96	209.91	4.49
220	3°40'	1,562.61	1.29	109.98	4°02'00"	1°20'40"	2°41'20"	73.37	146.71	219.95	219.89	5.16
230	3°50'	1,494.67	1.48	114.98	4°24'30"	1°28'10"	2°56'20"	76.72	153.36	229.94	229.86	5.90
240	4°00'	1,432.40	1.67	119.97	4°48'00"	1°36'00"	3°12'00"	80.05	160.04	239.92	239.84	6.70
250	4°10'	1,375.10	1.89	124.97	5°12'30"	1°44'10"	3°28'20"	83.41	166.75	249.91	249.70	7.57
260	4°20'	1,322.21	2.13	129.96	5°38'00"	1°52'40"	3°45'20"	86.74	173.41	259.89	259.75	8.52
270	4°30'	1,273.24	2.38	134.95	6°04'30"	2°01'30"	4°03'00"	90.10	180.10	269.86	269.69	9.54
280	4°40'	1,227.77	2.66	139.94	6°32'00"	2°10'40"	4°21'20"	93.47	186.79	279.84	279.64	10.63
290	4°50'	1,185.43	2.96	144.93	7°00'30"	2°20'10"	4°40'20"	96.81	193.48	289.81	289.57	11.81
300	5°00'	1,145.92	3.27	149.91	7°30'00"	2°30'00"	5°00'00"	100.18	200.17	299.77	299.48	13.08
310	5°10'	1,108.95	3.61	154.90	8°00'30"	2°40'10"	5°20'20"	103.55	206.87	309.73	309.39	14.43
320	5°20'	1,074.30	3.97	159.88	8°32'00"	2°50'40"	5°41'20"	106.91	213.57	319.68	319.29	15.86
330	5°30'	1,041.74	4.35	164.86	9°04'30"	3°01'30"	6°03'00"	110.29	220.28	329.63	329.17	17.40
340	5°40'	1,011.10	4.76	169.84	9°38'00"	3°12'40"	6°25'20"	113.66	226.98	339.57	339.04	19.02
350	5°50'	982.21	5.20	174.81	10°12'30"	3°24'10"	6°48'20"	117.06	233.68	349.50	348.88	20.74
360	6°00'	954.93	5.65	179.79	10°48'00"	3°36'00"	7°12'00"	120.44	240.41	359.43	358.72	22.57

FORMULA FOR COMPUTING DEFLECTION ANGLES α AND Δ AHEAD AND BACK TO OTHER POINTS ON SPIRAL WHEN π SET UP IS AT A POINT ON SPIRAL.

α AND Δ ANGLES ARE COMPUTED IN DEGREES AND DECIMAL PARTS

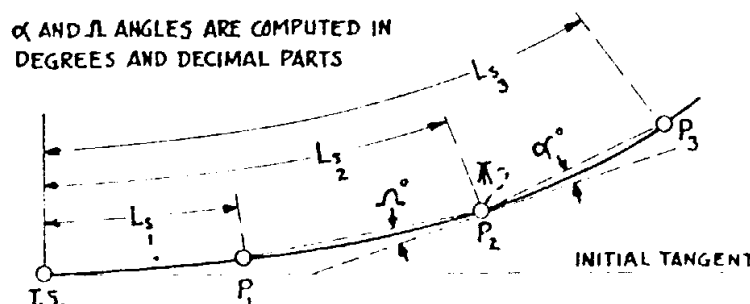

$$\alpha = \frac{1}{2} \alpha L_s (L_3 - L_2) + \frac{1}{6} \alpha (L_3 - L_2)^2$$

$$\Delta = \frac{1}{2} \alpha L_s (L_2 - L_1) - \frac{1}{6} \alpha (L_2 - L_1)^2$$

NOTE :

FOR ADDITIONAL DATA AND FORMULAE RELATED TO THE USE OF TRANSITION SPIRALS REFER TO STANDARD DRAWINGS NO. D 3-1 & D 3-2. FOR SUPERELEVATION REFER TO D 2-1 & D 2-2.

ARIZONA STATE HIGHWAY DEPARTMENT
PLANS DIVISION

TRANSITION SPIRAL TABLE FOR
 $\alpha = 1\frac{2}{3}$

RECOMMENDED FOR 60 M.P.H. DESIGN SPEED

CALCULATED AND DRAWN APRIL 1941
BY LESLIE McDUGALL - HIGHWAY DESIGNER

TRACED BY L.M.C.D.


CHECKED BY

APPROVED BY

ENGINEER OF PLANS

STANDARD DRWG. NO.

D 3-8

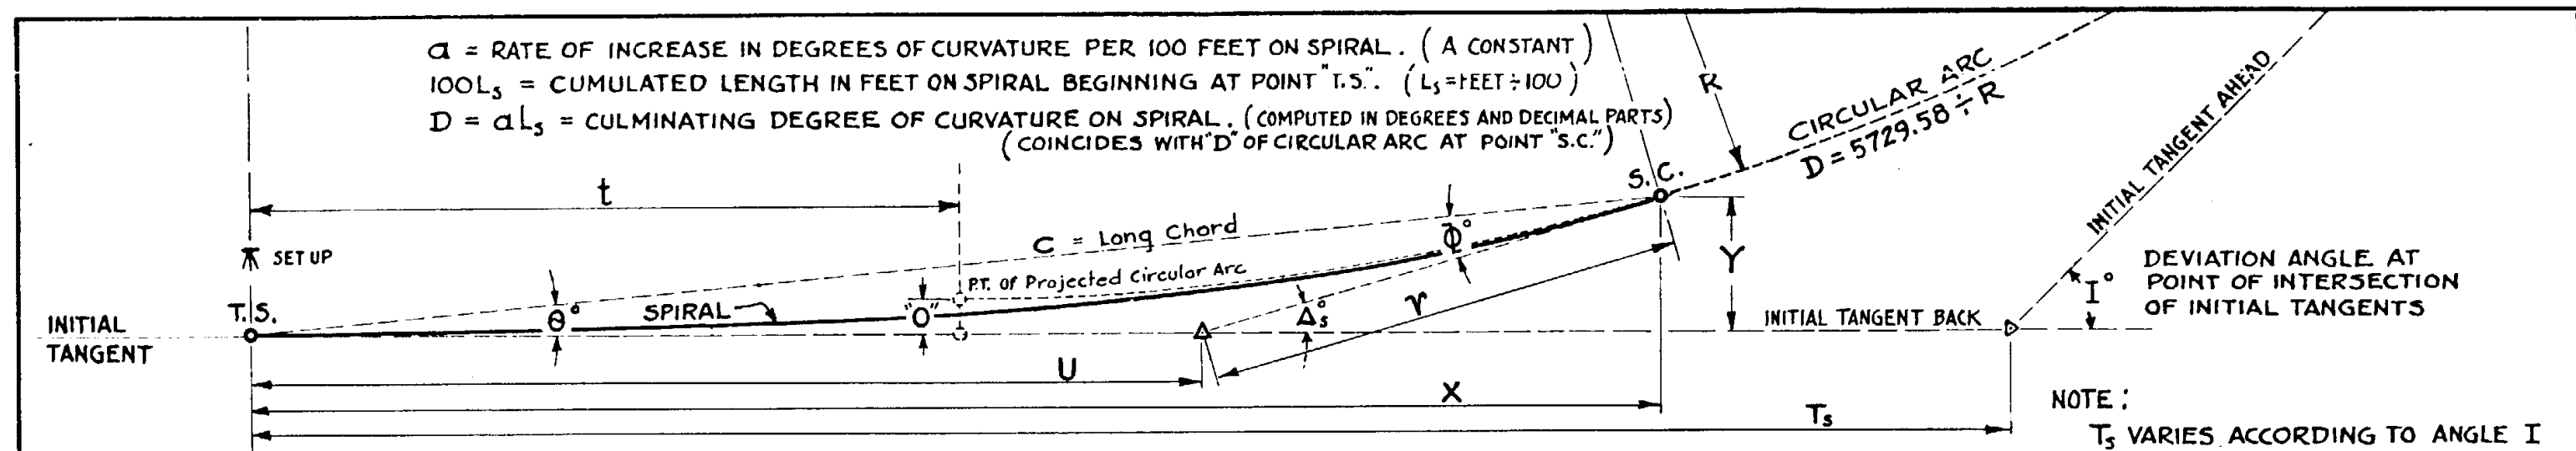


TABULATION OF SPIRAL FUNCTIONS AS RELATED TO π SET UP AT T.S. WHEN $\alpha = 2$

LENGTH FROM T.S. ALONG SPIRAL IN FEET = $100L_s$	D CULMINATING DEGREE OF CURVATURE = αL_s	R CORRESPONDING CIRCULAR ARC RADIUS IN FEET = $5729.58 \div D$	"O" RADIAL OFFSET IN FEET = $.0727 \alpha L_s^3$	t IN FEET = $50L_s - .000127 \alpha^2 L_s^5$	Δ_s DEVIATION ANGLE = $\frac{1}{2} \alpha L_s^2$	θ DEFLECTION FROM T.S. ONLY TO POINT ON SPIRAL = $\frac{1}{3} \Delta_s$	ϕ DEFLECTION FROM POINT ON SPIRAL TO T.S. ONLY = $\frac{2}{3} \Delta_s$	γ IN FEET = $\frac{C \sin \theta}{\sin \Delta_s}$	U IN FEET = $\frac{C \sin \phi}{\sin \Delta_s}$	C LONG CHORD IN FEET = $100L_s - .00034 \alpha^2 L_s^5$	X IN FEET = $C \cos \theta$	Y IN FEET = $C \sin \theta$		
0	0°00'	INFINITY	0.00	0.00	0°00'	0°00'00"	0°00'00"	0.00	0.00	0.00	0.00	0.00		
25	0°30'	11,459.16	—	12.50	0°03'45"	0°01'15"	0°02'30"	8.33	16.67	25.00	25.00	.01		
50	1°00'	5,729.58	.02	25.00	0°15'	0°05'	0°10'	16.67	33.33	50.00	50.00	.07		
75	1°30'	3,819.72	.06	37.50	0°33'45"	0°11'15"	0°22'30"	25.00	50.00	75.00	75.00	.25		
100	2°00'	2,864.79	.15	50.00	1°00'	0°20'	0°40'	33.33	66.67	100.00	100.00	.58		
125	2°30'	2,291.83	.28	62.50	1°33'45"	0°31'15"	1°02'30"	41.67	83.33	125.00	124.99	1.13		
150	3°00'	1,909.86	.49	75.00	2°15'	0°45'	1°30'	50.01	100.01	149.99	149.98	1.96		
175	3°30'	1,637.02	.78	87.49	3°03'45"	1°01'15"	2°02'30"	58.35	116.68	174.98	174.95	3.12		
200	4°00'	1,432.40	1.16	99.98	4°00'	1°20'	2°40'	66.70	133.37	199.96	199.91	4.65		
225	4°30'	1,273.24	1.66	112.47	5°03'45"	1°41'15"	3°22'30"	75.07	150.07	224.92	224.82	6.62		
250	5°00'	1,145.92	2.27	124.95	6°15'	2°05'	4°10'	83.44	166.76	249.87	249.70	9.08		
275	5°30'	1,041.74	3.02	137.42	7°33'45"	2°31'15"	5°02'30"	91.84	183.49	274.79	274.52	12.09		
300	6°00'	954.93	3.93	149.88	9°00'	3°00'	6°00'	100.26	200.24	299.67	299.26	15.68		
325	6°30'	881.47	4.99	162.32	10°33'45"	3°31'15"	7°02'30"	108.72	217.70	324.51	323.90	19.93		
350	7°00'	818.51	6.23	174.73	12°15'	4°05'	8°10'	117.22	233.84	349.28	348.39	24.87		
375	7°30'	763.94	7.67	187.12	14°03'45"	4°41'15"	9°22'30"	125.78	250.73	373.99	372.74	30.56		

FORMULA FOR COMPUTING DEFLECTION ANGLES α AND λ AHEAD AND BACK TO OTHER POINTS ON SPIRAL WHEN π SET UP IS AT A POINT ON SPIRAL.

α AND λ ANGLES ARE COMPUTED IN DEGREES AND DECIMAL PARTS

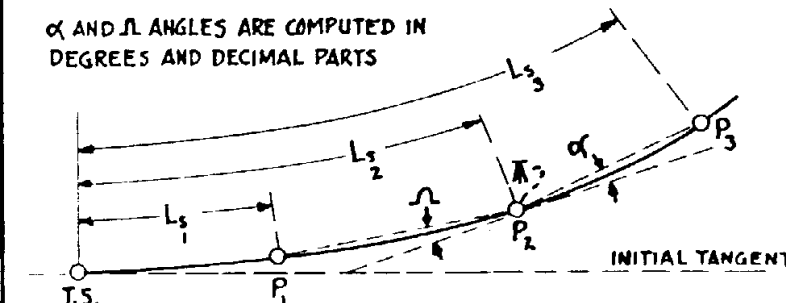

$$\alpha = \frac{1}{2} \alpha L_s \left(\frac{L_s - L_2}{L_3 - L_2} \right) + \frac{1}{6} \alpha \left(\frac{L_s - L_2}{L_3 - L_2} \right)^2$$

$$\lambda = \frac{1}{2} \alpha L_s \left(\frac{L_s - L_1}{L_2 - L_1} \right) - \frac{1}{6} \alpha \left(\frac{L_s - L_1}{L_2 - L_1} \right)^2$$

NOTE:
 FOR ADDITIONAL DATA AND FORMULAE RELATED TO THE USE OF TRANSITION SPIRALS REFER TO STANDARD DRAWINGS NO. D 3-1 & D 3-2. FOR SUPERELEVATION REFER TO D 2-1 & D 2-2.

ARIZONA STATE HIGHWAY DEPARTMENT
 PLANS DIVISION

TRANSITION SPIRAL TABLE FOR
 $\alpha = 2$

RECOMMENDED FOR 55 M.P.H. DESIGN SPEED

CALCULATED AND DRAWN APRIL 1941
 BY LESLIE McDUGALL - HIGHWAY DESIGNER

TRACED BY L.M.C.D.

CHECKED BY

APPROVED BY


ENGINEER OF PLANS

STANDARD DRWG. NO.

D 3-9

REV.

α = RATE OF INCREASE IN DEGREES OF CURVATURE PER 100 FEET ON SPIRAL. (A CONSTANT)
 $100L_s$ = CUMULATED LENGTH IN FEET ON SPIRAL BEGINNING AT POINT "T.S." (L_s = FEET \div 100)
 $D = \alpha L_s$ = CULMINATING DEGREE OF CURVATURE ON SPIRAL. (COMPUTED IN DEGREES AND DECIMAL PARTS)
 (COINCIDES WITH "D" OF CIRCULAR ARC AT POINT "S.C.")

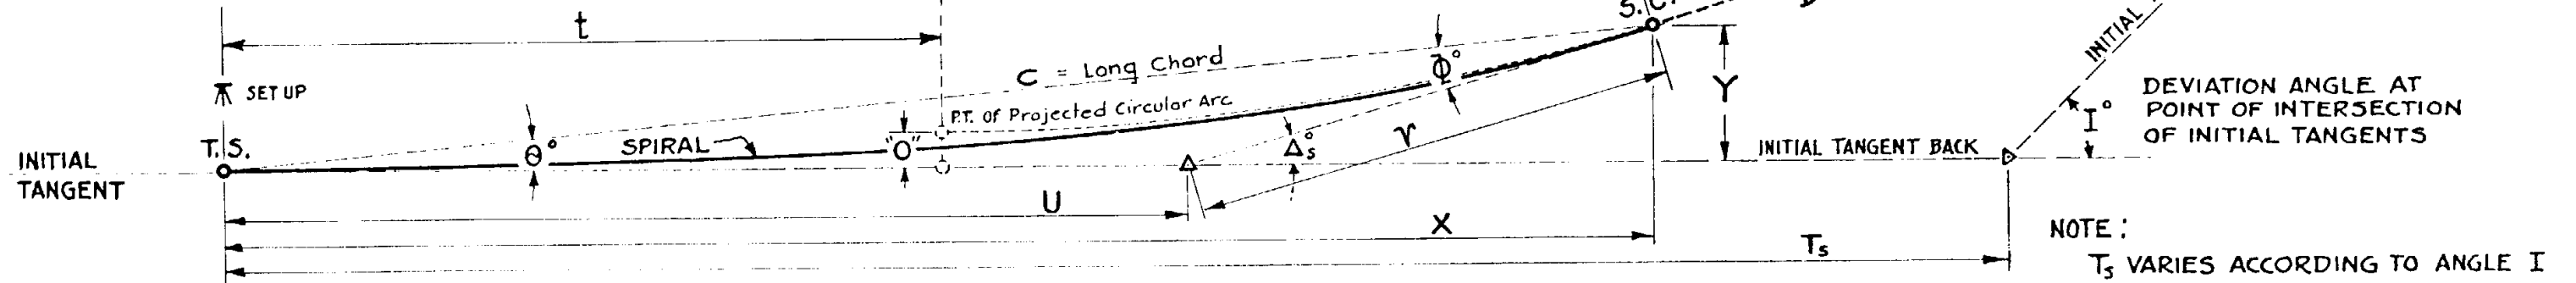


TABULATION OF SPIRAL FUNCTIONS AS RELATED TO π SET UP AT T.S. WHEN $\alpha = 2\frac{1}{2}$

LENGTH FROM T.S. IN FEET = $100L_s$	D CULMINATING DEGREE OF CURVATURE = αL_s	R CORRESPONDING CIRCULAR ARC RADIUS IN FEET = $5729.58 \div D$	"O" RADIAL OFF SET IN FEET = $.0727 \alpha L_s^3$	t IN FEET = $50L_s - .000127 \alpha^2 L_s^5$	Δ_s DEVIATION ANGLE = $\frac{1}{2} \alpha L_s^2$	θ DEFLECTION FROM T.S. ONLY TO POINT ON SPIRAL = $\frac{1}{3} \Delta_s$	ϕ DEFLECTION FROM POINT ON SPIRAL TO T.S. ONLY = $\frac{2}{3} \Delta_s$	γ IN FEET = $\frac{C \sin \theta}{\sin \Delta_s}$	U IN FEET = $\frac{C \sin \phi}{\sin \Delta_s}$	C LONG CHORD IN FEET = $100L_s - .00034 \alpha^2 L_s^5$	X IN FEET = $C \cos \theta$	Y IN FEET = $C \sin \theta$
0	0°00'	INFINITY	0.00	0.00	0°00'00"	0°00'00"	0°00'00"	0.00	0.00	0.00	0.00	0.00
10	0°15'	22,918.32	-	5.00	0°00'45"	0°00'15"	0°00'30"	3.33	6.67	10.00	10.00	-
20	0°30'	11,459.16	-	10.00	0°03'	0°01'	0°02'	6.67	13.33	20.00	20.00	.01
30	0°45'	7,639.44	-	15.00	0°06'45"	0°02'15"	0°04'30"	10.00	20.00	30.00	30.00	.02
40	1°00'	5,729.58	.01	20.00	0°12'	0°04'	0°08'	13.33	26.67	40.00	40.00	.05
50	1°15'	4,583.66	.02	25.00	0°18'45"	0°06'15"	0°12'30"	16.67	33.33	50.00	50.00	.09
60	1°30'	3,819.72	.04	30.00	0°27'	0°09'	0°18'	20.00	40.00	60.00	60.00	.16
70	1°45'	3,274.05	.06	35.00	0°36'45"	0°12'15"	0°24'30"	23.33	46.67	70.00	70.00	.25
80	2°00'	2,864.79	.09	40.00	0°48'	0°16'	0°32'	26.67	53.33	80.00	80.00	.37
90	2°15'	2,546.48	.13	45.00	1°00'45"	0°20'15"	0°40'30"	30.00	60.00	90.00	90.00	.53
100	2°30'	2,291.83	.18	50.00	1°15'	0°25'	0°50'	33.33	66.67	100.00	100.00	.73
110	2°45'	2,083.48	.24	55.00	1°30'45"	0°30'15"	1°00'30"	36.67	73.33	110.00	109.99	.97
120	3°00'	1,909.86	.31	60.00	1°48'	0°36'	1°12'	40.00	80.00	119.99	119.98	1.26
130	3°15'	1,762.95	.40	65.00	2°06'45"	0°42'15"	1°24'30"	43.33	86.67	129.99	129.98	1.60
140	3°30'	1,637.02	.50	70.00	2°27'	0°49'	1°38'	46.67	93.33	139.99	139.98	2.00
150	3°45'	1,587.89	.61	74.99	2°48'45"	0°56'15"	1°52'30"	50.01	100.00	149.98	149.96	2.45
160	4°00'	1,432.40	.74	79.99	3°12'	1°04'	2°08'	53.36	106.70	159.98	159.95	2.98
170	4°15'	1,348.14	.89	84.98	3°36'45"	1°12'15"	2°24'30"	56.68	113.37	169.97	169.92	3.57
180	4°30'	1,273.24	1.06	89.98	4°03'	1°21'	2°42'	60.03	120.03	179.96	179.91	4.24
190	4°45'	1,206.23	1.25	94.98	4°30'45"	1°30'15"	3°00'30"	63.38	126.71	189.95	189.88	4.99
200	5°00'	1,145.92	1.45	99.97	5°00'	1°40'	3°20'	66.70	133.36	199.93	199.85	5.81
210	5°15'	1,091.35	1.68	104.97	5°30'45"	1°50'15"	3°40'30"	70.06	140.05	209.91	209.80	6.73
220	5°30'	1,041.74	1.93	109.96	6°03'	2°01'	4°02'	73.41	146.75	219.89	219.75	7.74
230	5°45'	996.45	2.21	114.95	6°36'45"	2°12'15"	4°24'30"	76.77	153.43	229.86	229.69	8.84
240	6°00'	954.93	2.51	119.94	7°12'	2°24'	4°48'	80.14	160.13	239.83	239.62	10.04
250	6°15'	916.73	2.84	124.92	7°48'45"	2°36'15"	5°12'30"	83.49	166.81	249.79	249.53	11.35
260	6°30'	881.47	3.19	129.91	8°27'	2°49'	5°38'	86.86	173.52	259.75	259.44	12.76
270	6°45'	848.83	3.57	134.89	9°06'45"	3°02'15"	6°04'30"	90.24	180.22	269.70	269.32	14.29
280	7°00'	818.51	3.99	139.86	9°48'	3°16'	6°24'	93.61	186.92	279.63	279.18	15.93
290	7°15'	790.29	4.43	144.84	10°30'45"	3°30'15"	7°00'30"	97.01	193.65	289.56	289.02	17.70
300	7°30'	763.94	4.91	149.81	11°15'	3°45'	7°30'	100.39	200.37	299.48	298.84	19.59
310	7°45'	739.30	5.41	154.77	12°00'45"	4°00'15"	8°00'30"	103.81	207.10	309.39	308.63	21.60
320	8°00'	716.20	5.96	159.73	12°48'	4°16'	8°32'	107.22	213.84	319.29	318.41	23.75
330	8°15'	694.37	6.53	164.69	13°36'45"	4°32'15"	9°04'30"	110.65	220.60	329.17	328.14	26.04
340	8°30'	674.07	7.14	169.64	14°27'	4°49'	9°38'	114.08	227.35	339.03	337.83	28.47
350	8°45'	654.18	7.79	174.58	15°18'45"	5°06'15"	10°12'30"	117.53	234.13	348.88	347.50	31.04
360	9°00'	636.62	8.48	179.52	16°12'	5°24'	10°48'	121.00	240.93	358.72	357.13	33.76

FORMULA FOR COMPUTING DEFLECTION ANGLES α AND λ AHEAD AND BACK TO OTHER POINTS ON SPIRAL WHEN π SET UP IS AT A POINT ON SPIRAL.

α AND λ ANGLES ARE COMPUTED IN DEGREES AND DECIMAL PARTS

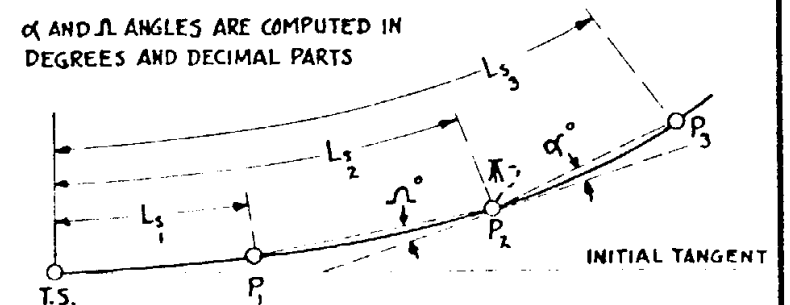

$$\alpha^\circ = \frac{1}{2} \alpha L_2 \left(\frac{L_3 - L_2}{L_2} \right) + \frac{1}{6} \alpha \left(\frac{L_3 - L_2}{L_2} \right)^2$$

$$\lambda^\circ = \frac{1}{2} \alpha L_2 \left(\frac{L_2 - L_1}{L_2} \right) - \frac{1}{6} \alpha \left(\frac{L_2 - L_1}{L_2} \right)^2$$

NOTE:

FOR ADDITIONAL DATA AND FORMULAE RELATED TO THE USE OF TRANSITION SPIRALS REFER TO STANDARD DRAWINGS NO. D 3-1 & D 3-2 FOR SUPERELEVATION REFER TO D 2-1 & D 2-2.

ARIZONA STATE HIGHWAY DEPARTMENT
PLANS DIVISION

TRANSITION SPIRAL TABLE FOR
 $\alpha = 2\frac{1}{2}$

RECOMMENDED FOR 50 M.P.H. DESIGN SPEED

CALCULATED AND DRAWN APRIL 1941
BY LESLIE McDUGALL - HIGHWAY DESIGNER

TRACED BY L.M.D.

CHECKED BY

APPROVED BY


ENGINEER OF PLANS

STANDARD DRWG. NO.

D 3-10

REV.

α = RATE OF INCREASE IN DEGREES OF CURVATURE PER 100 FEET ON SPIRAL. (A CONSTANT)
 $100L_s$ = CUMULATED LENGTH IN FEET ON SPIRAL BEGINNING AT POINT "T.S." (L_s = FEET \div 100)
 $D = \alpha L_s$ = CULMINATING DEGREE OF CURVATURE ON SPIRAL. (COMPUTED IN DEGREES AND DECIMAL PARTS)
 (COINCIDES WITH "D" OF CIRCULAR ARC AT POINT "S.C.")

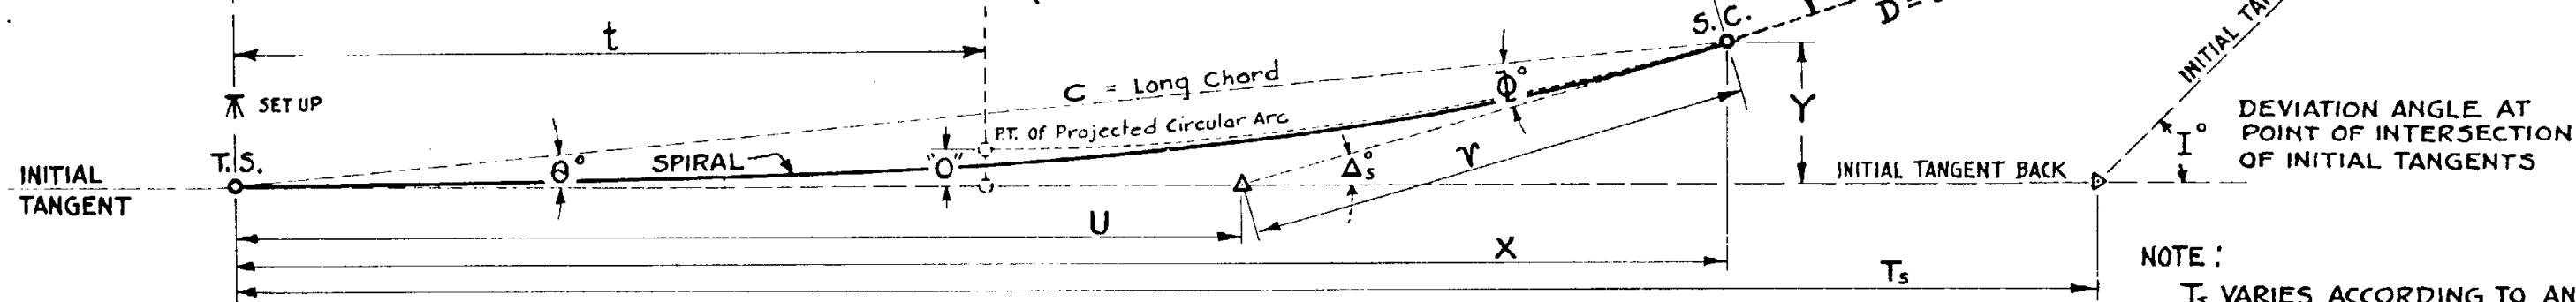

NOTE:
 T_s VARIES ACCORDING TO ANGLE I


$$T_s = \left[\left(\tan \frac{1}{2} I \right) (R + 0'') \right] + t$$

TABULATION OF SPIRAL FUNCTIONS AS RELATED TO π SET UP AT T.S. WHEN $\alpha = 3 \frac{1}{3}$

LENGTH FROM T.S. ALONG SPIRAL IN FEET = $100L_s$	D CULMINATING DEGREE OF CURVATURE = αL_s	R CORRESPONDING CIRCULAR ARC RADIUS IN FEET = $5729.58 \div D$	"O" RADIAL OFFSET IN FEET = $.0727 \alpha L_s^3$	t IN FEET = $50L_s - .000127 \alpha^2 L_s^3$	Δ_s DEVIATION ANGLE = $\frac{1}{2} \alpha L_s^2$	θ_s DEFLECTION FROM T.S. ONLY TO POINT ON SPIRAL = $\frac{1}{3} \Delta_s$	ϕ_s DEFLECTION FROM POINT ON SPIRAL TO T.S. ONLY = $\frac{2}{3} \Delta_s$	γ IN FEET = $\frac{C \sin \theta}{\sin \Delta_s}$	U IN FEET = $\frac{C \sin \phi}{\sin \Delta_s}$	C LONG CHORD IN FEET = $100L_s - .00034 \alpha^2 L_s^3$	X IN FEET = $C \cos \theta$	Y IN FEET = $C \sin \theta$
0	0°00'	INFINITY	0.00	0.00	0°00'	0°00'00"	0°00'00"	0.00	0.00	0.00	0.00	0.00
10	0°20'	17,188.74	—	5.00	0°01'	0°00'20"	0°00'40"	3.33	6.67	10.00	10.00	—
20	0°40'	8,594.37	—	10.00	0°04'	0°01'20"	0°02'40"	6.67	13.33	20.00	20.00	.01
30	1°00'	5,729.58	.01	15.00	0°09'	0°03'	0°06'	10.00	20.00	30.00	30.00	.03
40	1°20'	4,297.19	.02	20.00	0°16'	0°05'20"	0°10'40"	13.33	26.67	40.00	40.00	.06
50	1°40'	3,437.75	.03	25.00	0°25'	0°08'20"	0°16'40"	16.67	33.33	50.00	50.00	.12
60	2°00'	2,864.79	.05	30.00	0°36'	0°12'	0°24'	20.00	40.00	60.00	60.00	.21
70	2°20'	2,455.53	.08	35.00	0°49'	0°16'20"	0°32'40"	23.33	46.67	70.00	70.00	.33
80	2°40'	2,148.59	.12	40.00	1°04'	0°21'20"	0°42'40"	26.67	53.33	80.00	80.00	.50
90	3°00'	1,909.86	.18	45.00	1°21'	0°27'	0°54'	30.00	60.00	90.00	90.00	.71
100	3°20'	1,718.87	.24	50.00	1°40'	0°33'20"	1°06'40"	33.33	66.67	100.00	99.99	.97
110	3°40'	1,562.61	.32	55.00	2°01'	0°40'20"	1°20'40"	36.67	73.33	109.99	109.98	1.29
120	4°00'	1,432.40	.42	60.00	2°24'	0°48'	1°36'	40.00	80.00	119.99	119.98	1.68
130	4°20'	1,322.21	.53	64.99	2°49'	0°56'20"	1°52'40"	43.35	86.67	129.99	129.97	2.13
140	4°40'	1,227.77	.67	69.99	3°16'	1°05'20"	2°10'40"	46.69	93.36	139.98	139.95	2.66
150	5°00'	1,145.92	.82	74.99	3°45'	1°15'	2°30'	50.01	100.03	149.97	149.93	3.27
160	5°20'	1,074.30	.99	79.99	4°16'	1°25'20"	2°50'40"	53.36	106.69	159.96	159.91	3.97
170	5°40'	1,011.10	1.19	84.98	4°49'	1°36'20"	3°12'40"	56.70	113.37	169.95	169.88	4.76
180	6°00'	954.93	1.41	89.98	5°24'	1°48'	3°36'	60.05	120.05	179.93	179.84	5.65
190	6°20'	904.67	1.66	94.96	6°01'	2°00'20"	4°00'40"	63.41	126.74	189.91	189.79	6.65
200	6°40'	859.44	1.94	99.95	6°40'	2°13'20"	4°26'40"	66.76	133.43	199.88	199.73	7.75
210	7°00'	818.51	2.24	104.94	7°21'	2°27'	4°54'	70.12	140.12	209.85	209.66	8.97
220	7°20'	781.31	2.58	109.93	8°04'	2°41'20"	5°22'40"	73.49	146.81	219.81	219.57	10.31
230	7°40'	747.34	2.95	114.91	8°49'	2°56'20"	5°52'40"	76.85	153.51	229.76	229.46	11.78
240	8°00'	716.20	3.35	119.89	9°36'	3°12'	6°24'	80.23	160.22	239.70	239.33	13.38
250	8°20'	687.55	3.78	124.86	10°25'	3°28'20"	6°56'40"	83.62	166.91	249.63	249.17	15.12
260	8°40'	661.11	4.25	129.83	11°16'	3°45'20"	7°30'40"	87.01	173.65	259.55	258.99	17.00
270	9°00'	636.62	4.76	134.80	12°09'	4°03'	8°06'	90.43	180.39	269.46	268.79	19.03
280	9°20'	613.88	5.31	139.76	13°04'	4°21'20"	8°42'40"	93.84	187.14	279.35	278.54	21.22
290	9°40'	592.72	5.91	144.71	14°01'	4°40'20"	9°20'40"	97.27	193.89	289.23	288.27	23.56
300	10°00'	572.96	6.54	149.66	15°00'	5°00'	10°00'	100.71	200.66	299.08	297.94	26.07
310	10°20'	554.48	7.21	154.60	16°01'	5°20'20"	10°40'40"	104.17	207.44	308.92	307.58	28.74
320	10°40'	537.15	7.94	159.53	17°04'	5°41'20"	11°22'40"	107.66	214.25	318.73	317.16	31.59
330	11°00'	520.87	8.70	164.45	18°09'	6°03'	12°06'	111.16	221.07	328.52	326.69	34.62
340	11°20'	505.55	9.52	169.36	19°16'	6°25'20"	12°50'40"	114.67	227.91	338.28	336.16	37.84
350	11°40'	491.11	10.39	174.26	20°25'	6°48'20"	13°36'40"	118.22	234.77	348.02	345.57	41.24

FORMULA FOR COMPUTING DEFLECTION ANGLES α AND Δ AHEAD AND BACK TO OTHER POINTS ON SPIRAL WHEN π SET UP IS AT A POINT ON SPIRAL.

α AND Δ ANGLES ARE COMPUTED IN DEGREES AND DECIMAL PARTS

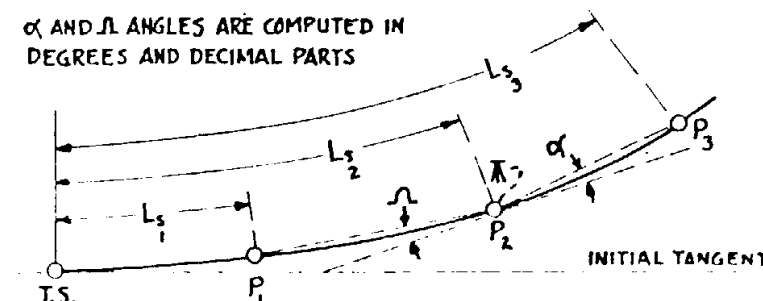

$$\alpha = \frac{1}{2} \alpha L_s (L_s - L_2) + \frac{1}{6} \alpha (L_s - L_2)^2$$

$$\Delta = \frac{1}{2} \alpha L_s (L_s - L_1) - \frac{1}{6} \alpha (L_s - L_1)^2$$

NOTE:
 FOR ADDITIONAL DATA AND FORMULAE RELATED TO THE USE OF TRANSITION SPIRALS REFER TO STANDARD DRAWINGS NO. D 3-1 & D 3-2 FOR SUPERELEVATION REFER TO D 2-1 & D 2-2

ARIZONA STATE HIGHWAY DEPARTMENT
 PLANS DIVISION

TRANSITION SPIRAL TABLE FOR
 $\alpha = 3 \frac{1}{3}$

RECOMMENDED FOR 45 M.P.H. DESIGN SPEED

CALCULATED AND DRAWN APRIL 1941
 BY LESLIE M'DOUGALL - HIGHWAY DESIGNER

TRACED BY L.M.D.

CHECKED BY


APPROVED BY

ENGINEER OF PLANS

STANDARD DRWG. NO.

D 3-11

α = RATE OF INCREASE IN DEGREES OF CURVATURE PER 100 FEET ON SPIRAL. (A CONSTANT)
 $100L_s$ = CUMULATED LENGTH IN FEET ON SPIRAL BEGINNING AT POINT "T.S." (L_s = FEET \div 100)
 $D = \alpha L_s$ = CULMINATING DEGREE OF CURVATURE ON SPIRAL. (COMPUTED IN DEGREES AND DECIMAL PARTS)
 (COINCIDES WITH "D" OF CIRCULAR ARC AT POINT "S.C.")

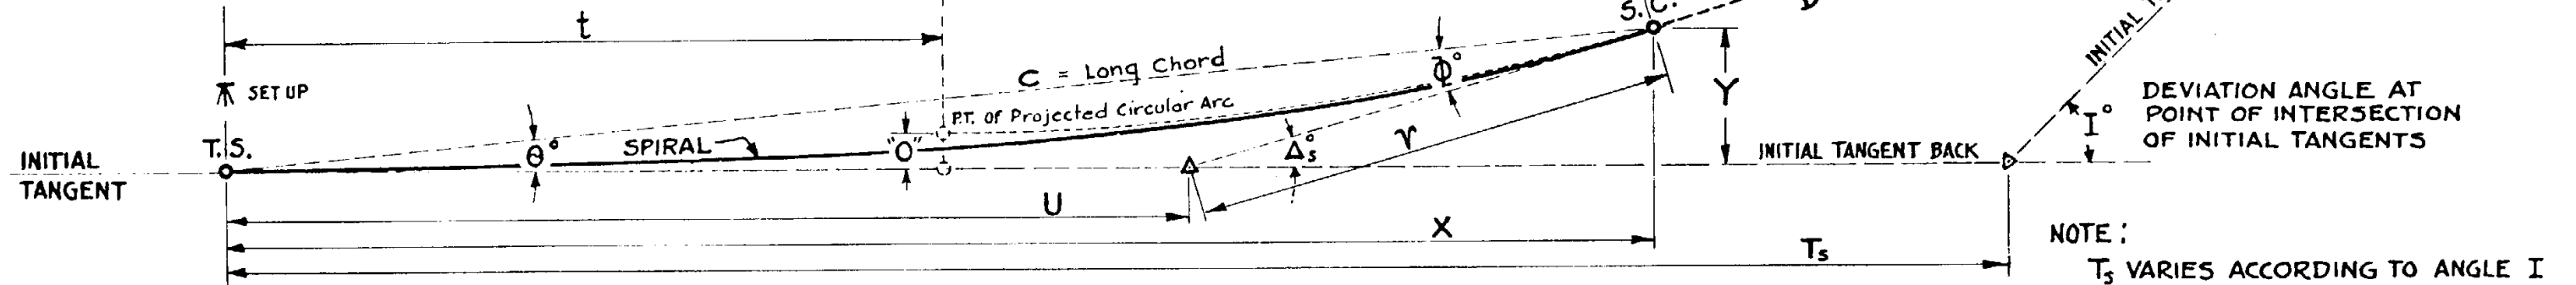


TABULATION OF SPIRAL FUNCTIONS AS RELATED TO π SET UP AT T.S. WHEN $\alpha = 5$

LENGTH FROM T.S. ALONG SPIRAL IN FEET = $100L_s$	D CULMINATING DEGREE OF CURVATURE = αL_s	R CORRESPONDING CIRCULAR ARC RADIUS IN FEET = $5729.58 \div D$	"O" RADIAL OFFSET IN FEET = $.0727 \alpha L_s^3$	t IN FEET = $50L_s - .000127 \alpha^2 L_s^5$	Δ_s DEVIATION ANGLE = $\frac{1}{2} \alpha L_s^2$	θ DEFLECTION FROM T.S. ONLY TO POINT ON SPIRAL = $\frac{1}{3} \Delta_s$	ϕ DEFLECTION FROM POINT ON SPIRAL TO T.S. ONLY = $\frac{2}{3} \Delta_s$	γ IN FEET = $\frac{C \sin \theta}{\sin \Delta_s}$	U IN FEET = $\frac{C \sin \phi}{\sin \Delta_s}$	C LONG CHORD IN FEET = $100L_s - .00034 \alpha^2 L_s^5$	X IN FEET = $C \cos \theta$	Y IN FEET = $C \sin \theta$
0	0°00'	INFINITY	0.00	0.00	0°00'00"	0°00'00"	0°00'00"	0.00	0.00	0.00	0.00	0.00
10	0°30'	11,459.16	-	5.00	0°01'30"	0°00'30"	0°01'00"	3.33	6.67	10.00	10.00	-
20	1°00'	5,729.58	-	10.00	0°06'	0°02'	0°04'	6.67	13.33	20.00	20.00	.01
30	1°30'	3,819.72	.01	15.00	0°13'30"	0°04'30"	0°09'	10.00	20.00	30.00	30.00	.04
40	2°00'	2,864.79	.02	20.00	0°24'	0°08'	0°16'	13.33	26.67	40.00	40.00	.09
50	2°30'	2,291.83	.05	25.00	0°37'30"	0°12'30"	0°25'	16.67	33.33	50.00	50.00	.18
60	3°00'	1,909.86	.08	30.00	0°54'	0°18'	0°36'	20.00	40.00	60.00	60.00	.31
70	3°30'	1,637.02	.12	35.00	1°13'30"	0°24'30"	0°49'	23.33	46.67	70.00	70.00	.50
80	4°00'	1,432.40	.19	40.00	1°36'	0°32'	1°04'	26.67	53.33	80.00	80.00	.74
90	4°30'	1,273.24	.26	45.00	2°01'30"	0°40'30"	1°21'	30.00	60.00	90.00	89.99	1.06
100	5°00'	1,145.92	.36	50.00	2°30'	0°50'	1°40'	33.33	66.67	99.99	99.98	1.45
110	5°30'	1,041.74	.48	54.99	3°01'30"	1°00'30"	2°01'	36.67	73.34	109.99	109.97	1.93
120	6°00'	954.93	.63	59.99	3°36'	1°12'	2°24'	40.01	80.02	119.98	119.95	2.51
130	6°30'	881.47	.80	64.99	4°13'30"	1°24'30"	2°49'	43.35	86.69	129.97	129.93	3.19
140	7°00'	818.51	1.00	69.98	4°54'	1°38'	3°16'	46.70	93.36	139.96	139.90	3.99
150	7°30'	763.94	1.23	74.98	5°37'30"	1°52'30"	3°45'	50.05	100.05	149.94	149.86	4.91
160	8°00'	716.20	1.49	79.97	6°24'	2°08'	4°16'	53.41	106.73	159.91	159.80	5.95
170	8°30'	674.07	1.79	84.95	7°13'30"	2°24'30"	4°49'	56.77	113.42	169.88	169.73	7.14
180	9°00'	636.62	2.12	89.94	8°06'	2°42'	5°24'	60.13	120.12	179.84	179.64	8.47
190	9°30'	603.11	2.49	94.92	9°01'30"	3°00'30"	6°01'	63.50	126.82	189.79	189.53	9.96
200	10°00'	572.96	2.91	99.90	10°00'	3°20'	6°40'	66.87	133.52	199.73	199.39	11.61
210	10°30'	545.67	3.37	104.87	11°01'30"	3°40'30"	7°21'	70.27	140.25	209.65	209.22	13.44
220	11°00'	520.87	3.87	109.84	12°06'	4°02'	8°04'	73.68	146.98	219.56	219.02	15.44
230	11°30'	498.22	4.42	114.80	13°13'30"	4°24'30"	8°49'	77.09	153.72	229.45	228.77	17.64
240	12°00'	477.47	5.02	119.75	14°24'	4°48'	9°36'	80.53	160.49	239.32	238.48	20.03
250	12°30'	458.37	5.68	124.69	15°37'30"	5°12'30"	10°25'	83.98	167.27	249.17	248.14	22.62
260	13°00'	440.74	6.39	129.62	16°54'	5°38'	11°16'	87.45	174.07	258.99	257.74	25.42
270	13°30'	424.41	7.15	134.54	18°13'30"	6°04'30"	12°09'	90.95	180.88	268.78	267.27	28.45
280	14°00'	409.26	7.98	139.45	19°36'	6°32'	13°04'	94.48	187.72	278.54	276.73	31.69
290	14°30'	395.14	8.87	144.35	21°01'30"	7°00'30"	14°01'	98.03	194.60	288.26	286.11	35.17
300	15°00'	381.97	9.81	149.23	22°30'	7°30'	15°00'	101.62	201.50	297.93	295.38	38.89

FORMULA FOR COMPUTING DEFLECTION ANGLES α AND λ AHEAD AND BACK TO OTHER POINTS ON SPIRAL WHEN π SET UP IS AT A POINT ON SPIRAL.

α AND λ ANGLES ARE COMPUTED IN DEGREES AND DECIMAL PARTS

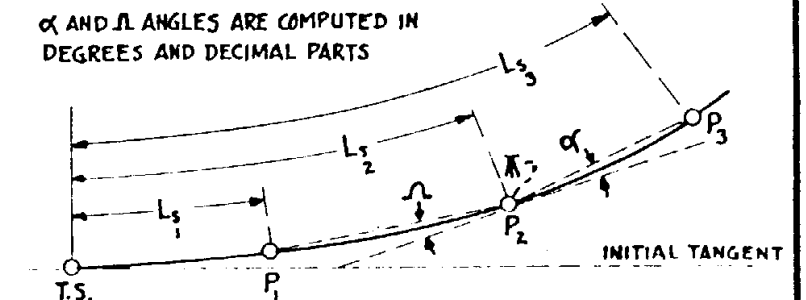

$$\alpha = \frac{1}{2} \alpha L_2 (L_3 - L_2) + \frac{1}{6} \alpha (L_3 - L_2)^2$$

$$\lambda = \frac{1}{2} \alpha L_2 (L_2 - L_1) - \frac{1}{6} \alpha (L_2 - L_1)^2$$

NOTE:

FOR ADDITIONAL DATA AND FORMULAE RELATED TO THE USE OF TRANSITION SPIRALS REFER TO STANDARD DRAWINGS NO. D 3-1 & D 3-2. FOR SUPERELEVATION, REFER TO D 2-1 & D 2-2.

ARIZONA STATE HIGHWAY DEPARTMENT
PLANS DIVISION

TRANSITION SPIRAL TABLE FOR
 $\alpha = 5$

RECOMMENDED FOR 40 M.P.H. DESIGN SPEED

CALCULATED AND DRAWN APRIL 1941
BY LESLIE M'DOUGALL - HIGHWAY DESIGNER

TRACED BY L.M.D.

CHECKED BY


APPROVED BY
ENGINEER OF PLANS

STANDARD DRWG. NO.

D 3-12

REV.

α = RATE OF INCREASE IN DEGREES OF CURVATURE PER 100 FEET ON SPIRAL. (A CONSTANT)
 $100L_s$ = CUMULATED LENGTH IN FEET ON SPIRAL BEGINNING AT POINT "T.S.". (L_s - FEET \div 100)
 $D = \alpha L_s$ = CULMINATING DEGREE OF CURVATURE ON SPIRAL. (COMPUTED IN DEGREES AND DECIMAL PARTS)
 (COINCIDES WITH "D" OF CIRCULAR ARC AT POINT "S.C.")

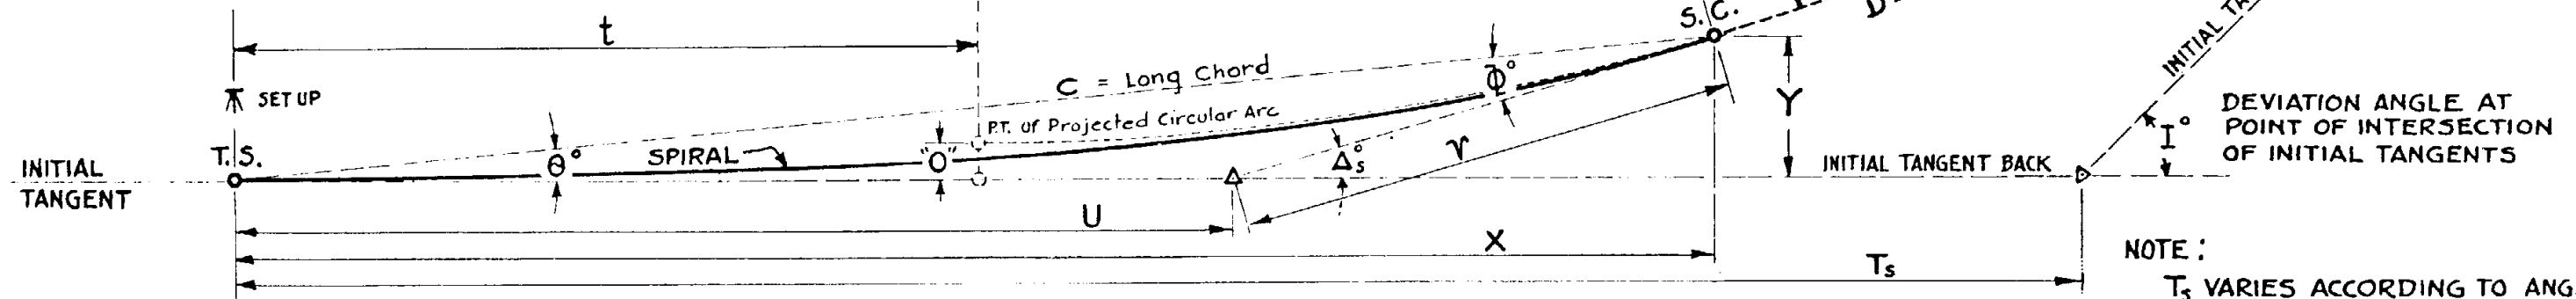


TABULATION OF SPIRAL FUNCTIONS AS RELATED TO π SET UP AT T.S. WHEN $\alpha = 10$

LENGTH FROM T.S. ALONG SPIRAL IN FEET = $100L_s$	D CULMINATING DEGREE OF CURVATURE = αL_s	R CORRESPONDING CIRCULAR ARC RADIUS IN FEET = $5729.58 \div D$	"O" RADIAL OFF SET IN FEET = $.0727 \alpha L_s^3$	t IN FEET = $50L_s - .000127 \alpha^2 L_s^5$	Δ_s DEVIATION ANGLE = $\frac{1}{2} \alpha L_s^2$	θ DEFLECTION FROM T.S. ONLY TO POINT ON SPIRAL = $\frac{1}{3} \Delta_s$	ϕ DEFLECTION FROM POINT ON SPIRAL TO T.S. ONLY = $\frac{2}{3} \Delta_s$	γ IN FEET = $\frac{C \sin \theta}{\sin \Delta_s}$	U IN FEET = $\frac{C \sin \phi}{\sin \Delta_s}$	C LONG CHORD IN FEET = $100L_s - .00034 \alpha^2 L_s^5$	X IN FEET = $C \cos \theta$	Y IN FEET = $C \sin \theta$
0	0°00'	INFINITY	0.00	0.00	0°00'	0°00'	0°00'	0.00	0.00	0.00	0.00	0.00
10	1°00'	5,729.58	--	5.00	0°03'	0°01'	0°02'	3.33	6.67	10.00	10.00	--
20	2°00'	2,864.79	.01	10.00	0°12'	0°04'	0°08'	6.67	13.33	20.00	20.00	.02
30	3°00'	1,909.86	.02	15.00	0°27'	0°09'	0°18'	10.00	20.00	30.00	30.00	.08
40	4°00'	1,432.40	.05	20.00	0°48'	0°16'	0°32'	13.33	26.67	40.00	40.00	.19
50	5°00'	1,145.92	.09	25.00	1°15'	0°25'	0°50'	16.67	33.33	50.00	50.00	.36
60	6°00'	954.93	.16	30.00	1°48'	0°36'	1°12'	20.00	40.00	60.00	60.00	.63
70	7°00'	818.51	.25	35.00	2°27'	0°49'	1°38'	23.33	46.67	69.99	69.98	1.00
80	8°00'	716.20	.37	40.00	3°12'	1°04'	2°08'	26.68	53.35	79.99	79.98	1.49
90	9°00'	636.62	.53	45.00	4°03'	1°21'	2°42'	30.01	60.02	89.98	89.96	2.12
100	10°00'	572.96	.73	49.99	5°00'	1°40'	3°20'	33.36	66.69	99.97	99.93	2.91
110	11°00'	520.87	.97	54.98	6°03'	2°01'	4°02'	36.71	73.38	109.95	109.88	3.87
120	12°00'	477.47	1.26	59.97	7°12'	2°24'	4°48'	40.07	80.07	119.92	119.81	5.02
130	13°00'	440.74	1.60	64.95	8°27'	2°49'	5°38'	43.43	86.75	129.87	129.71	6.38
140	14°00'	409.26	1.99	69.93	9°48'	3°16'	6°32'	46.81	93.47	139.82	139.59	7.96
150	15°00'	381.97	2.45	74.90	11°15'	3°45'	7°30'	50.20	100.19	149.75	149.43	9.79
160	16°00'	358.10	2.97	79.87	12°48'	4°16'	8°32'	53.61	106.92	159.64	159.20	11.88
170	17°00'	337.03	3.56	84.82	14°27'	4°49'	9°38'	57.04	113.68	169.52	168.92	14.23
180	18°00'	318.31	4.24	89.76	16°12'	5°24'	10°48'	60.50	120.46	179.36	178.56	16.88
190	19°00'	301.56	4.99	94.68	18°03'	6°01'	12°02'	63.99	127.27	189.16	188.12	19.83
200	20°00'	286.48	5.82	99.59	20°00'	6°40'	13°20'	67.52	134.13	198.92	197.57	23.09
210	21°00'	272.84	6.73	104.48	22°03'	7°21'	14°42'	71.09	141.01	208.61	206.90	26.69
220	22°00'	260.44	7.74	109.35	24°12'	8°04'	16°08'	74.71	147.94	218.25	216.09	30.63
230	23°00'	249.11	8.84	114.18	26°27'	8°49'	17°38'	78.39	154.93	227.81	225.12	34.92
240	24°00'	238.73	10.05	118.99	28°48'	9°36'	19°12'	82.14	161.99	237.29	233.97	39.57
250	25°00'	229.18	11.35	123.76	31°15'	10°25'	20°50'	85.98	169.11	246.68	242.61	44.60
260	26°00'	220.37	12.78	128.49	33°48'	11°16'	22°32'	89.90	176.32	255.96	251.03	50.01
270	27°00'	212.21	14.31	133.18	36°27'	12°09'	24°18'	93.92	183.63	265.12	259.18	55.80
280	28°00'	204.63	15.96	137.81	39°12'	13°04'	26°08'	98.21	191.05	274.15	267.05	62.07

FORMULA FOR COMPUTING DEFLECTION ANGLES α AND Δ AHEAD AND BACK TO OTHER POINTS ON SPIRAL WHEN π SET UP IS AT A POINT ON SPIRAL.

α AND Δ ANGLES ARE COMPUTED IN DEGREES AND DECIMAL PARTS

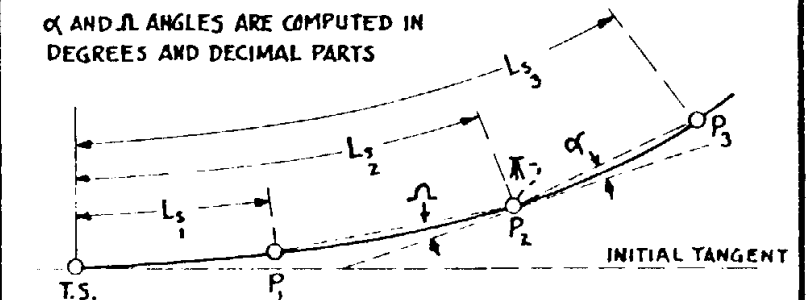

$$\alpha = \frac{1}{2} \alpha L_s (L_s - L_2) + \frac{1}{6} \alpha (L_s - L_2)^2$$

$$\Delta = \frac{1}{2} \alpha L_s (L_s - L_1) - \frac{1}{6} \alpha (L_s - L_1)^2$$

NOTE:

FOR ADDITIONAL DATA AND FORMULAE RELATED TO THE USE OF TRANSITION SPIRALS REFER TO STANDARD DRAWINGS NO. D 3-1 & D 3-2. FOR SUPERELEVATION, REFER TO D 2-1 & D 2-2.

ARIZONA STATE HIGHWAY DEPARTMENT
PLANS DIVISION

TRANSITION SPIRAL TABLE FOR
 $\alpha = 10$

RECOMMENDED FOR 30
35 M.P.H. DESIGN SPEED

CALCULATED AND DRAWN APRIL 1941
BY LESLIE M'DOUGALL - HIGHWAY DESIGNER

TRACED BY L.M.D.

CHECKED BY


APPROVED BY

ENGINEER OF PLANS

STANDARD DRWG. NO.

D 3-13

REV.

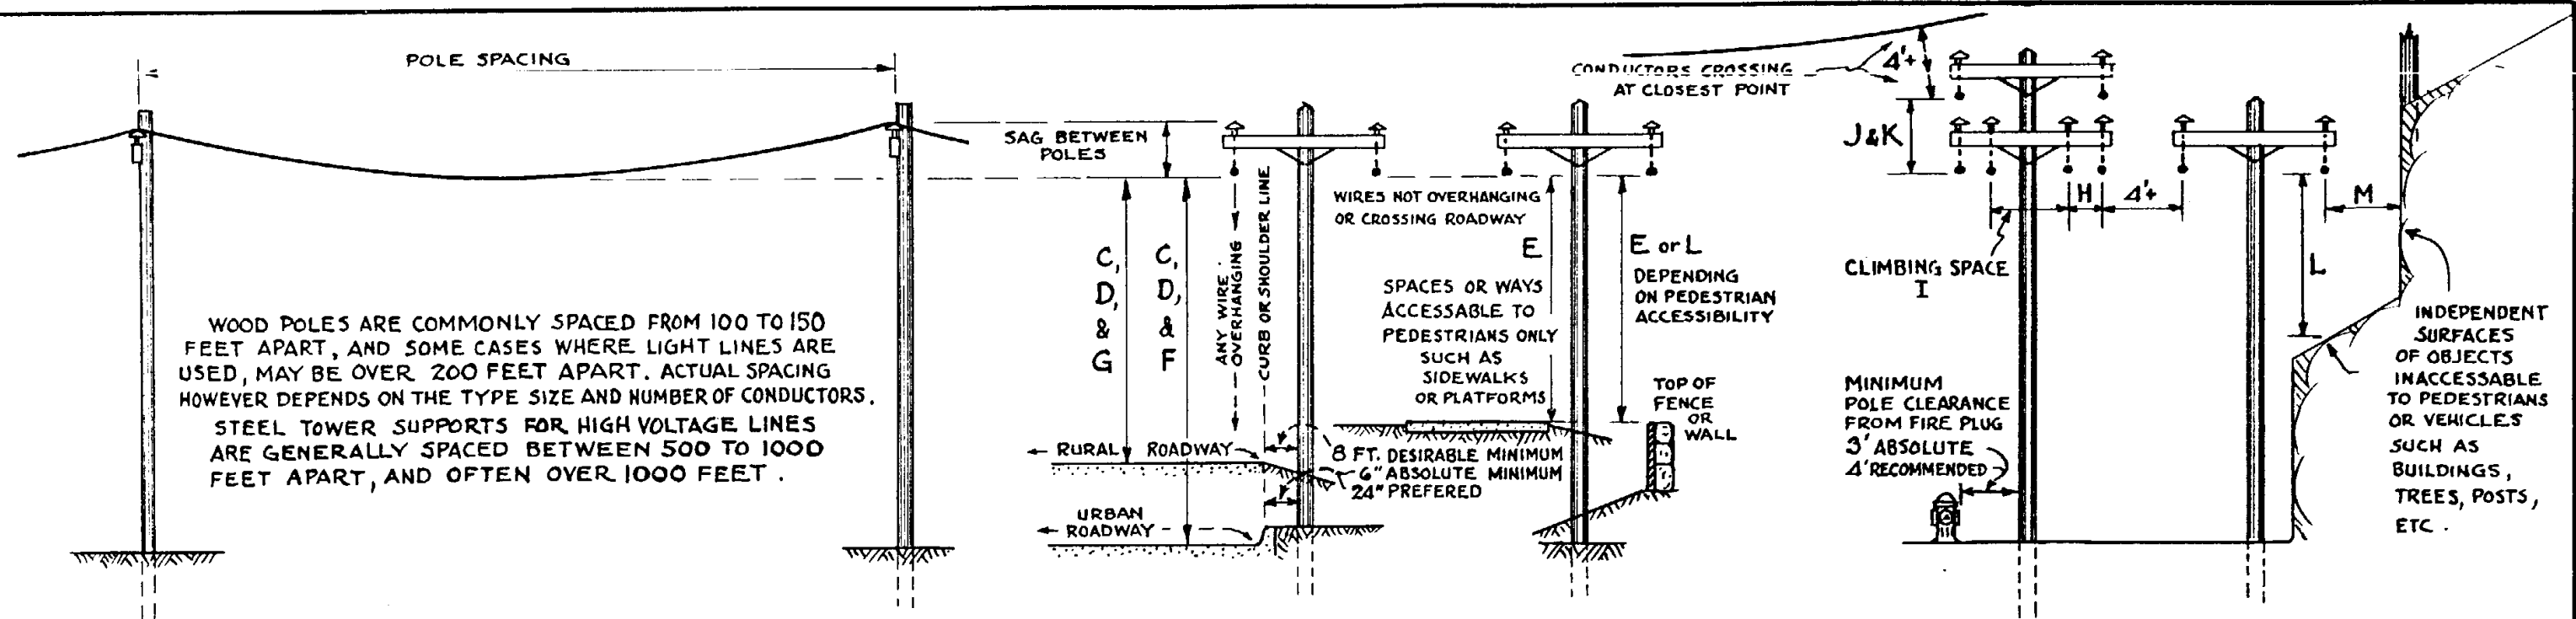

MINIMUM VERTICAL CLEARANCES

WHERE WIRES CROSS OVER					WHERE WIRES RUN ALONG		
TRACK RAILS OF RAILROADS HANDLING FREIGHT CARS ON TOP OF WHICH MEN ARE PERMITTED	TRACK RAILS OF RAILROADS NOT INCLUDED ABOVE	STREETS, ALLEYS, OR ROADS URBAN OR RURAL	DRIVEWAYS TO RESIDENCE GARAGES	SPACES OR WAYS ACCESSIBLE TO PEDESTRIANS ONLY	STREETS OR ALLEYS IN URBAN DISTRICTS	ROADS IN RURAL DISTRICTS	
A	B	C	D	E	F	G	
FEET	FEET	FEET	FEET	FEET	FEET	FEET	FEET
27	18	18	10	15	18	15	
OPEN SUPPLY LINE WIRES, ARC WIRES AND SERVICE DROPS	0 TO 750 VOLTS	27	18	18	10	15	18
	750 TO 15,000 VOLTS	28	20	20	20	15	20
	15,000 TO 50,000 VOLTS	30	22	22	22	17	22
TROLLEY CONTACT CONDUCTORS AND ASSOCIATED SPAN OR MESSENGER WIRES	0 TO 750 VOLTS TO GROUND	22	18	18	18	16	18
	OVER 750 VOLTS TO GROUND	22	20	20	20	18	20

OTHER MINIMUM CLEARANCES FOR CONDUCTORS

PARALLEL CONDUCTORS ON SAME CROSS ARM	CLIMBING SPACE AT POLE (BETWEEN WIRES)	VERTICAL SEPARATION OF CROSS ARMS - SAME UTILITY	VERTICAL SEPARATION OF CROSS ARMS - DIFFERENT UTILITY	VERTICAL CLEARANCE FROM BUILDINGS AND OTHER OBJECTS INACCESSIBLE TO PEDESTRIANS	HORIZONTAL CLEARANCE FROM BUILDINGS AND OTHER OBJECTS INACCESSIBLE TO PEDESTRIANS
H	I	J	K	L	M
INCHES	INCHES	FEET	FEET	FEET	FEET
6	24	2	4	-	-
12	30	2	4	8	3
12 TO 15	36	4	6	8	8
15 TO 29	36+	4	6	10	10

NOTE: 12 INCH MINIMUM SPACE EXTENDS UP TO 7,500 VOLTS. FOR EACH 1000 VOLTS IN EXCESS OF 7,500 VOLTS 0.4 INCH IS ADDED TO THE 12 INCH MINIMUM.

DEPTH OF POLE SETTINGS IN FEET

POLE HEIGHT	DEPTH IN SOFT GROUND		DEPTH IN SOLID GROUND		DEPTH IN SOLID ROCK
	STRAIGHT LINE	CORNERS	STRAIGHT LINE	CORNERS	
20	5	5	5	5	3
25	5½	6	5	5½	3½
30	6	6½	5½	6	3½
35	6½	7	6	6½	4
40	7	7½	6½	7	4
45	7	7½	6½	7	4½
50	7½	8	7	7½	4½
55	8	8½	7½	8	5
60	8½	9	8	8½	5½
65	9	9½	8½	9	6

NOTE:

BEFORE SELECTING LOCATION FOR NEW OR RECONSTRUCTED UTILITY POLE LINES ON HIGHWAY RIGHT OF WAY A COOPERATIVE ENGINEERING STUDY IS ADVISABLE. PARTICULAR ATTENTION SHOULD BE GIVEN TO SUCH ITEMS AS THE FUTURE PROBABILITY & POSSIBILITY OF WIDENING THE ROADWAY; CHANGES IN ALIGNMENT AND GRADES; ROADSIDE IMPROVEMENTS AND DEVELOPMENTS, INCLUDING THE LOCATION OF WALKWAYS, PIPE LINES, DITCHES, PLANT LIFE, FENCE LINES, BUILDING SET-BACK LINES, AND EXPANSION OF RIGHT-OF-WAY WIDTH.



UTILITIES IN PLANNING NEW POLE LINES ARE URGED TO AVOID MINIMUM REQUIREMENTS WHEREVER POSSIBLE IN FAVOR OF MORE GENEROUS CLEARANCES AND PROTECTIVE MEASURES, IN THE INTEREST OF GREATER PUBLIC SAFETY AND CONVENIENCE, AND PROBABLY BETTER OPERATING AND MAINTENANCE CONDITIONS.

NOTE: THE MINIMUM VERTICAL CLEARANCES TABULATED ABOVE ARE FOR POLE SPACING OF 150 FEET OR LESS. ADD 0.1 FT. TO TABULATED FIGURE FOR EACH 10 FEET IN EXCESS OF 150 FT. POLE SPACING.

GENERAL

THE DATA PRESENTED ON THIS DRAWING IS BASED ON "SAFETY RULES FOR THE INSTALLATION AND MAINTENANCE OF ELECTRICAL SUPPLY AND COMMUNICATION LINES", DEPARTMENT OF COMMERCE BUREAU OF STANDARDS HANDBOOK NO. 10 (APRIL 1927) APPROVED BY THE ARIZONA STATE INDUSTRIAL COMMISSION. THIS DRAWING DOES NOT ATTEMPT TO SHOW COMPLETE DATA AND DETAILS AS CONTAINED IN THE BUREAU OF STANDARDS HANDBOOK, BUT RATHER IS INTENDED TO SHOW SUCH EXTRACTS FROM THE HANDBOOK, AND DATA FROM OTHER SOURCES, WHICH ARE DEEMED TO BE OF FUNDAMENTAL IMPORTANCE, AND WHICH MAY INFLUENCE THE DESIGN OF HIGHWAYS AND RELATED APPURTENANCES.

ARIZONA STATE HIGHWAY DEPARTMENT PLANS DIVISION		REV.
MINIMUM CLEARANCES FOR UTILITY POLE LINES AS RELATED TO HIGHWAYS		
DRAWN AND TRACED BY LESLIE McDUGALL - HIGHWAY DESIGNER	MAY, 1941	STANDARD DRWG. NO.
CHECKED		
APPROVED BY ENGINEER OF PLANS. <i>H. J. Wessel</i>		D 4-1

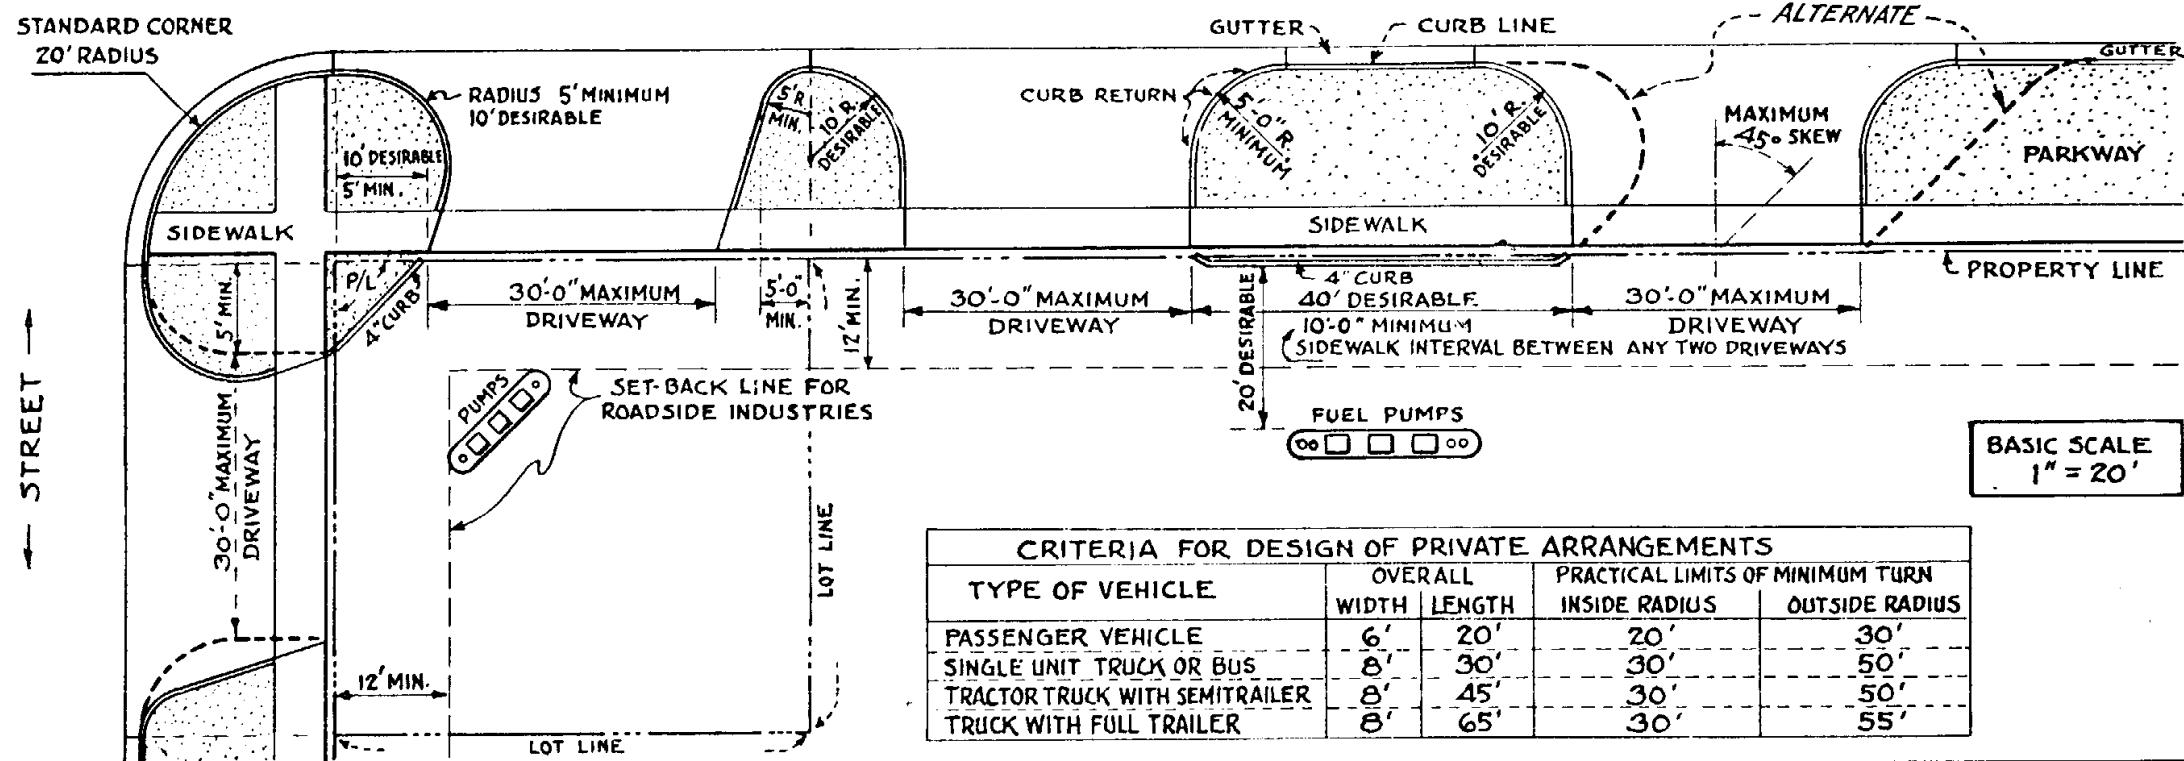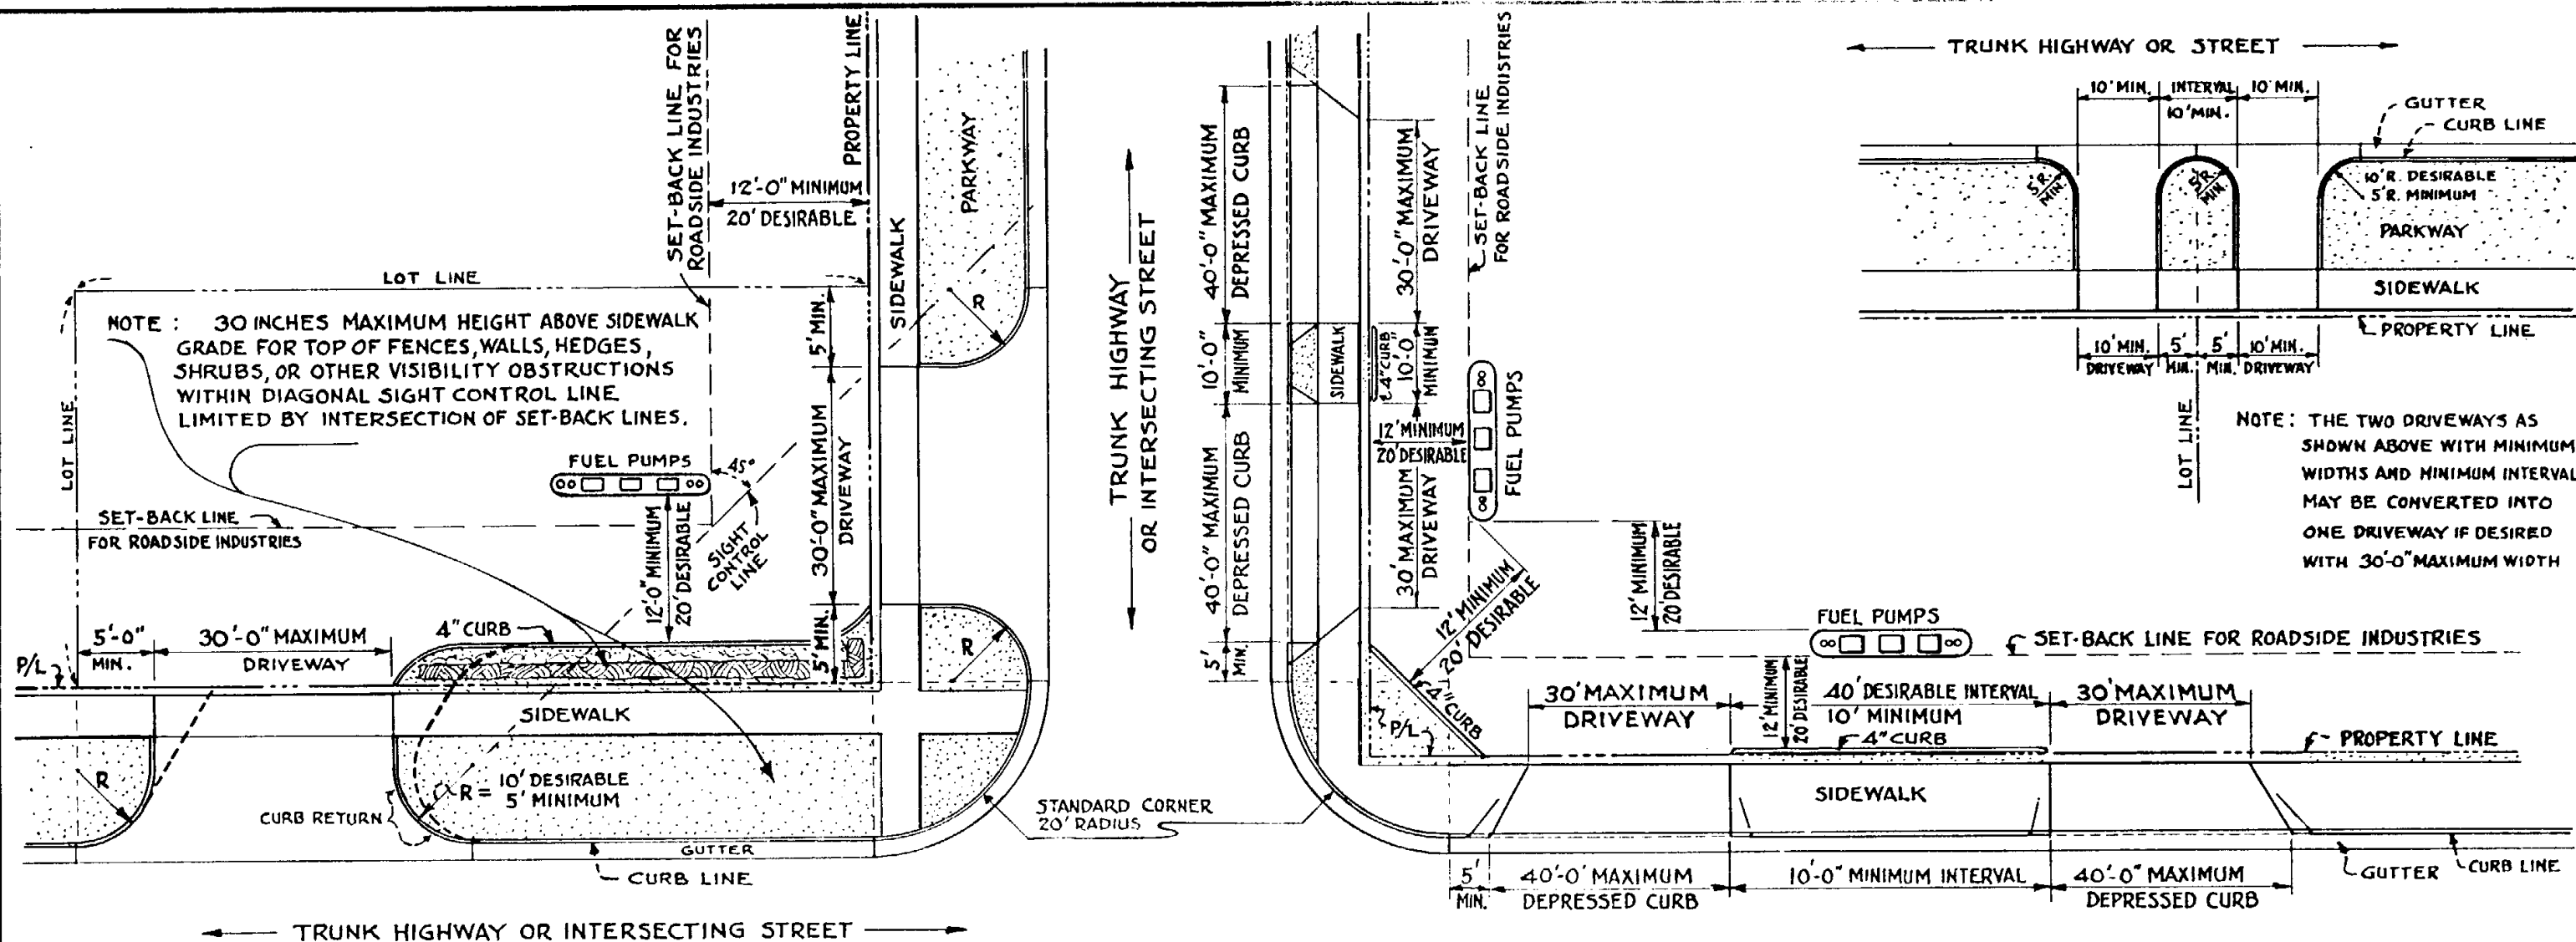

NOTES:

DEPRESSED CURBS OF APPROVED DESIGN MAY BE USED INSTEAD OF CURB RETURNS AT DRIVEWAY ENTRANCES, AND ARE INEVITABLE WHEN PARKWAY IS LESS THAN 5 FEET WIDE.

FOR GREATER SCOPE OF PUBLIC APPROVAL, SAFETY, CONVENIENCE, AND UTILIZATION, IT IS SUGGESTED THAT DIMENSIONS INDICATED AS MINIMUM BE AVOIDED WHEREVER POSSIBLE IN FAVOR OF THOSE INDICATED AS DESIRABLE. DIMENSIONS INDICATED AS MAXIMUM MUST NOT BE EXCEEDED.

THE LAYOUTS SHOWN ON THIS DRAWING DO NOT ATTEMPT TO DESIGN PRIVATE ARRANGEMENTS, BUT RATHER TO ILLUSTRATE RESTRICTIONS APPLICABLE TO CONSTRUCTION OF PRIVATE DRIVEWAY ENTRANCES AS RELATED TO HIGHWAYS WITH CURBS AND SIDEWALKS.

CRITERIA FOR DESIGN OF PRIVATE ARRANGEMENTS				
TYPE OF VEHICLE	OVERALL		PRACTICAL LIMITS OF MINIMUM TURN	
	WIDTH	LENGTH	INSIDE RADIUS	OUTSIDE RADIUS
PASSENGER VEHICLE	6'	20'	20'	30'
SINGLE UNIT TRUCK OR BUS	8'	30'	30'	50'
TRACTOR TRUCK WITH SEMITRAILER	8'	45'	30'	50'
TRUCK WITH FULL TRAILER	8'	65'	30'	55'

ARIZONA STATE HIGHWAY DEPARTMENT
PLANS DIVISION

PRIVATE DRIVEWAY RESTRICTIONS AS
RELATED TO HIGHWAYS WITH
TYPICAL URBAN DEVELOPMENTS

DRAWN AND TRACED MAY 1941
BY LESLIE MCDUGALL - HIGHWAY DESIGNER

CHECKED *H.H. Wessel*
APPROVED BY *H.H. Wessel*
ENGINEER OF PLANS

STANDARD DRWG. NO.

D 5-1

REV.
3-20-50
4-29-52
G.H.

BASIC SCALE
1" = 20'

[illegible]

TYPE OF VEHICLE	OVERALL		LIMITS OF MINIMUM TURN	
	WIDTH	LENGTH	INSIDE RADIUS	OUTSIDE RADIUS
PASSENGER VEHICLE OR STA. WAGON	6'	20'	20'	30'
SINGLE UNIT TRUCK OR BUS	8'	30'	30'	50'
TRACTOR TRUCK WITH SEMITRAILER	8'	45'	30'	50'
TRUCK WITH FULL TRAILER	8'	65'	30'	55'


NOTE:

TO PROVIDE ADEQUATE CLEARANCE WHICH WILL ACCOMMODATE VEHICLES OF VARIOUS TYPES MAKING SHARPEST TURNS, OBSERVE THE FOLLOWING DIMENSIONS

27' MINIMUM FOR LARGE TRUCK WITH FULL TRAILER

22' MINIMUM FOR TRACTOR-TRUCK SEMITRAILER

16' MINIMUM FOR LIGHT TRUCKS AND PASSENGER VEHICLES

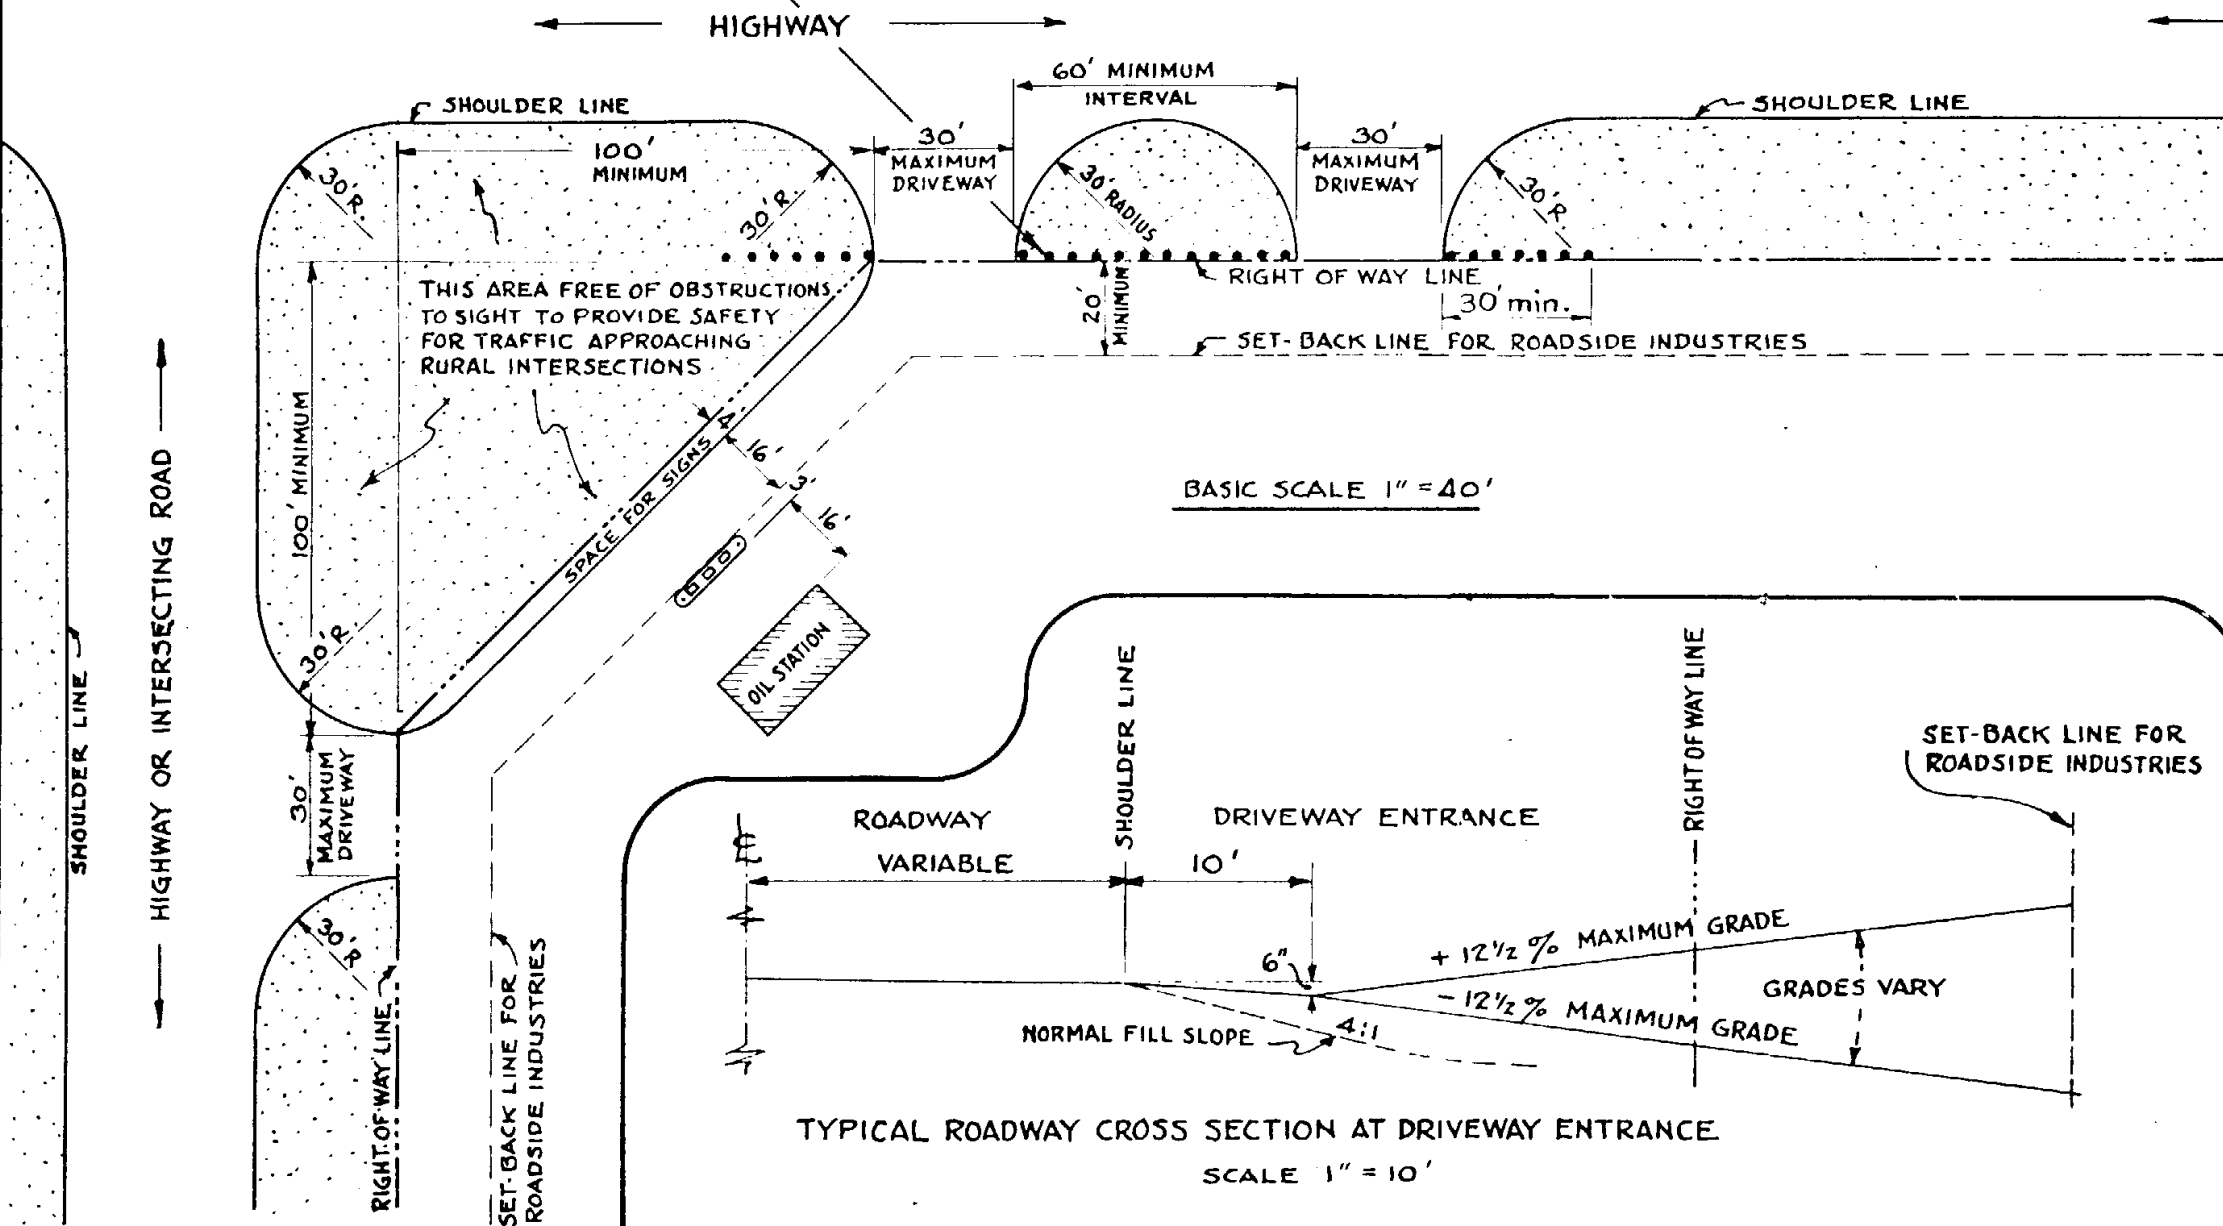

REVISION
PLAN "A"

NOTE: THE LAYOUTS SHOWN ON THIS DRAWING DO NOT ATTEMPT TO DESIGN PRIVATE ARRANGEMENTS, BUT RATHER TO ILLUSTRATE RESTRICTIONS APPLICABLE TO DESIGN AND CONSTRUCTION OF PRIVATE DRIVEWAY ENTRANCES AS RELATED TO HIGHWAYS WITHOUT CURBS, TYPICAL OF RURAL DEVELOPMENTS. PAVEMENT WIDTHS NOT SHOWN.

ARIZONA STATE HIGHWAY DEPARTMENT
PLANS DIVISION

REV.
1-29-52
G.H.

DRIVEWAY RESTRICTIONS AS RELATED TO HIGHWAYS WITH TYPICAL RURAL DEVELOPMENTS


DRAWN AND TRACED MAY 1941
BY LESLIE M'DOUGALL - HIGHWAY DESIGNER

CHECKED

APPROVED BY
ENGINEER OF PLANS

STANDARD DRWG. NO.

D 5-2

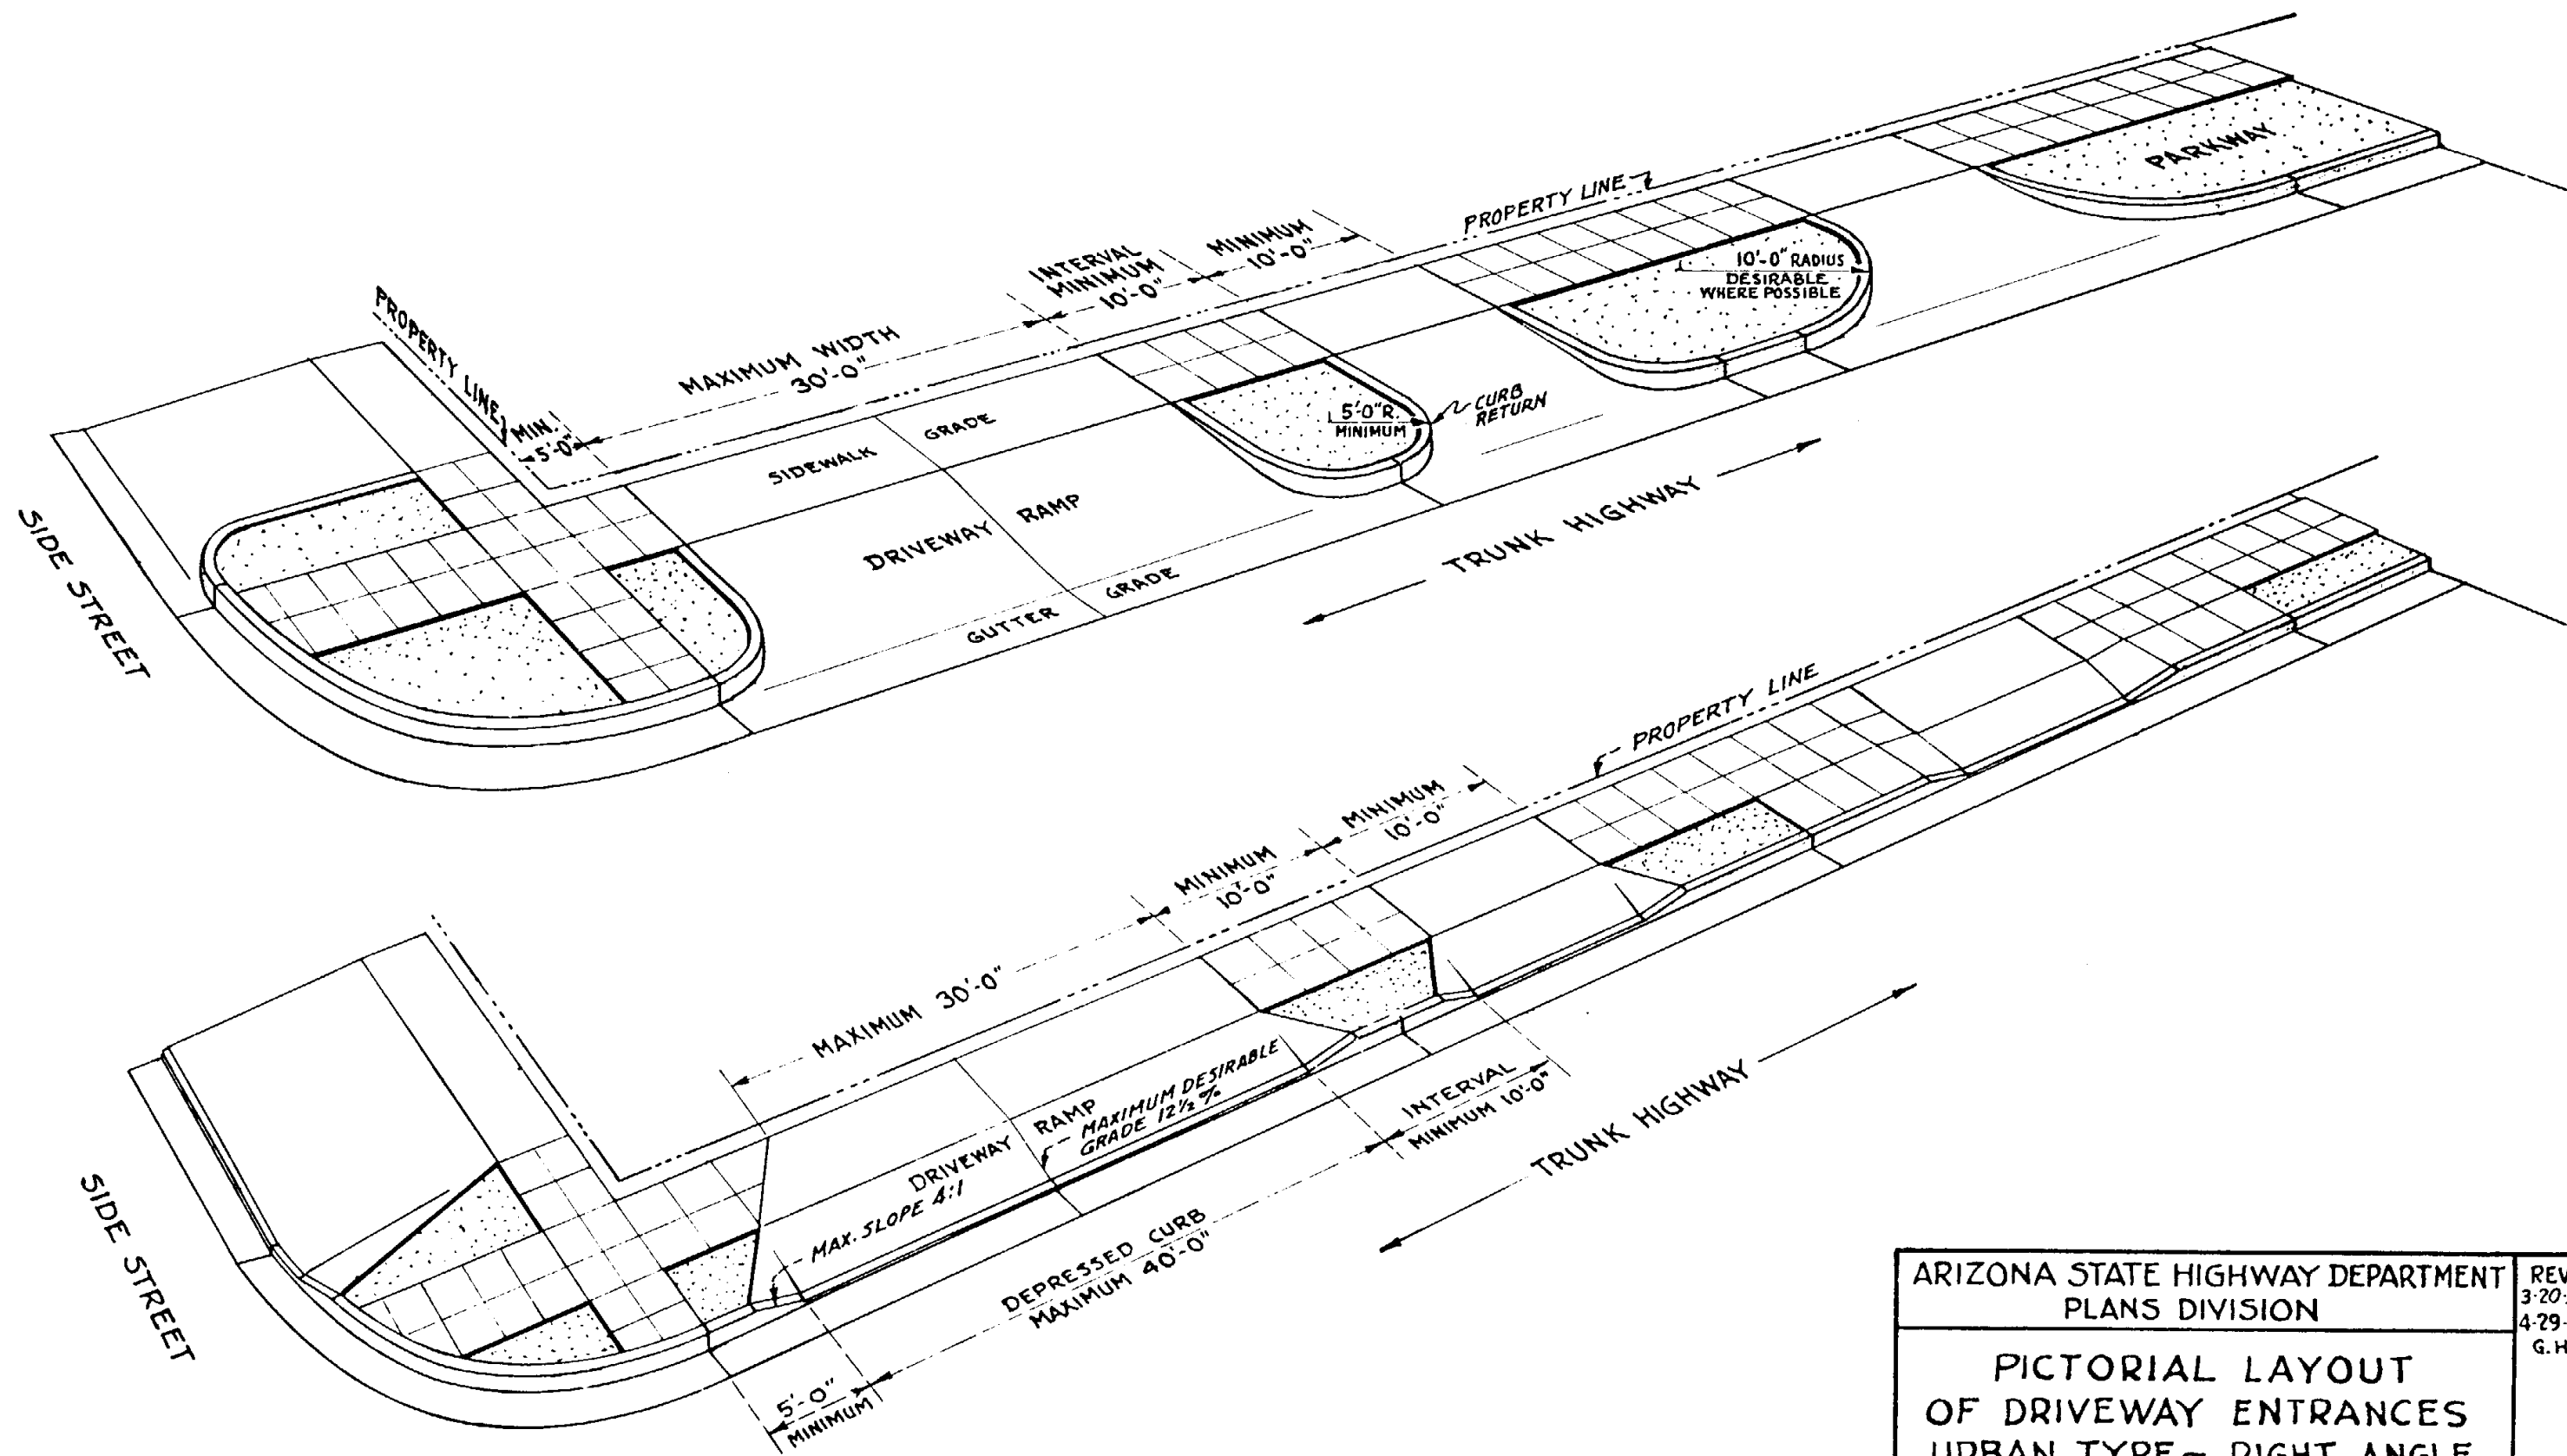

ARIZONA STATE HIGHWAY DEPARTMENT
PLANS DIVISION

REV.
3-20-50
4-29-52
G.H.


PICTORIAL LAYOUT
OF DRIVEWAY ENTRANCES
URBAN TYPE - RIGHT ANGLE

DRAWN
TRACED
CHECKED
APPROVED
PLANS ENG'R.

LESLIE M'DOUGALL, 1941
LESLIE M'DOUGALL, 1981
H.H. Wesel
H.H. Wesel

STANDARD DRWG. NO.

D5-3

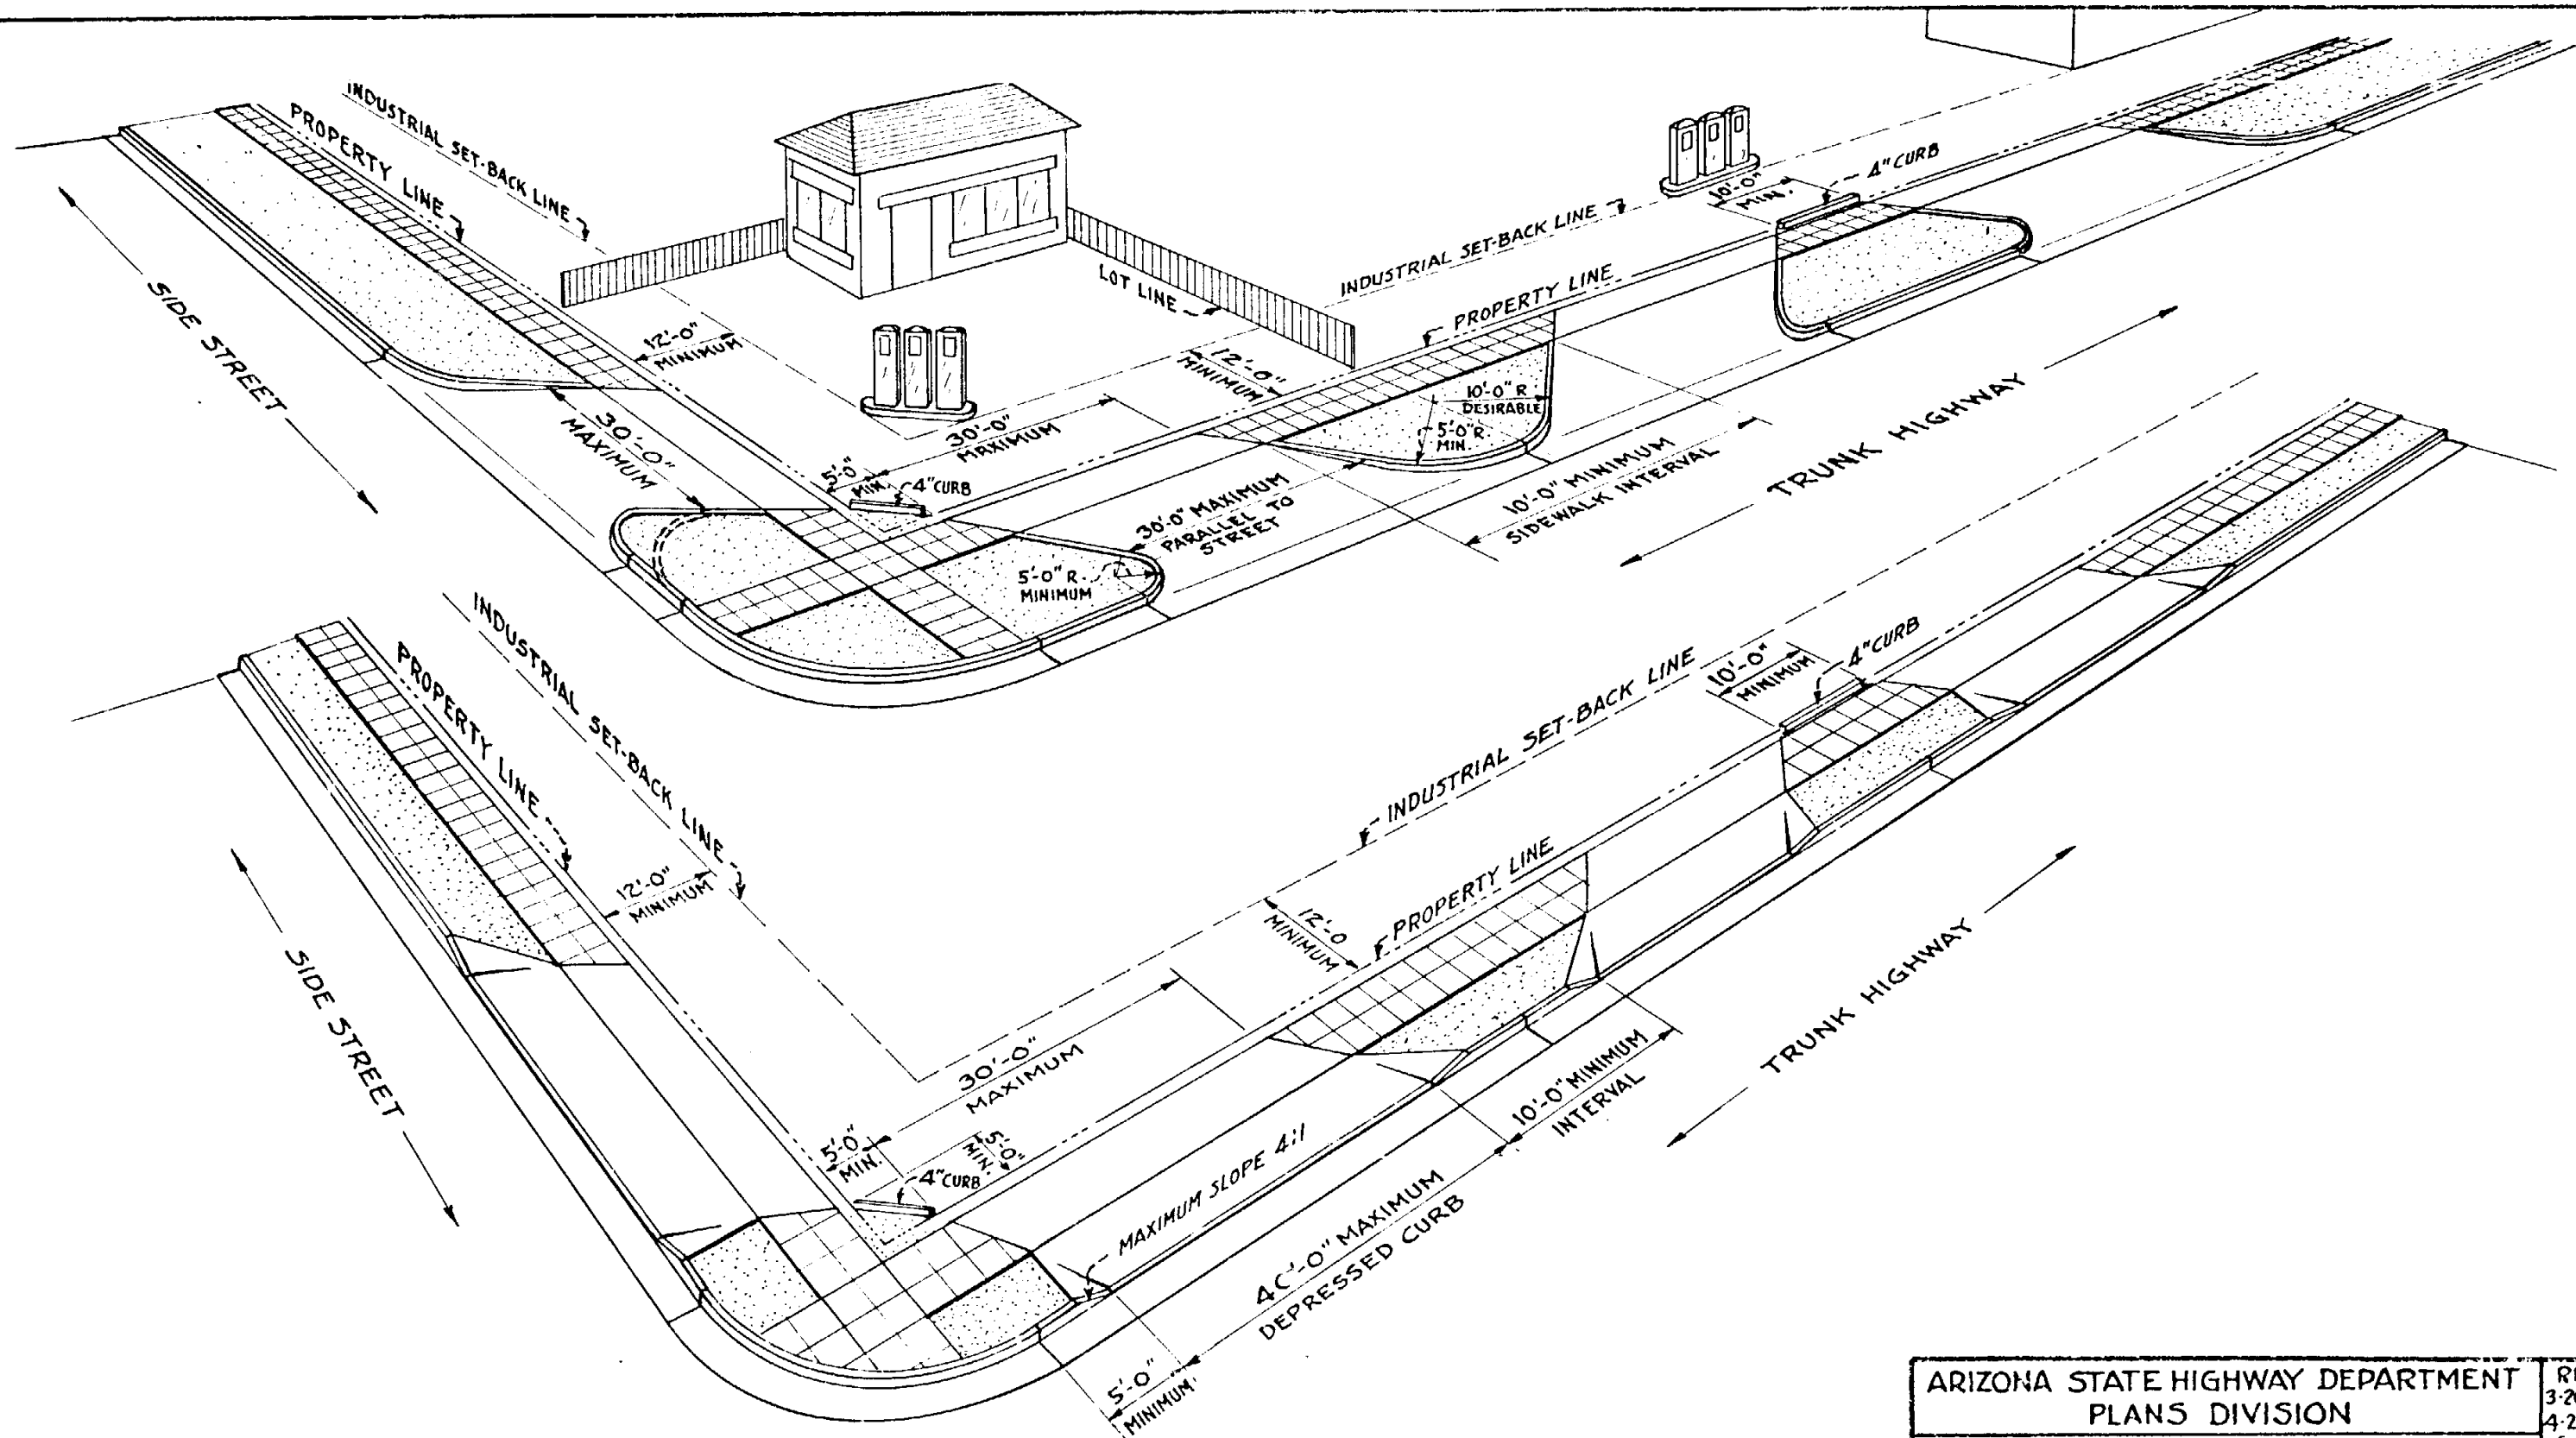


ARIZONA STATE HIGHWAY DEPARTMENT
PLANS DIVISION

PICTORIAL LAYOUT
OF DRIVEWAY ENTRANCES
URBAN TYPE - SKEWED

DRAWN	LESLIE MCDUGALL, 1941	STANDARD DRWG. NO. D5-4
TRACED	LESLIE MCDUGALL, 1941	
CHECKED	H.H. Glesser	
APPROVED PLANS ENG'R	H.H. Glesser	

REV.
3-20-50
4-29-52
G.H.

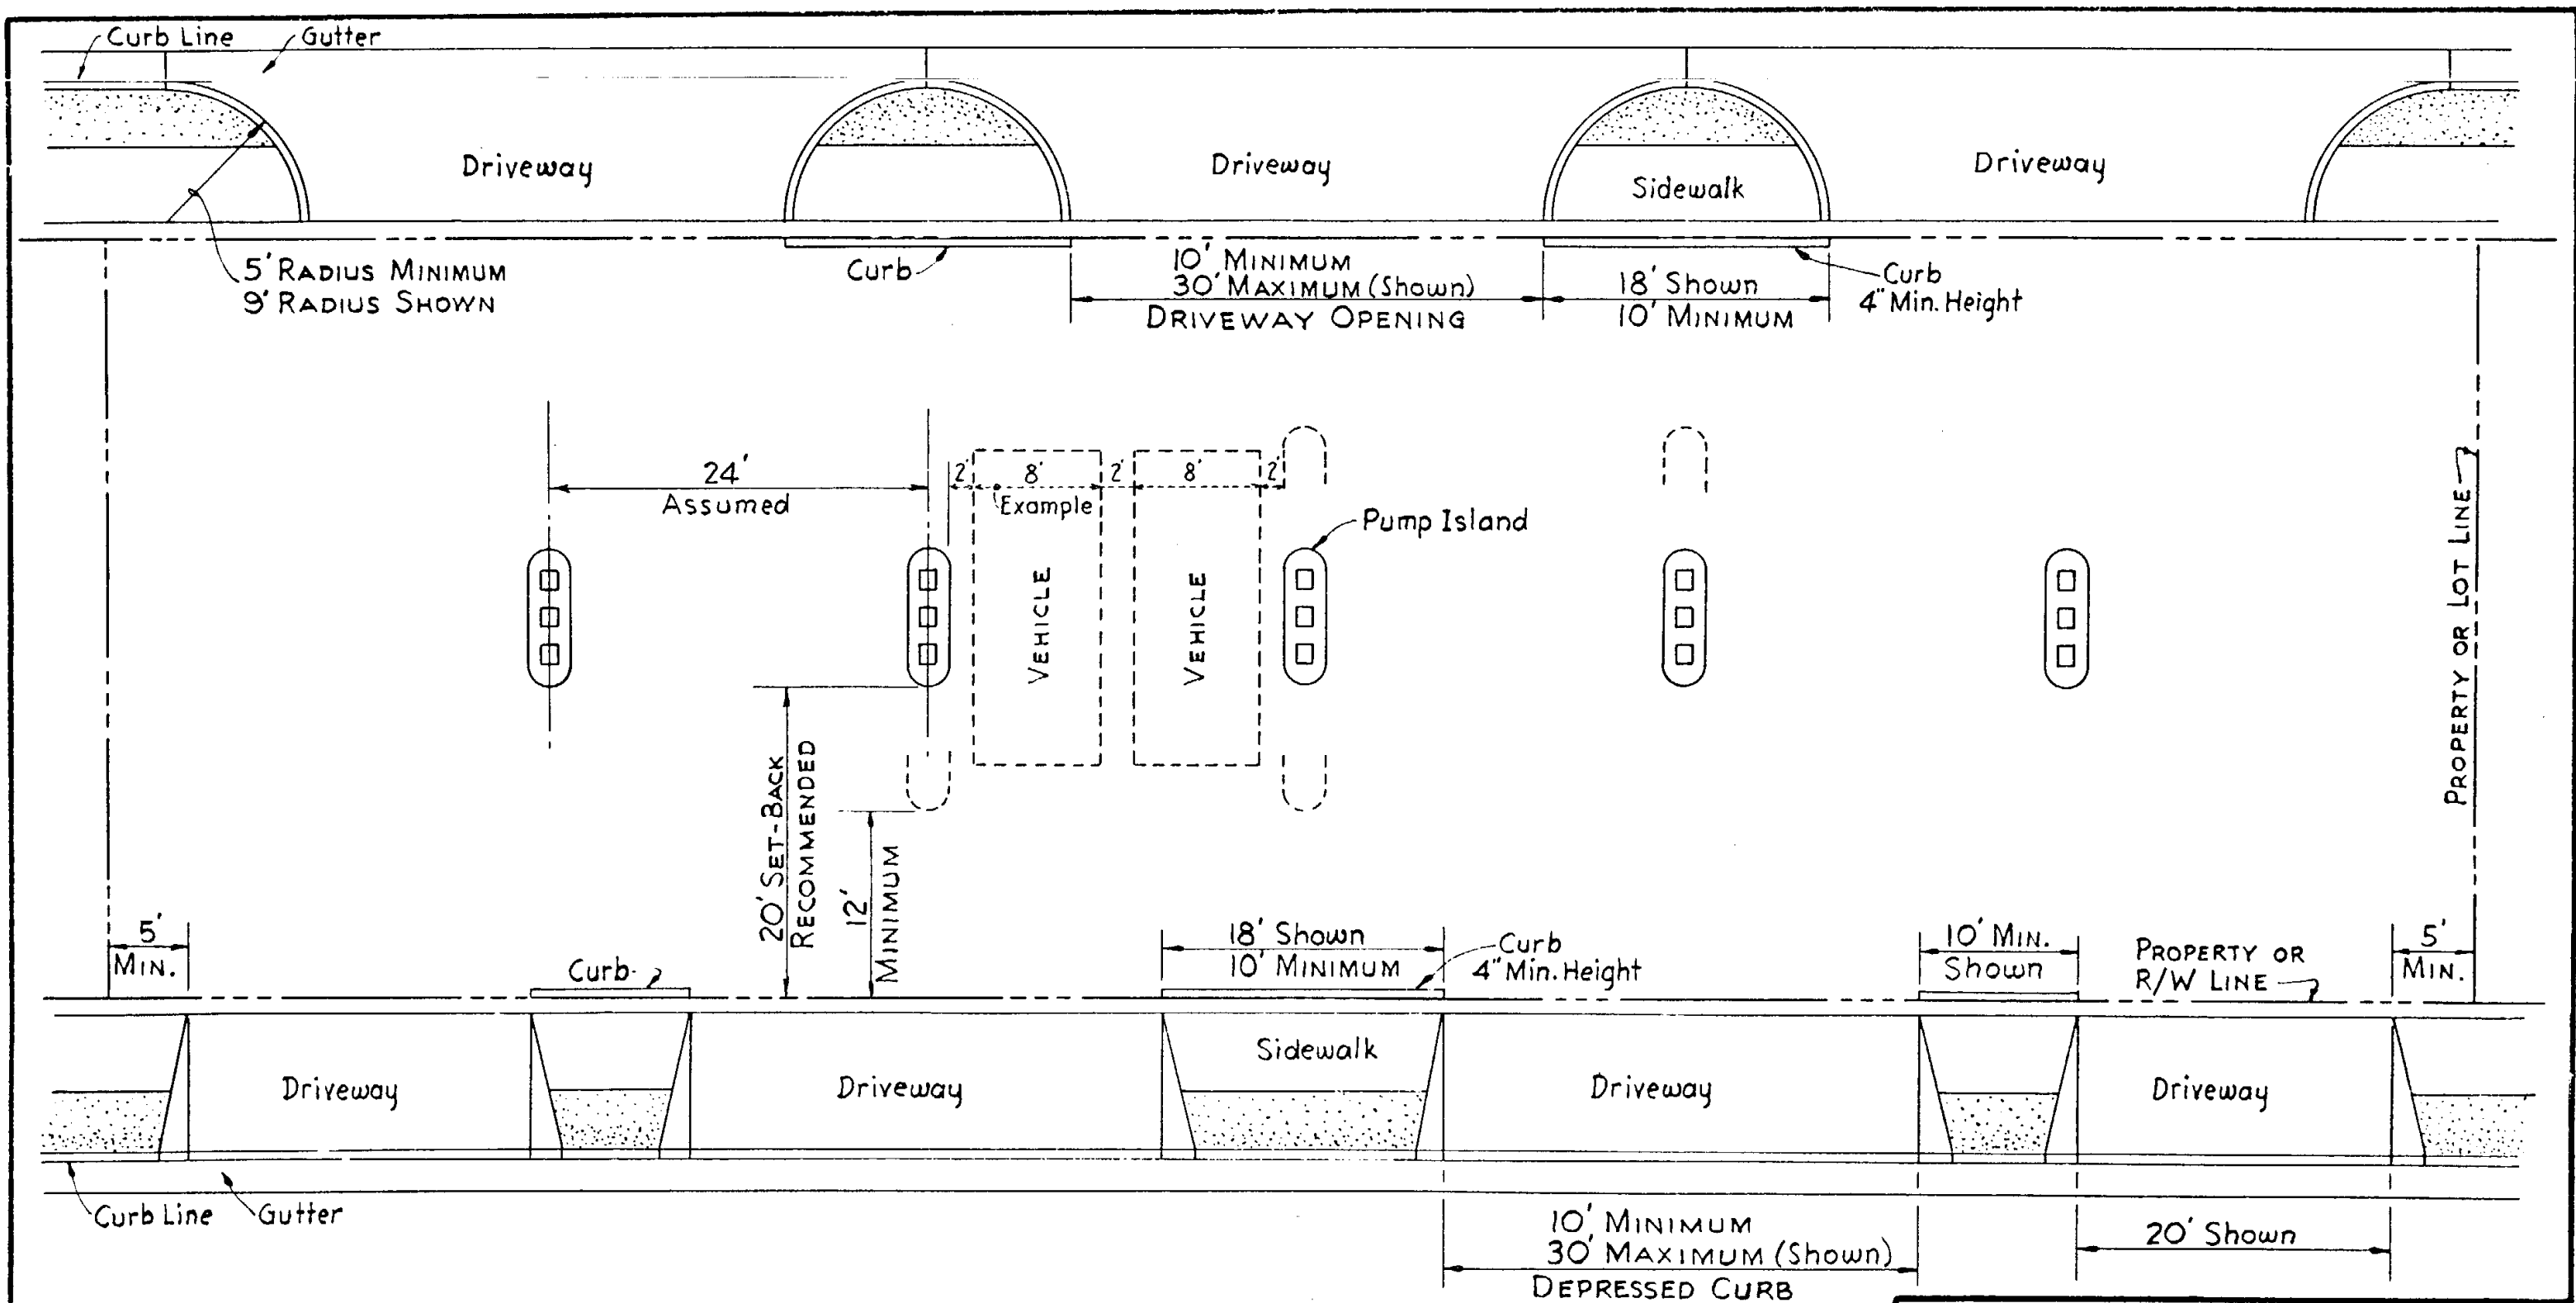


DRAWING SHOWING APPLICATION OF STD. D5-1.
DRIVEWAY ARRANGEMENTS POSSIBLE IN THE CASE OF
A MULTIPLE SERVICE STATION.

ARIZONA STATE HIGHWAY DEPARTMENT
PLANS DIVISION


MULTIPLE DRIVEWAY ARRANGEMENTS

Drawn	L. M. Dougall Apr. 1950	STANDARD DRWG. NO. D5-5
Traced	G. Heidecker Apr. 1950	
Checked		
Approved by Engr. of Plans	<i>H. H. Wessel</i>	


REV.

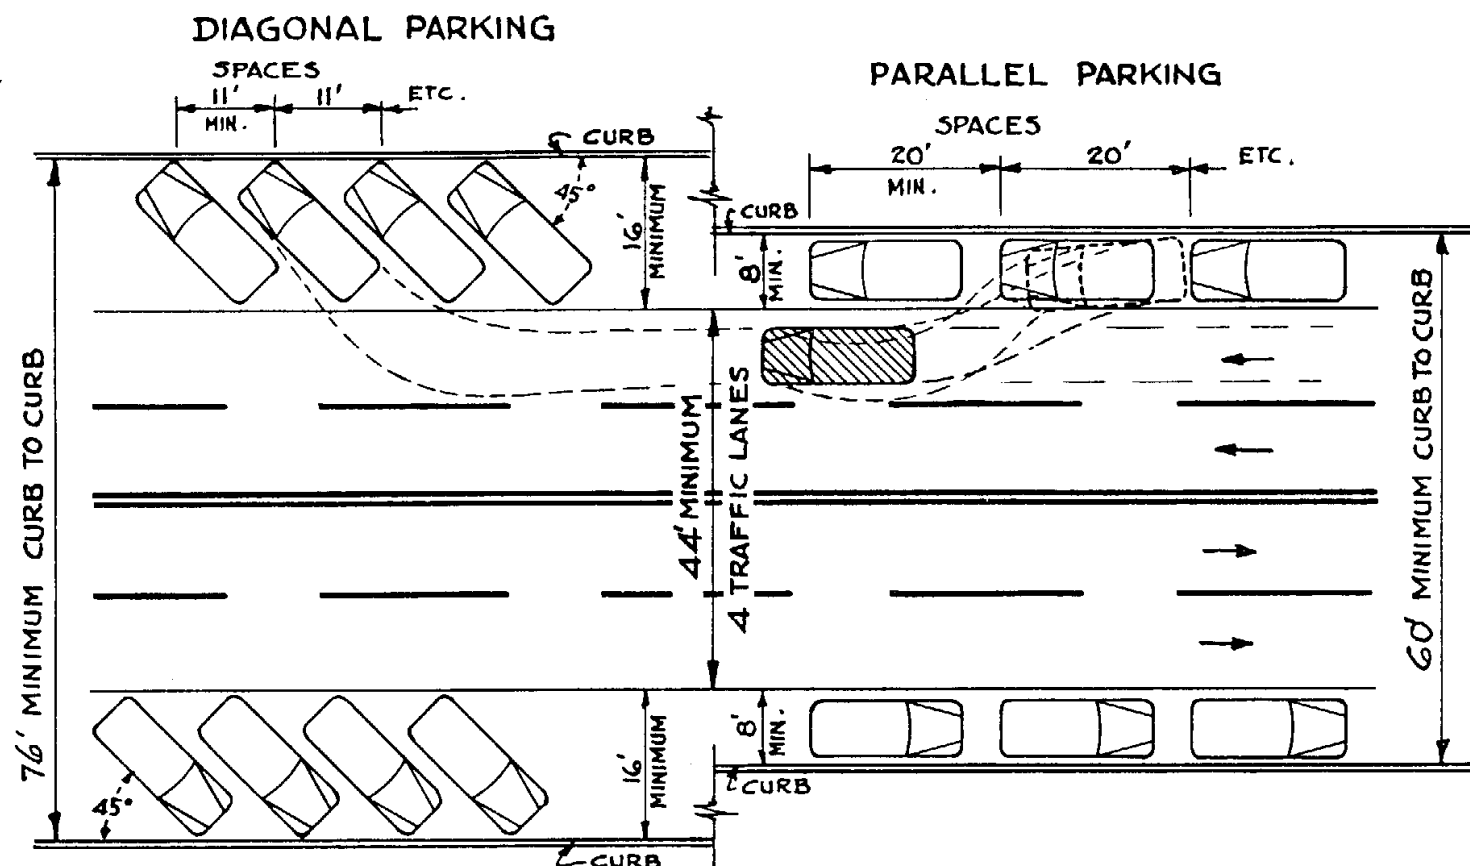

4 TRAFFIC LANES
OVER 300 VEHICLES PER HOUR

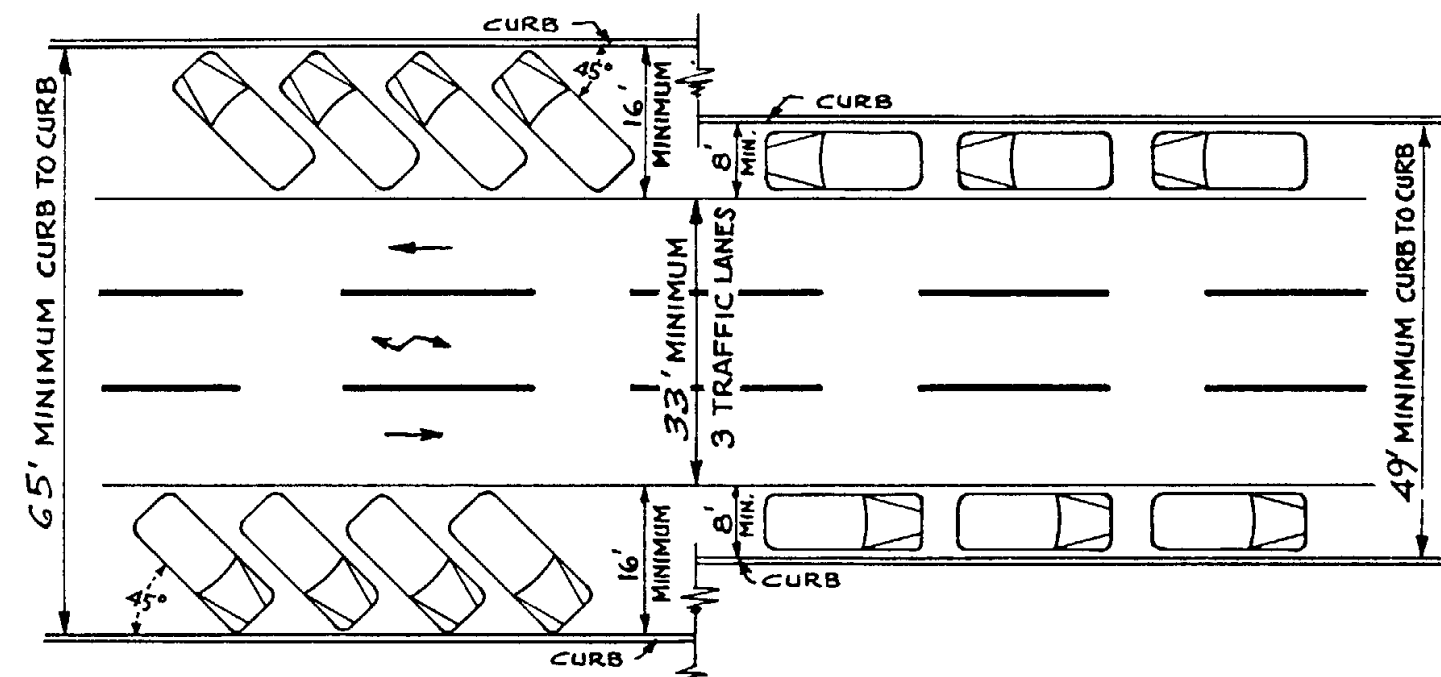

3 TRAFFIC LANES
200 TO 300 VEHICLES PER HOUR

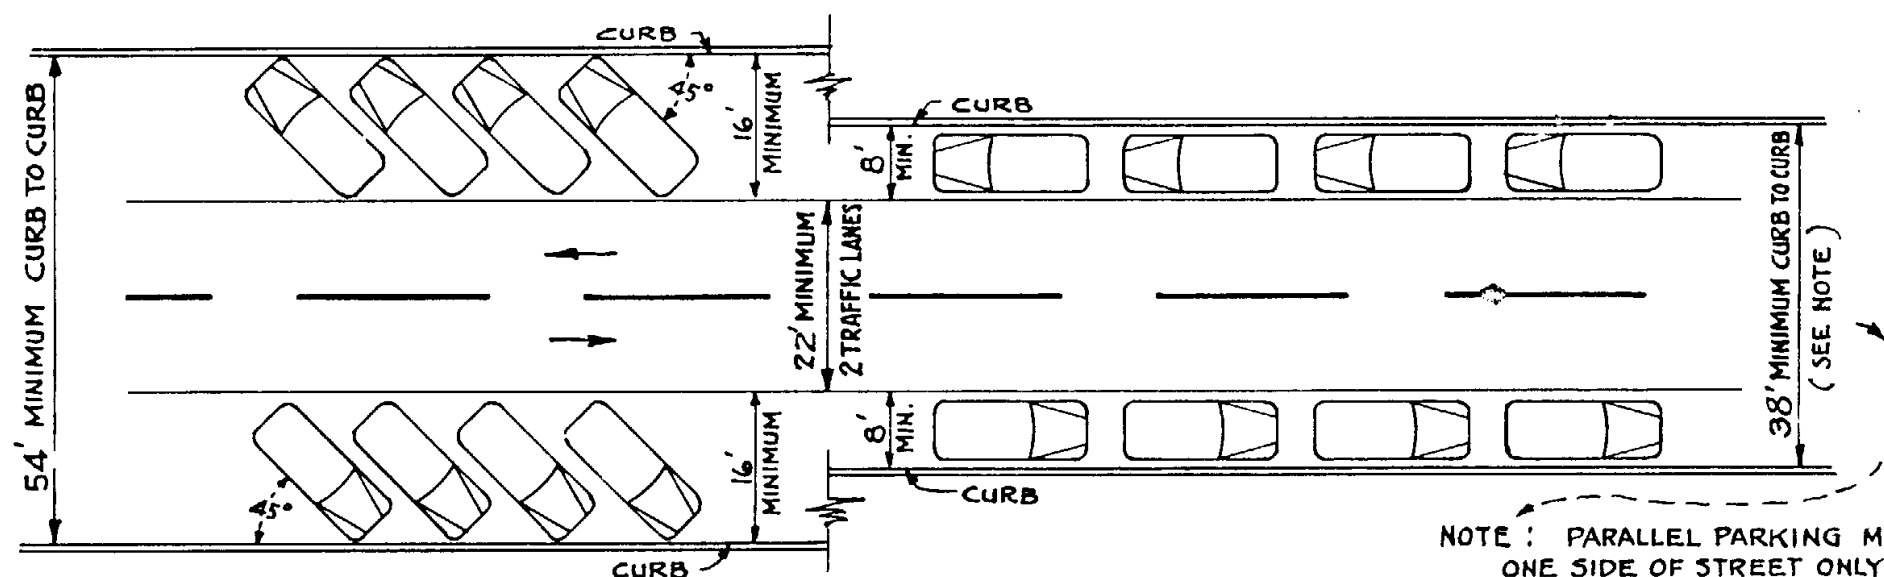

2 TRAFFIC LANES
UNDER 200 VEHICLES PER HOUR

NOTE: PARALLEL PARKING MAY BE PERMITTED ON ONE SIDE OF STREET ONLY, WHEN WIDTH BETWEEN CURBS IS UNDER 38' BUT OVER 28'. IF UNDER 28', PERMIT NO PARKING WHATSOEVER.

NOTE:
THE MINIMUM DIMENSIONS SHOWN ON THIS DRAWING FOR DIFFERENT CONDITIONS OF PARKING AND FOR TRAFFIC LANES MUST NOT BE CONSTRUED AS DESIRABLE IN THE LIGHT OF MODERN DESIGN STANDARDS, BUT RATHER AS MINIMUM REQUIREMENTS FOR EXISTING FACILITIES, TYPICAL OF URBAN DEVELOPMENTS. PARKING LANE WIDTHS AND SPACES SHOWN HERE ARE BASED ON MINIMUM REQUIREMENTS FOR PASSENGER VEHICLES AND CONFORM TO A.A.S.H.O. POLICY.

ARIZONA STATE HIGHWAY DEPARTMENT
PLANS DIVISION

REV.
8-17-55

PARKING ON STATE HIGHWAYS

DRAWN AND TRACED MAY 19, 1941
BY LESLIE McDOUGALL - HWY. DESIGNER

STANDARD DRWG. NO.



CHECKED BY

APPROVED BY
ENGINEER OF PLANS *H. Wessel*

D 6-1

NAME OF HIGHWAY
COUNTY

FED. ROAD DIV. NO.	STATE	PROJ. NO.	SHEET NO.	TOTAL SHEETS	AS BUILT
7	ARIZ.				

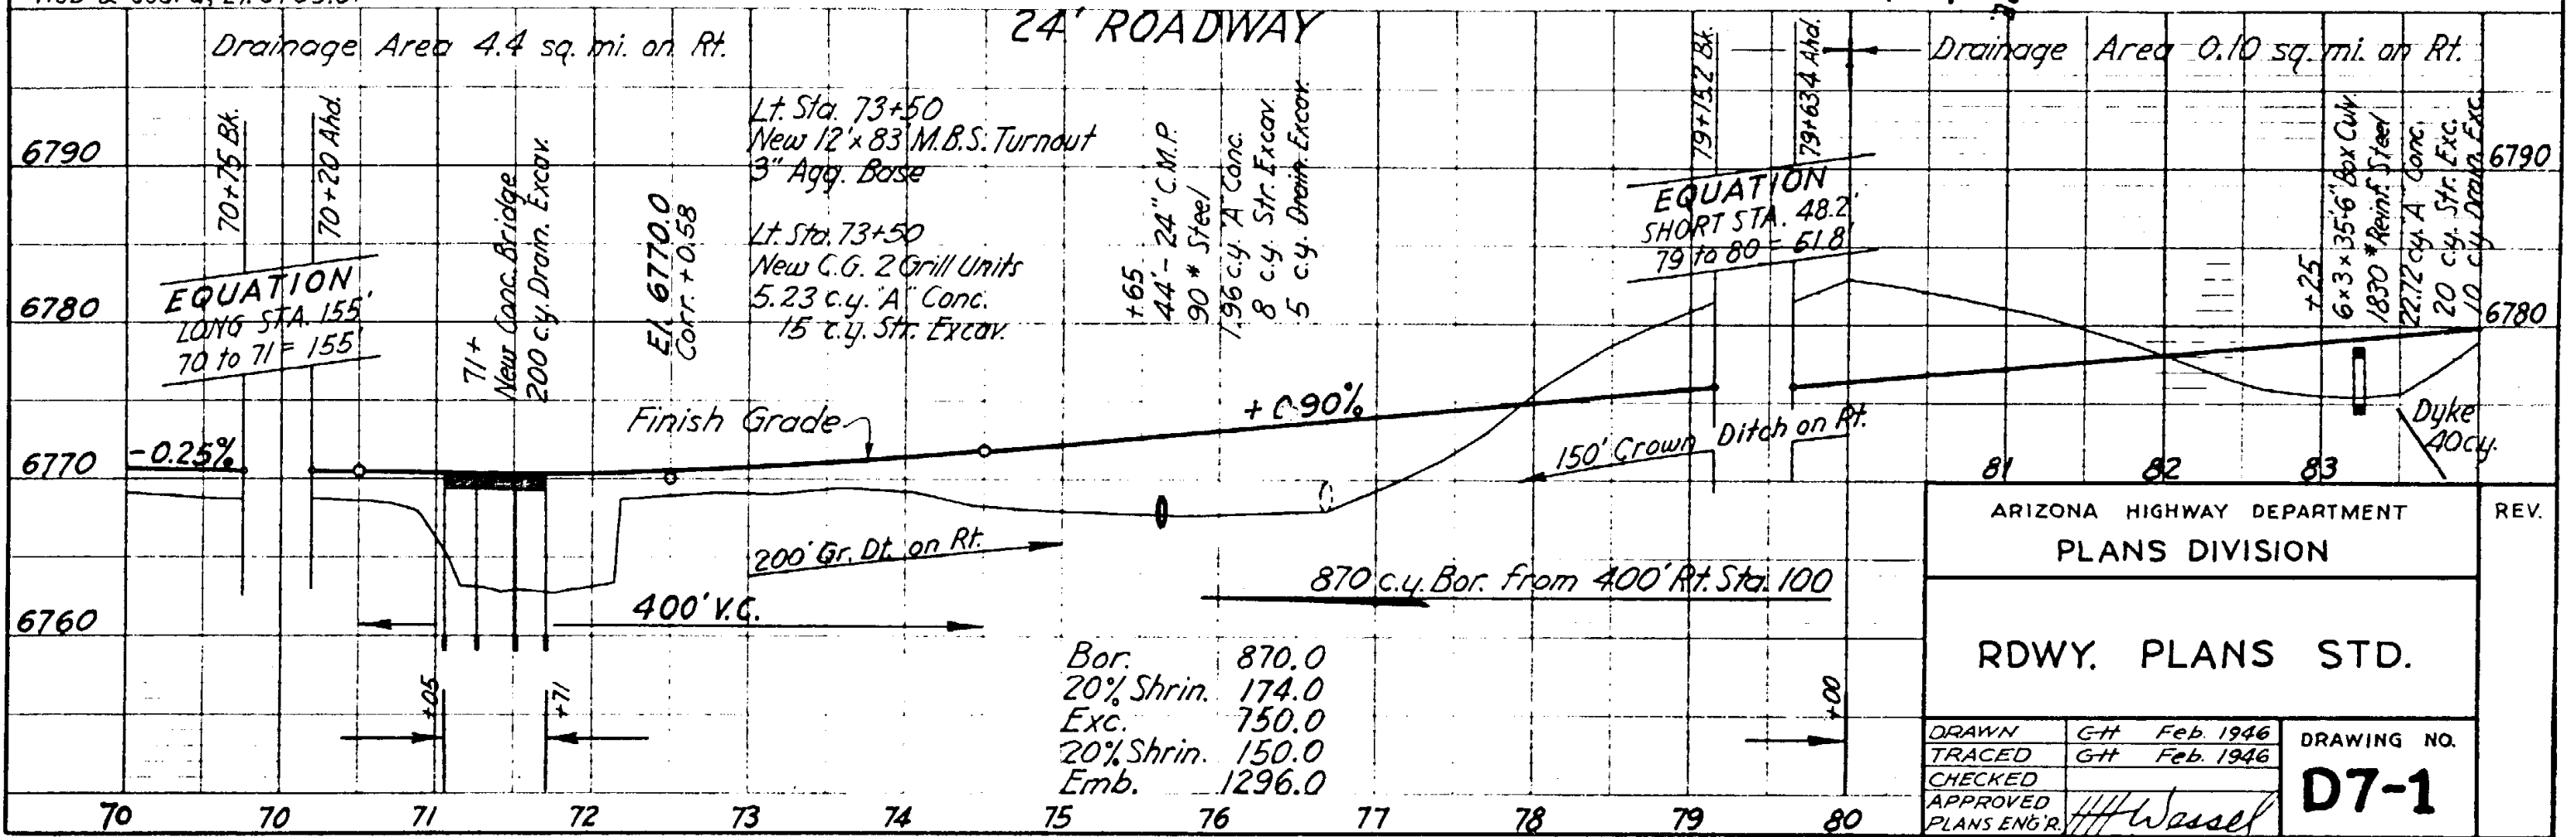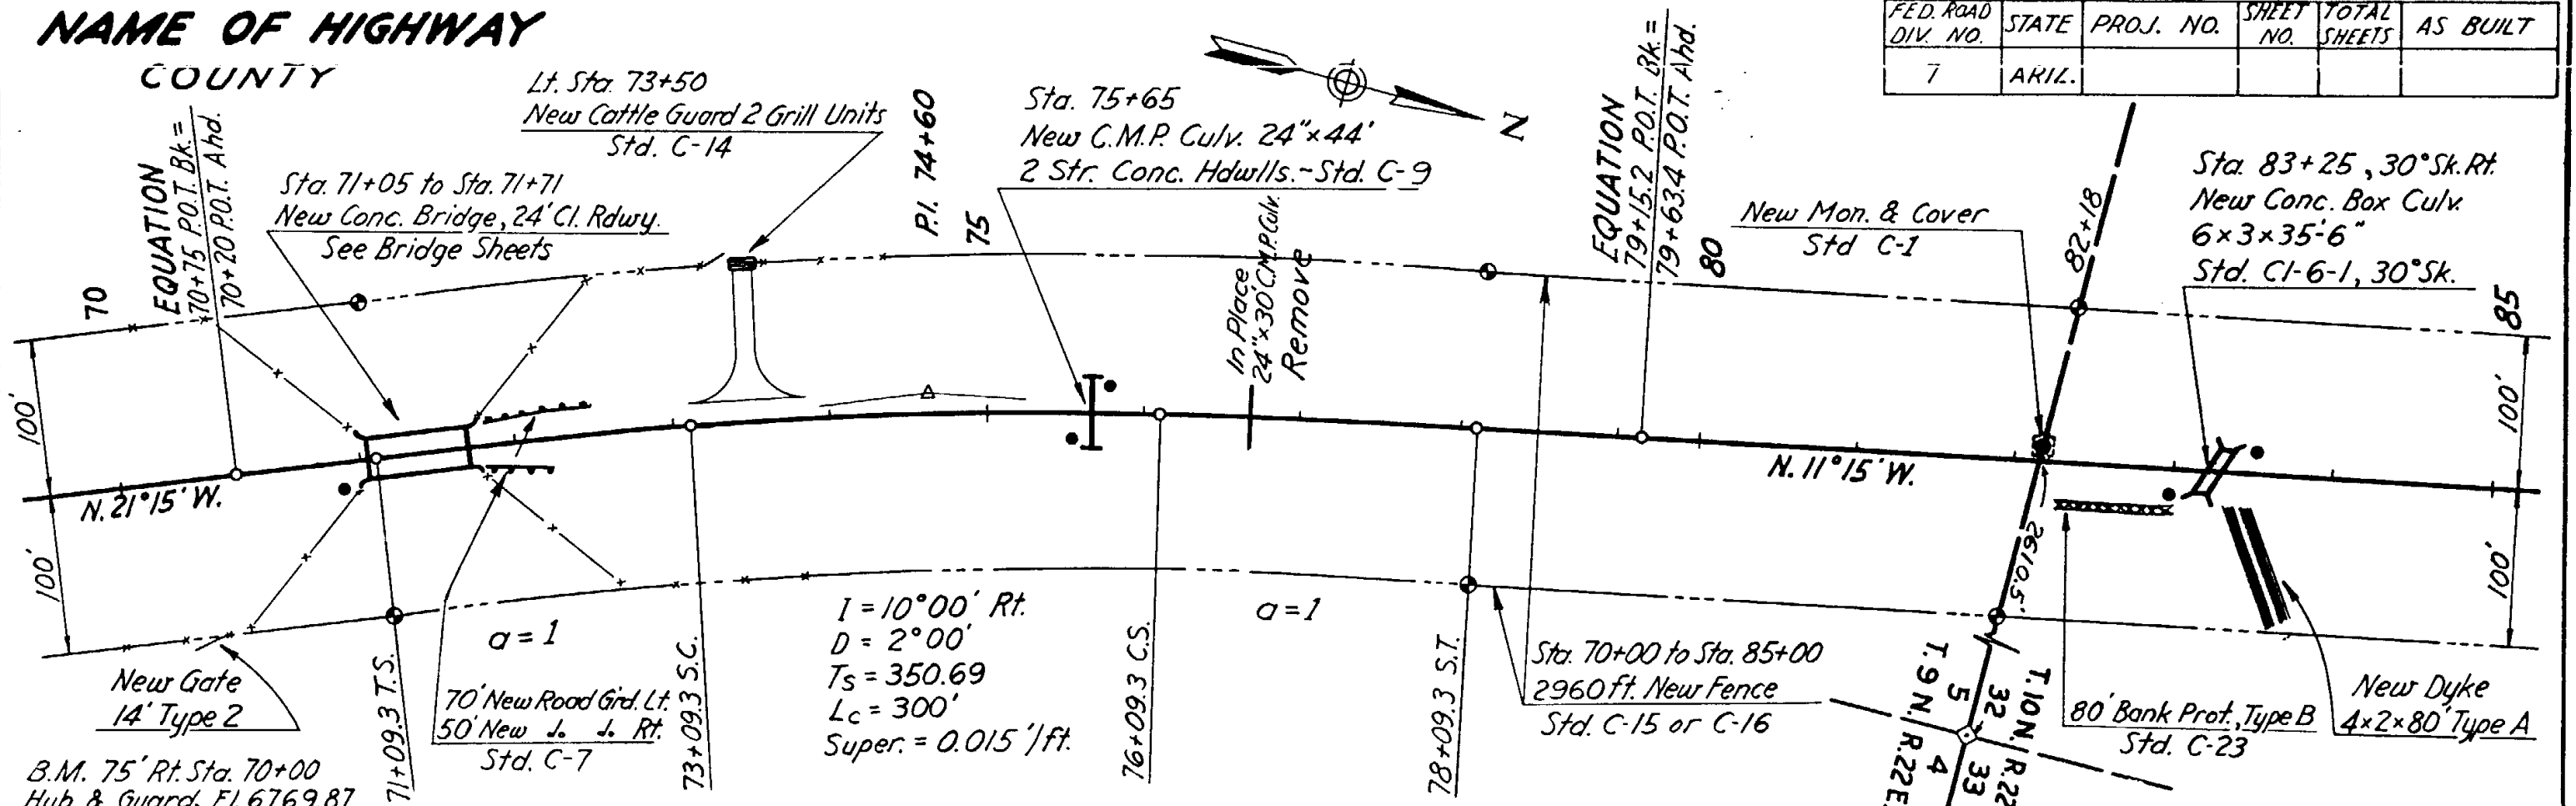

STANDARD NOTATIONS FOR STRUCTURES

STRUCTURES

(Over 20' Clear Span)

Sta. _____ to Sta. _____
 New Conc. ^{BOX}BRIDGE Culvert (Sk. ^{°RT.}LT.)
 (NO. SPANS) (WIDTH) (HEIGHT) (LENGTH) _____ Rdwy.
 See Bridge Sheet(s) & Standard(s) _____

Sta. _____ to Sta. _____
 New ^{CONC.}STEEL ^{TIMBER} Bridge, _____ Cl. Rdwy.
 See Bridge Sheet(s) & Standard(s) _____

Sta. _____ to Sta. _____
 _____ In Place _____ Rdwy.
 See Bridge Sheet(s) & Standard(s) _____

STRUCTURES

(20' Clear Span or Less)

Sta. _____ (Sk. ^{°RT.}LT.) _____
 New Conc. ^{BOX}BRIDGE Culvert _____
 NO. SPANS SIZE HEIGHT LENGTH _____
 Standard(s) _____

Sta. _____
 Conc. ^{BOX}BRIDGE Culvert In Place
 Extend Lt. _____ Extend Rt. _____
 See Bridge Sheets & Standard(s) _____

PIPES

Sta. _____ (Sk. ^{°RT.}LT.) _____
 New C.M.P. Culvert SIZE x LENGTH _____
 _____ Hdwl.(s), Std. _____

Sta. _____
 New ^{PLAIN}REINF. Conc. Pipe Culv. SIZE x LENGTH _____
 _____ Hdwl.(s), Std. _____

Sta. _____
 NO. SIZE LENGTH ^{CONC. PIPE}C.M.P. Culv. In Place
 Remove (& Reset at Sta. _____)
 (New _____ Culvert SIZE x LENGTH _____
 _____ Hdwl.(s) Sta. _____

Sta. _____
 NO. SIZE LENGTH ^{CONC. PIPE}C.M.P. Culv. In Place
 To Remain (Remove Headwalls)
 New _____ Ext. Lt., Ext. Rt. _____
 _____ Hdwl.(s) Std. _____

FORDS

Sta. _____ to Sta. _____
 New _____ Ford _____ Ft. Long
 Standard _____

MISCELLANEOUS

Sta. _____
 New Cattle Guard _____ Grill Units
 Standard _____


_____ Ft. Road Guard
 Standard _____

Sta. _____ to Sta. _____
 _____ Ft. ^{NEW}RECONST. Fence, Std. _____

Use No. 6 Guide Lines

ARIZONA HIGHWAY DEPARTMENT PLANS DIVISION		REV.
STRUCTURE NOTATIONS		
DRAWN	GH Feb. 1946	DRAWING NO.
TRACED	GH Feb. 1946	D7-2
CHECKED		
APPROVED PLANS ENGR	H. Wessel	


FED ROAD DIV NO.	STATE	PROJ. NO.	SHEET NO.	TOTAL SHEETS	AS BUILT
1	ARIZ.				
7 1/2 10	5 0	12 10	5 0	5 10	10 10

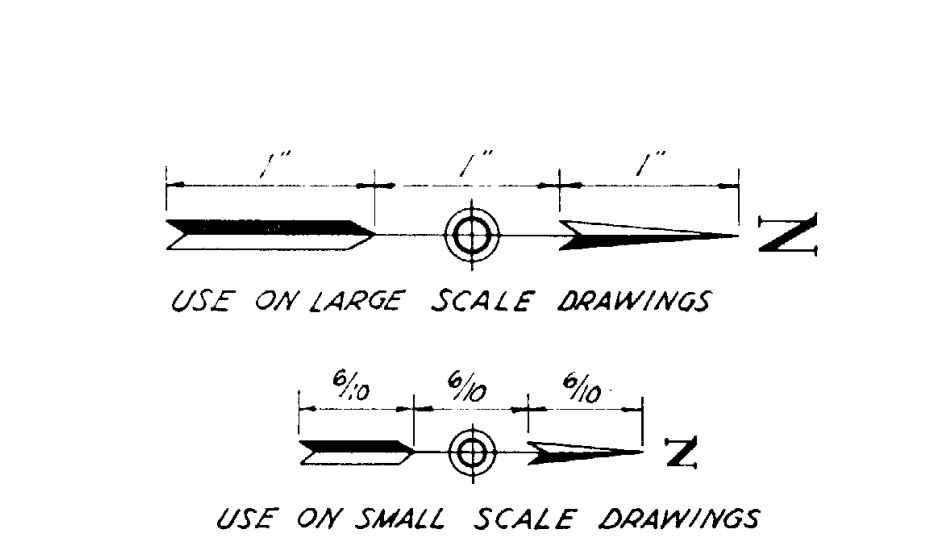

- STATE OR NATIONAL LINE
- COUNTY LINE
- TOWNSHIP OR RANGE LINE
- SECTION LINE
- QUARTER SECTION LINE
- FOREST OR RESERVATION LINE
- HWY. RIGHT OF WAY LINE
- TRANSIT OR SURVEY LINE
- PROFILE GRADE LINE
- PROFILE GROUND LINE
- LAND SURVEY CORNERS
- TELEPHONE OR TELEGRAPH LINE
- POWER LINE
- TRAFFIC SIGN
- ROAD GUARD
- GUIDE POSTS
- STANDARD FENCE (BARB. WIRE)
- SPECIAL FENCE (FABRIC. WIRE)
- CORR. METAL CULVERTS
- REINF. CONCRETE CULVERTS
- BRIDGES
- CATTLE GUARD
- RIGHT OF WAY MARKER
- EXISTING PAVEMENT
- RAILROAD TRACK
- TREES AND SHRUBS
- DIKE OR LEVEE

- CHANNEL OR DITCH
- UNFENCED PROPERTY
- RETAINING WALL
- DROP INLET
- GUY POLE
- BANK PROTECTION
- RAILROAD WARNING SIGN
- SIDE ROAD TURNOUT
- MANHOLE
- SURVEY MON. COVER
- NEW MIX. BIT. SURFACE
- NEW P.C. CONCRETE
- RELAI D SALV. M. B. SURFACE
- AGGREGATE BASE { COARSE, FINE
- SELECT MATERIAL

ARIZONA HIGHWAY DEPARTMENT PLANS DIVISION		REV.
PLANS SYMBOLS		
DRAWN TRACED CHECKED APPROVED PLANS ENGR.	GHT Feb. 1946 GHT Feb. 1946 [Signature] [Signature]	DRAWING NO D7-3

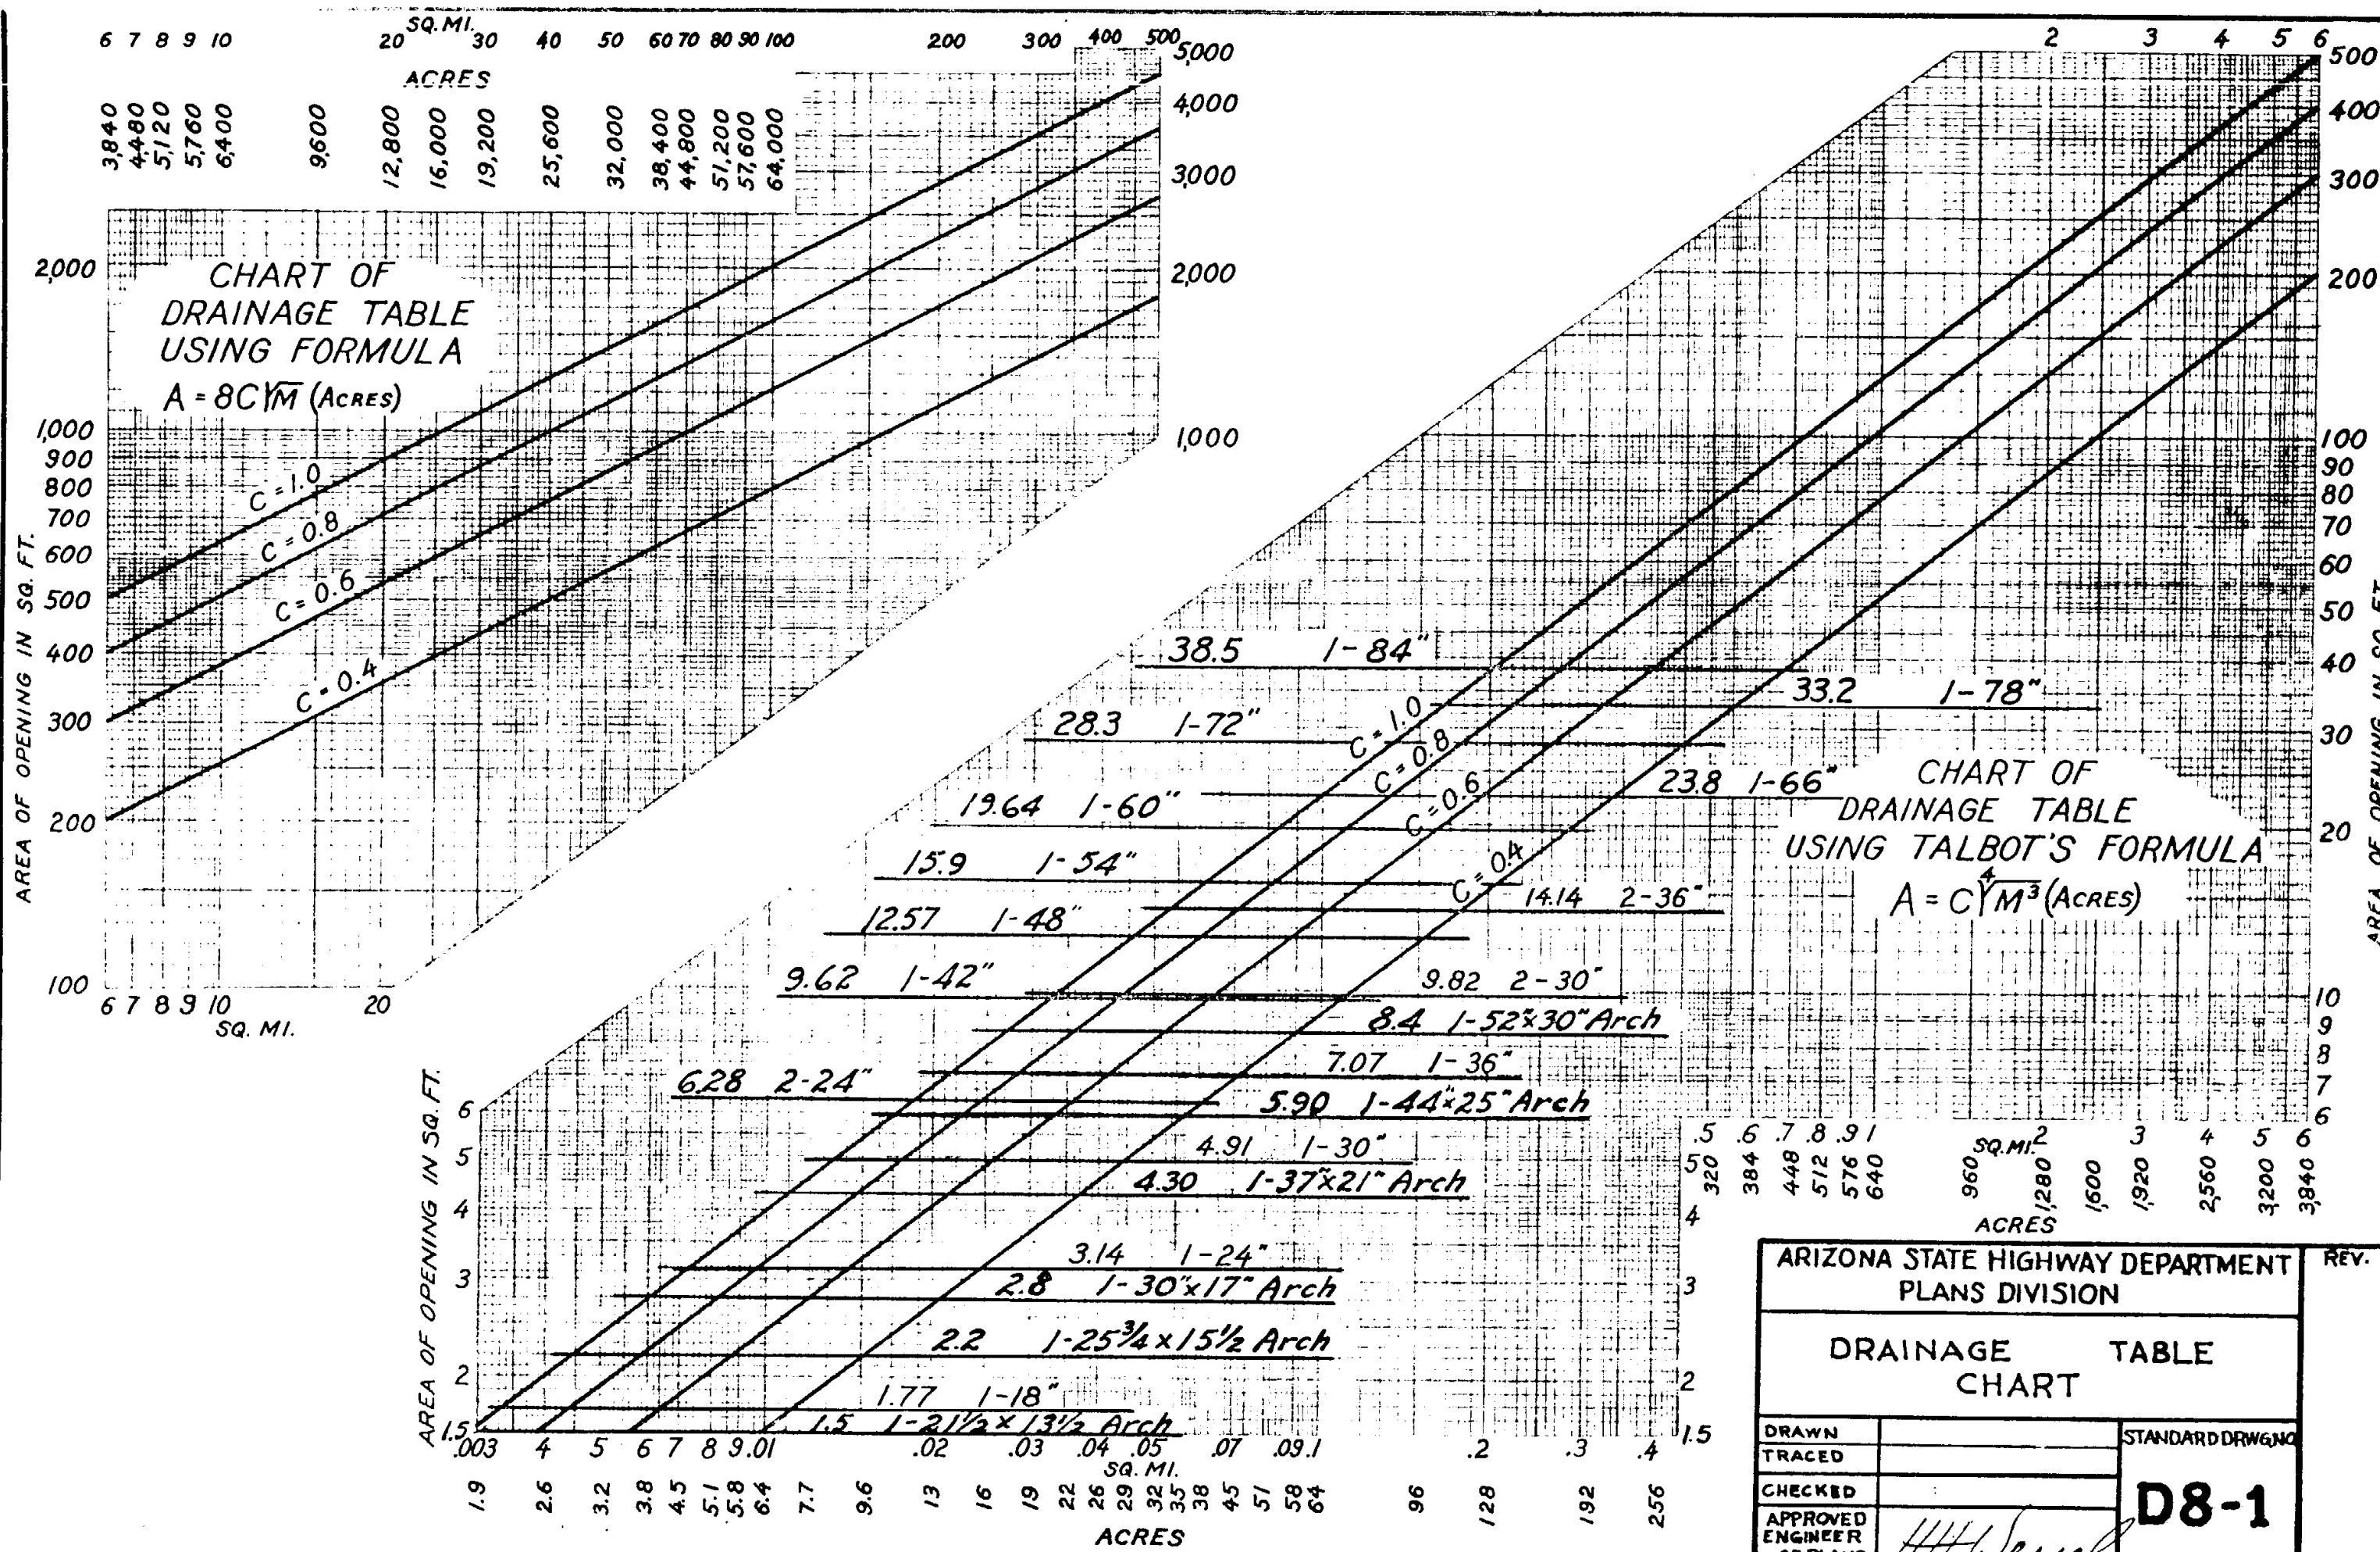

ARIZONA STATE HIGHWAY DEPARTMENT PLANS DIVISION		REV.
DRAINAGE TABLE CHART		
DRAWN TRACED	STANDARD DRAWING NO.	
CHECKED		
APPROVED ENGINEER OF PLANS	<i>H. H. Wessel</i>	D8-1