

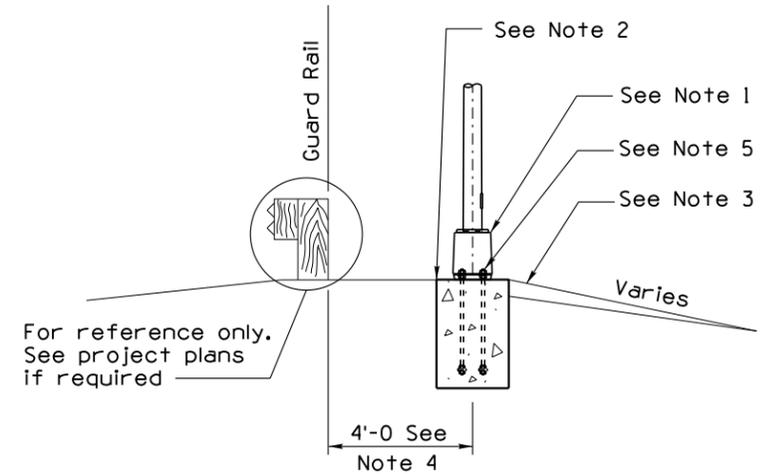
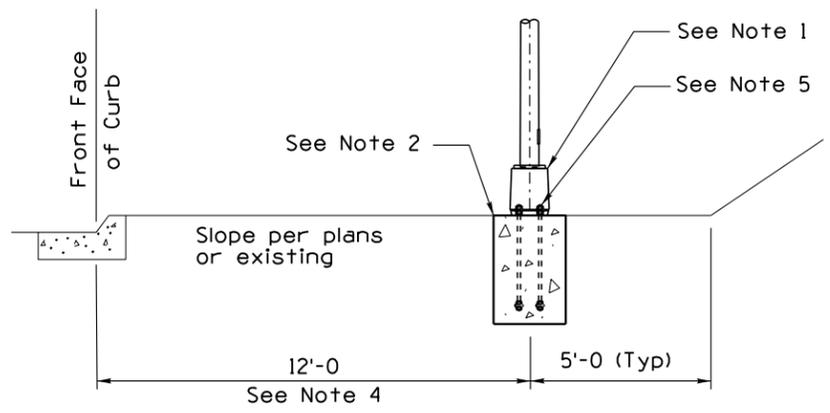


Note to Designer: The information presented in this Standard Drawing has been prepared in accordance with recognized engineering principles and is for general use. It should not be used for specific application without competent professional examination and verification of its suitability and applicability by a licensed professional engineer. Comments within the inner border line shall not be altered.

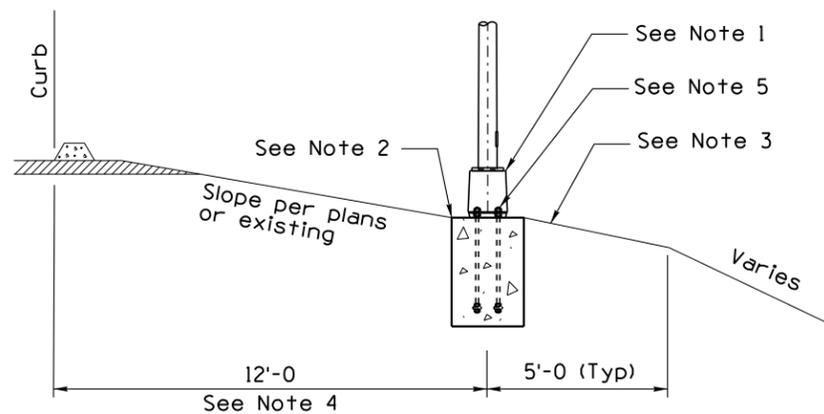

**NOTES:**

1. Use breakaway base if required. See T.S. 5 Series.
2. The top of pole foundations shall be flush with the finished grade. Pull boxes should be set to match the existing slope.
3. Fill around pole foundations a minimum of 10' on three sides with compacted backfill or as directed by the Engineer.
4. Pole offset should comply with the AASHTO Roadside Design Guide. See pole schedule and plans for actual offset.
5. Anchor bolt projection shall be 3/2" or less if the pole is used with a breakaway base.
6. Maximum grade requirements apply if pole is equipped with a breakaway base.

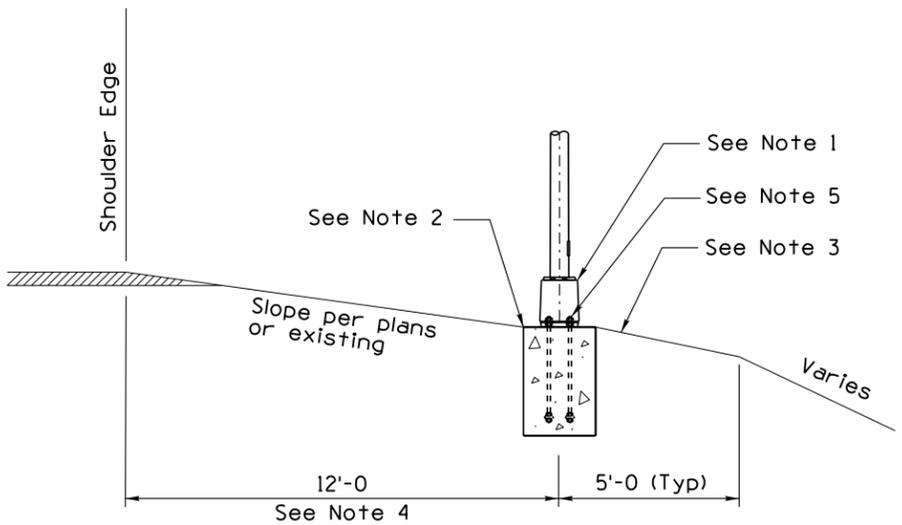

PRIOR DISTRIBUTION DATE

STANDARDS ENGINEER <b>A. ALZUBI</b>	ARIZONA DEPARTMENT OF TRANSPORTATION INFRASTRUCTURE DELIVERY AND OPERATIONS DIVISION <b>TRAFFIC SIGNAL &amp; LIGHTING</b> STANDARD DRAWING		DRAWING NO. T-SL 4.32
RECOMMENDED FOR APPROVAL GROUP MANAGER <b>M. HANNA</b>			
APPROVED	TYPICAL HIGHWAY LIGHTING OFFSETS IN CUT AND FILL SECTIONS		
STANDARDS COMMITTEE APPROVED FOR DISTRIBUTION	04/19 DATE		