



NOTES:

1. See the Specifications for material and construction.
2. Top locking bead may be continuous, located at sides only, or located at corners only.
3. See T.S. 1-8 for typical installation details.
4. Steel reinforcing shall be as shown or an approved alternate reinforcement method must be submitted for approval.
5. All dimensions are nominal.

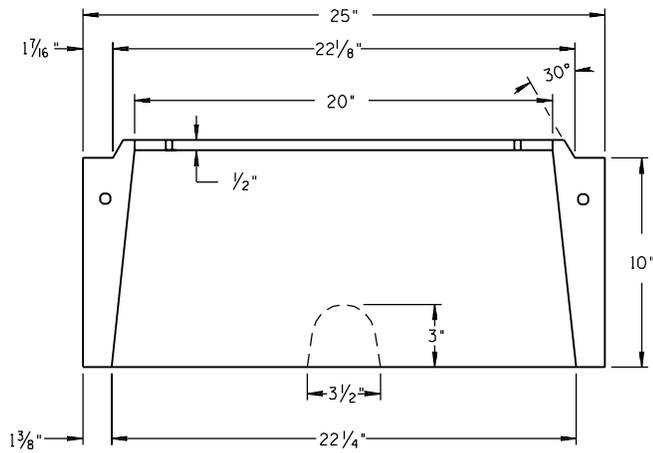

SECTION A-A

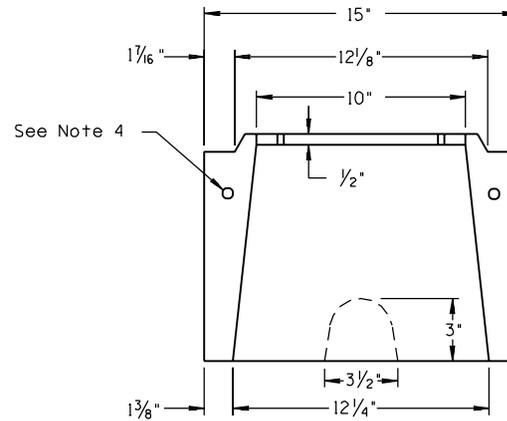

SECTION B-B



PLAN SYMBOL

DESIGN APPROVED	SIGNATURE	ARIZONA DEPT. OF TRANSPORTATION	REV.
APPROVED FOR DISTRIBUTION		INTERMODAL TRANSPORTATION DIVISION	
	ON FILE	TRAFFIC SIGNALS & LIGHTING	
		STANDARD DRAWINGS	
		NO. 5 CONCRETE	DRAWING NO.
		PULL BOX EXTENSION	T.S. 1-2