



NO	DESCRIPTION OF REVISIONS	DATE	MADE BY
1	2010 EDITION		
2			
NO	DESCRIPTION OF REVISIONS	DATE	MADE BY
3		03/10	C. COLE
4			
NO	DESCRIPTION OF REVISIONS	DATE	MADE BY

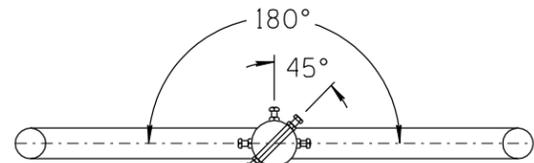


After bracket has been installed on pole tenon, drill $\frac{3}{8}$ " hole through bracket and tenon. Install $\frac{3}{8}$ " x $4\frac{1}{2}$ " hex head cadmium plated bolt, nut and washer.

SECTION A-A

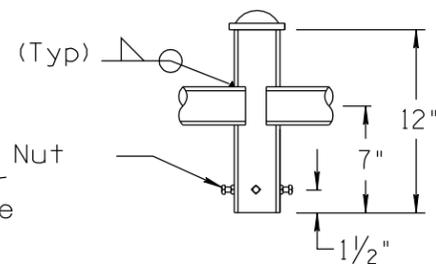


4- $\frac{5}{8}$ " NC SQ Nut
Welded Over
 $\frac{1}{16}$ " Dia Hole
90° Apart


DETAIL "A"

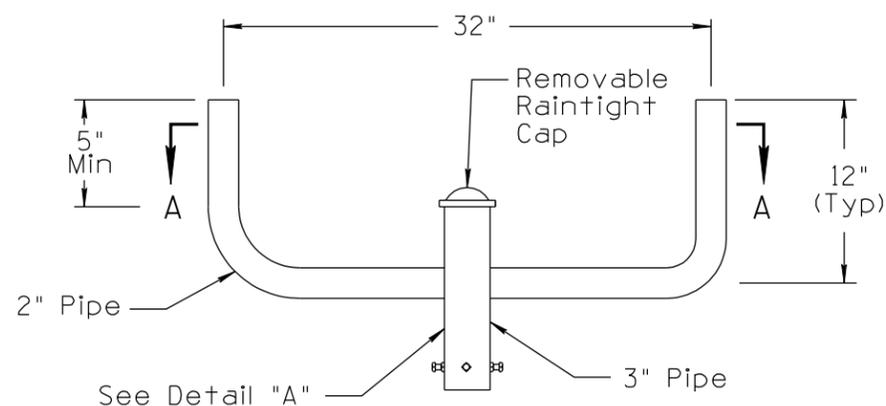

TWIN LUMINAIRE
BRACKET AND SET SCREW DETAIL

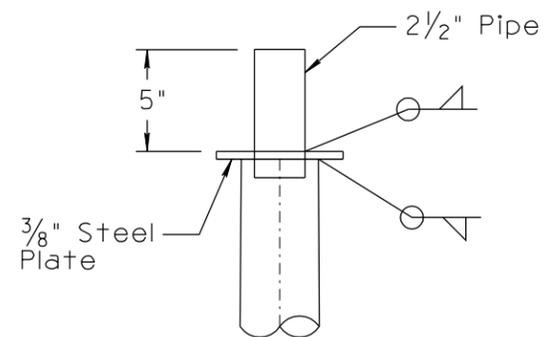

POLE TOP DETAIL

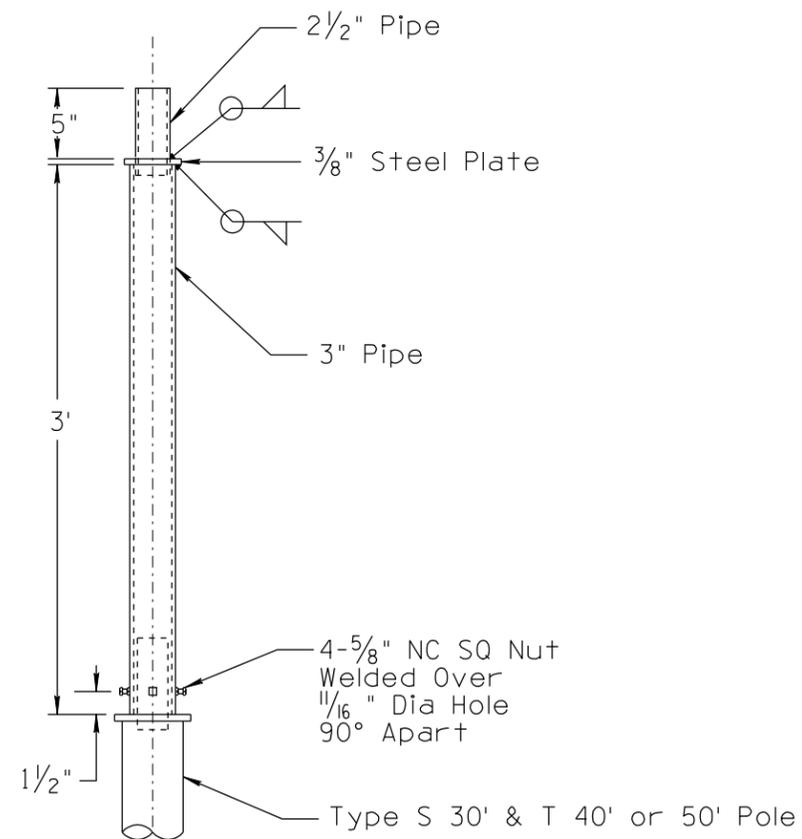

POLE EXTENSION

NOT TO SCALE

DESIGN APPROVED	ARIZONA DEPARTMENT OF TRANSPORTATION INTERMODAL TRANSPORTATION DIVISION TRAFFIC SIGNALS AND LIGHTING STANDARD DRAWINGS	REVISION 03/10
APPROVED FOR DISTRIBUTION		DRAWING NO. T.S. 4-14
	TYPE "S" AND "T" STEEL TWIN LUMINAIRE MOUNTING BRACKET AND EXTENSIONS	SHEET NO. 2 OF 2