

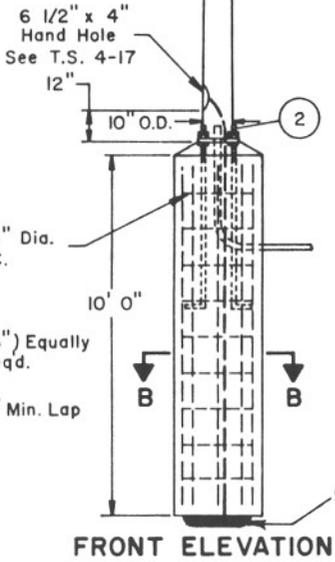
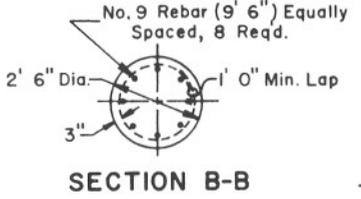
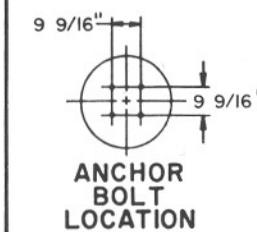


VIEW A-A

SECTION C-C

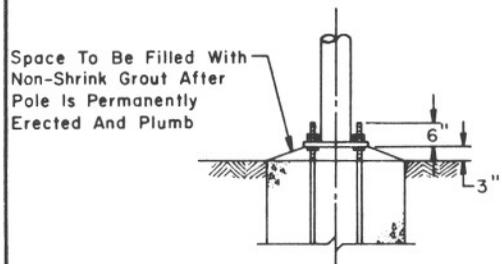

FRONT ELEVATION

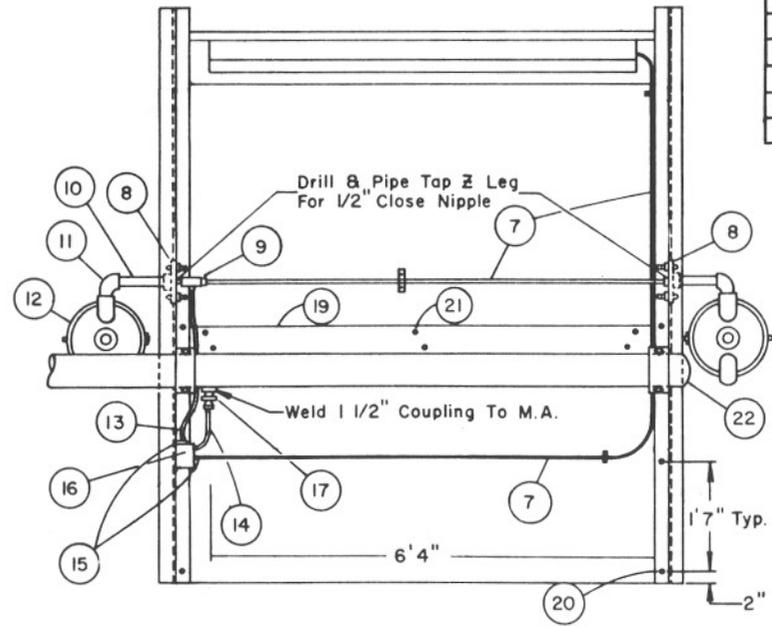


REAR ELEVATION SIGN

LIST OF MATERIALS

| Item | Qty | Description  |
|------|-----|--|
| 1    | 1   | 3 Ga. 10" x 6 3/4" x 23' 0" Tapered Steel Pole (Galv.)   |
| 2    | 4   | 1 1/2" x 72" x 6" Anchor Bolts W/ (3) Hex Nuts & 2 Washers Per Bolt (Galv.)  |
| 3    | 1   | 3 Ga. 6" I.D. x 18' 0" Steel Mast Arm (Galv.)  |
| 4    | 2   | 3/16" x 3" H.S. Steel Clamp  |
| 5    | 2   | 3" x 3" x 3/16" Tube   |
| 6    | 2   | 3 1/16" x 4" x 1/4" Z Support Brake Formed   |
| 7    | 1   | 1/2" Thinwall Conduit W/ Clamps As Required  |
| 8    | 2   | Pole Plate (T.S. 10-3-2) W/ (2) 1/2" x 2" H.S. Bolts & Nuts W/ Lock Washers  |
| 9    | 1   | 1/2" T Condulet  |
| 10   | 2   | 1 1/2" x 14" Nipple  |
| 11   | 2   | 2" Shurlock 90° Elbows (T.S. 10-1-2)   |
| 12   | 2   | 12" Flasher W/ 12" Visor (T.S. 8-1 and T.S. 8-2)   |
| 13   | 1   | 1/2" Flex Conduit W/ Approved Fittings   |
| 14   | 1   | 3/4" Flex Conduit W/ Approved Fittings   |
| 15   | 2   | 3/4" To 1/2" Reducer   |
| 16   | 1   | 3/4 FSCC Box   |
| 17   | 1   | 1 1/2" To 3/4" Reducer   |
| 18   | 1   | 7" x 7" Sign Panel To Be Furnished By Others   |
| 19   | 1   | 2" x 4" (Wood) - Sign Panel Stiffener To Be Located At Junction Of Sign Panel Halves (By Others)   |
| 20   | 12  | 5/16" x 2" RD. Head Bolts & Hex Nuts W/ Washers (By Others)  |
| 21   | 6   | 5/16" x 4" RD. Head Bolts & Hex Nuts W/ Washers (By Others)  |
| 22   | 2   | Removable Cap Size As Required   |
| 23   | 1   | 6-2 Tube Fluorescent Lighting Fixture W/ Internal Ballast, (See T.S. 13-1 For Design And Installation Of Fixture)                            |
| 24   | 2   | 4" x 4" x 3/8" x 1 1/2" Angle  |
| 25   | 2   | 1 5/8" x 15/8" -12 Ga. Continuous Slot Channel with 9/16" Holes Spaced 1 7/8" Apart. Channel shall be Galvanized to Conform with ASTM. A-123 |

NOTES:

- For Installation Procedures See Specifications.
- Legend On Sign Shall Be As Shown Unless Otherwise Specified.
- A 25' coil of No. 4 AWG bare copper conductor shall be installed before the concrete is poured and connected to pole grounding screw in the hand hole.

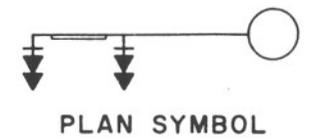

PLAN SYMBOL

|   |   |                          |
|---|---|--------------------------|
| DESIGN APPROVED<br><i>Charlie Brown</i><br>7/24/85    | STATE OF ARIZONA<br>DEPARTMENT OF TRANSPORTATION<br>DIVISION OF HIGHWAYS<br>STANDARD DRAWINGS | REV.                     |
| APPROVED FOR DISTRIBUTION<br><i>R. J. [Signature]</i> | OVERHEAD FLASHER<br>DETAIL  | DRAWING NO.<br>T.S. 12-2 |