



SECTION B-B
(Pole Removed)

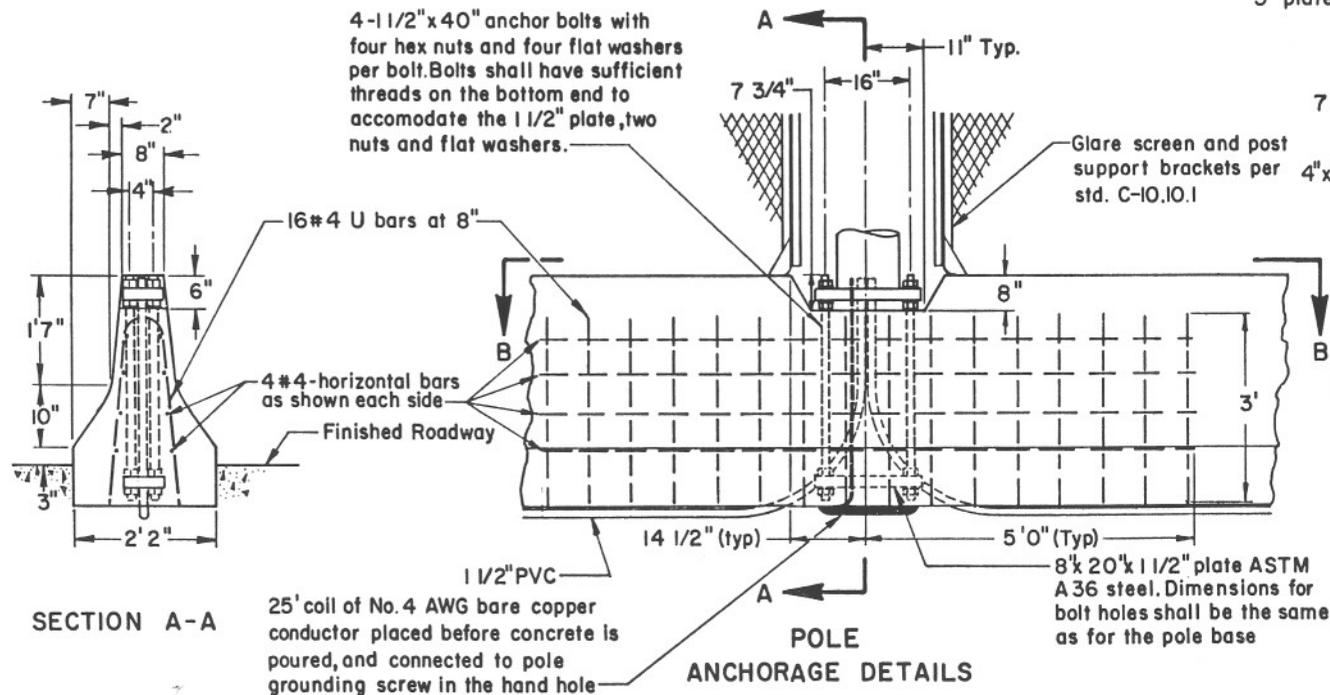

SECTION A-A

NOTES:

1. The pole shall be fully galvanized in accordance with ASTM A 123.
2. The pole shaft shall be fabricated from sheet steel which meets or exceeds ASTM 572 GR.42 55,000 PSI minimum strength requirements.
3. A key and slot arrangement or some other acceptable device shall be provided to insure that the mast arms are located 90° from the longitudinal axis of the pole base plate as the two pole sections are assembled.
4. Conductors hanging within the pole shall be supported from the top of the pole by an approved cable hanger.
5. Anchor bolts shall be fabricated from steel steel which meets or exceeds ASTM A 36 minimum strength requirements. The anchor bolts, washers, and nuts shall be fully galvanized.
6. The area between the bottom of the pole base plate and the median barrier shall be filled with a non-shrink grout material.

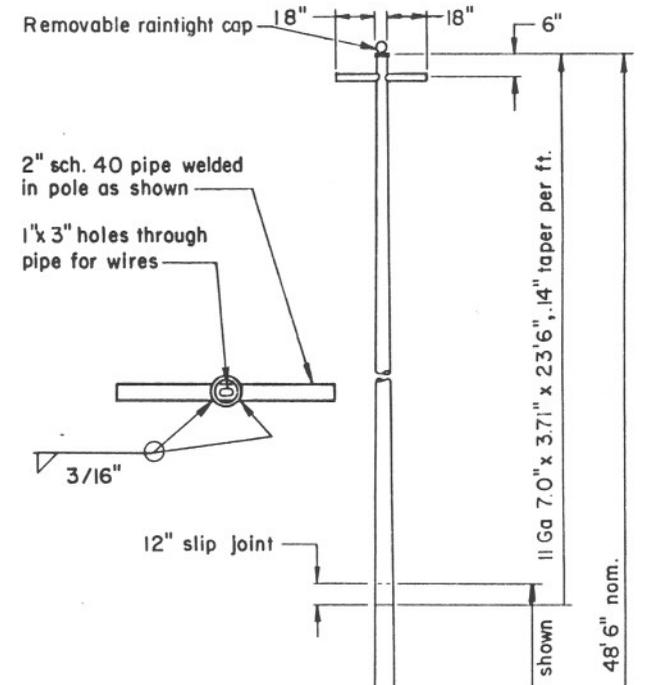

POLE BASE

POLE DETAILS

DESIGN APPROVED <i>Carli Brown</i> 7/24/65	STATE OF ARIZONA DEPARTMENT OF TRANSPORTATION DIVISION OF HIGHWAYS STANDARD DRAWINGS	REV. 10-6-86
APPROVED FOR DISTRIBUTION <i>James Adams</i>	TYPE "U" POLE AND ANCHORAGE DETAIL	DRAWING NO. T.S. 4-16