



PLAN SYMBOLS

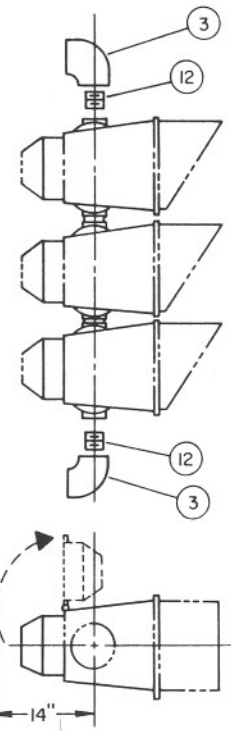

PROGRAMMED VISIBILITY SIGNAL

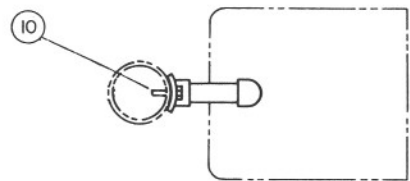

ILLUMINATED MESSAGE, PEDESTRIAN OR TRAFFIC SIGNAL

LIST OF MATERIALS

Itm.	Qu.	Description
1	1	Pole Plate (T.S. 10-3-2)
2	2	1 1/2" Pipe Nipple, See Table Below
3	1	90° Elbow
4	1	Flat Washer
5	1	Neoprene Washer
6	2	Lock Nipple, 1 1/8" Long
7	1	Signal Housing, See Plans
8	1	90° Elbow With Locking Device (T.S. 10-1-2)
9	1	Pole Plate With Wire Guide (T.S. 10-3-1)
10	4	1/2" x 2" Galvanized Steel Bolt, 13 UNC With Flat Washer And Lock Washer
11	1	Lock Ring (T.S. 10-1-5) Used Only When Item 7 Contains No Locking Teeth
12	2	Close Nipple

NOTES:

1. For Pole Drilling Details See T.S. 4-18.

ITEM 2	
NIPPLE LENGTH	SIGNAL TYPE
6"	Standard Signal Comb.
12"	Illuminated Message
16"	Programmed Signal
12"	Pedestrian Signal

DESIGN APPROVED <i>Charles Brown</i> 7/24/85	STATE OF ARIZONA DEPARTMENT OF TRANSPORTATION DIVISION OF HIGHWAYS STANDARD DRAWINGS	REV.
APPROVED FOR DISTRIBUTION <i>[Signature]</i>	TYPE XI MOUNTING ASSEMBLY	DRAWING NO. T.S. 9-9