





NO	DESCRIPTION OF REVISIONS	DATE	MADE BY
1	RE-ISSUE	2/02	L. LOPEZ
2	TYPE "C" RPMS @ 20 FT. SPACING ON GORE STRIPES	5/03	L. LOPEZ
3	GORE DETAIL CORRECTION & ADDED TAPE CALLOUT AND NOTE	6/03	L. LOPEZ
4	REVISED NOTE #4	1/10	L. LOPEZ

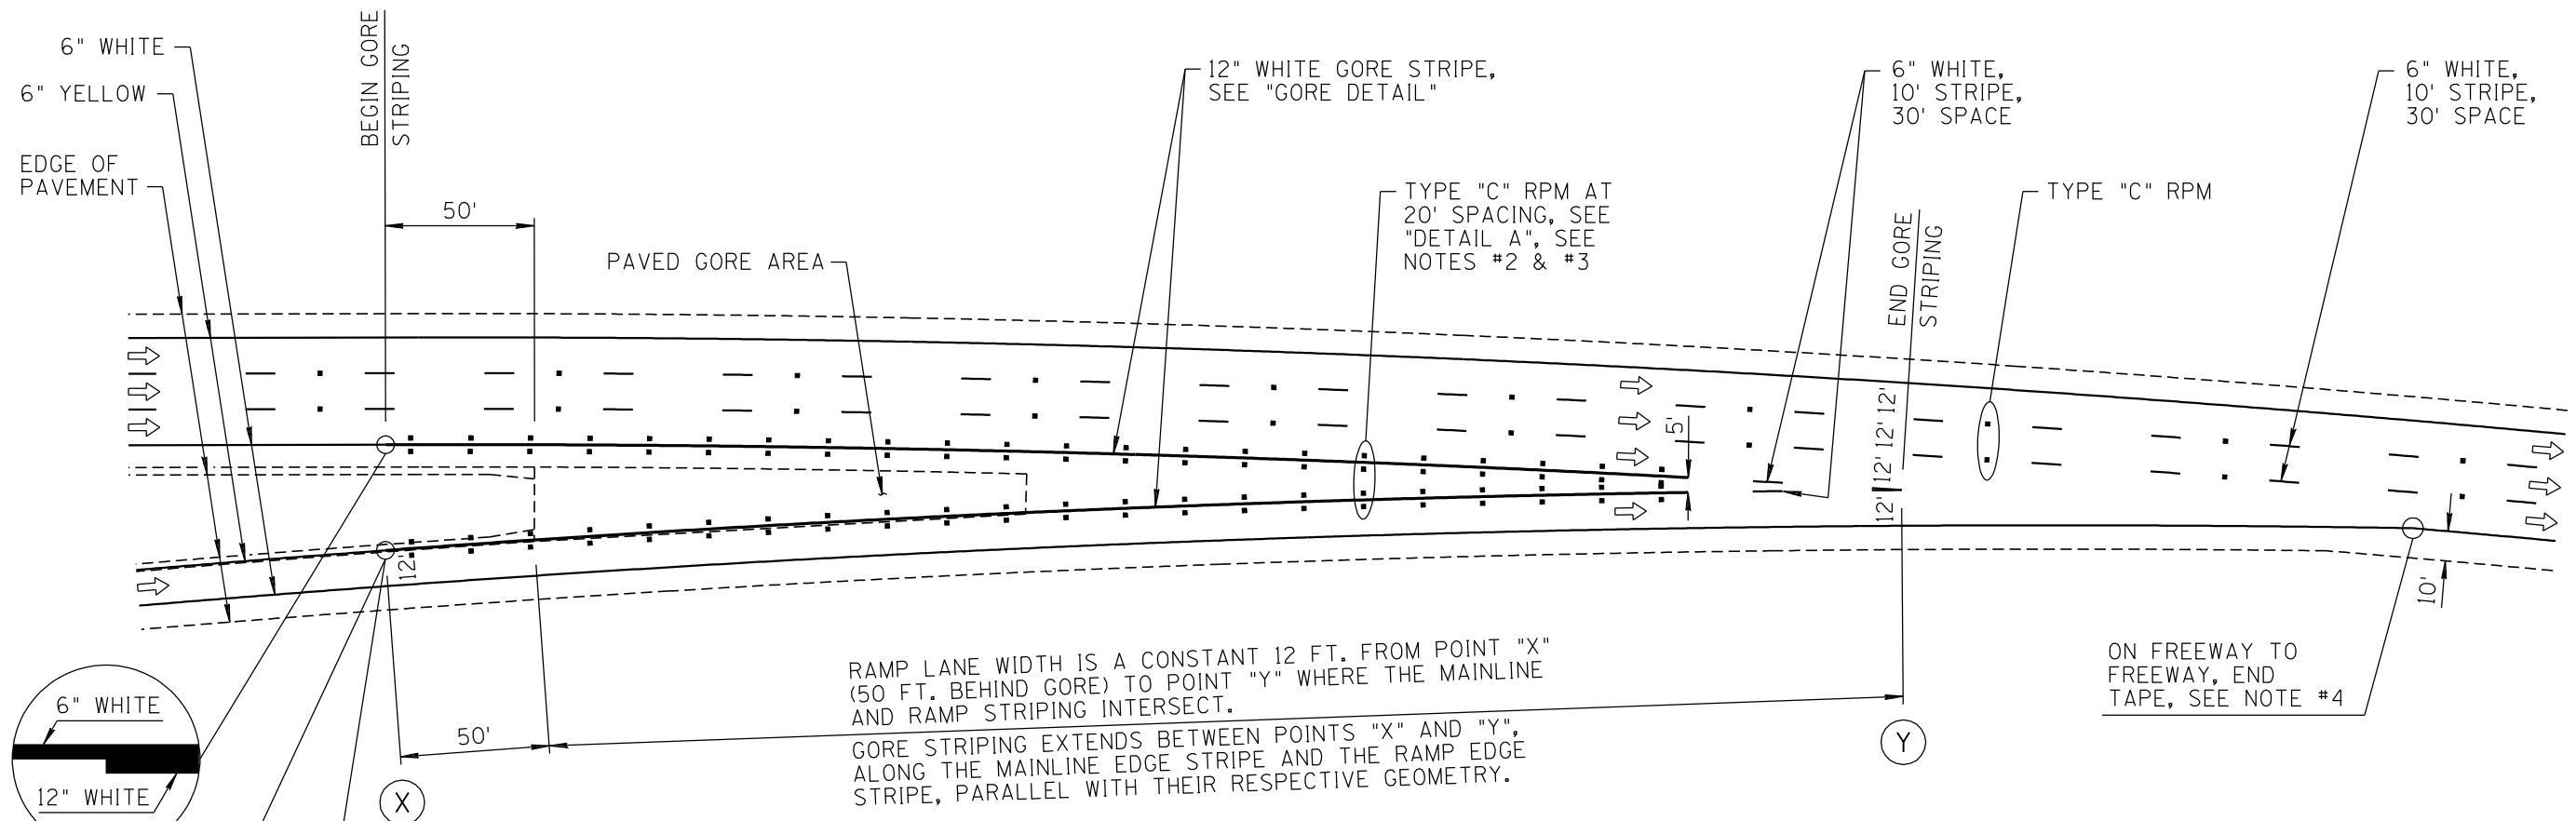


ON FREEWAY TO FREEWAY, END TAPE, SEE NOTE #4

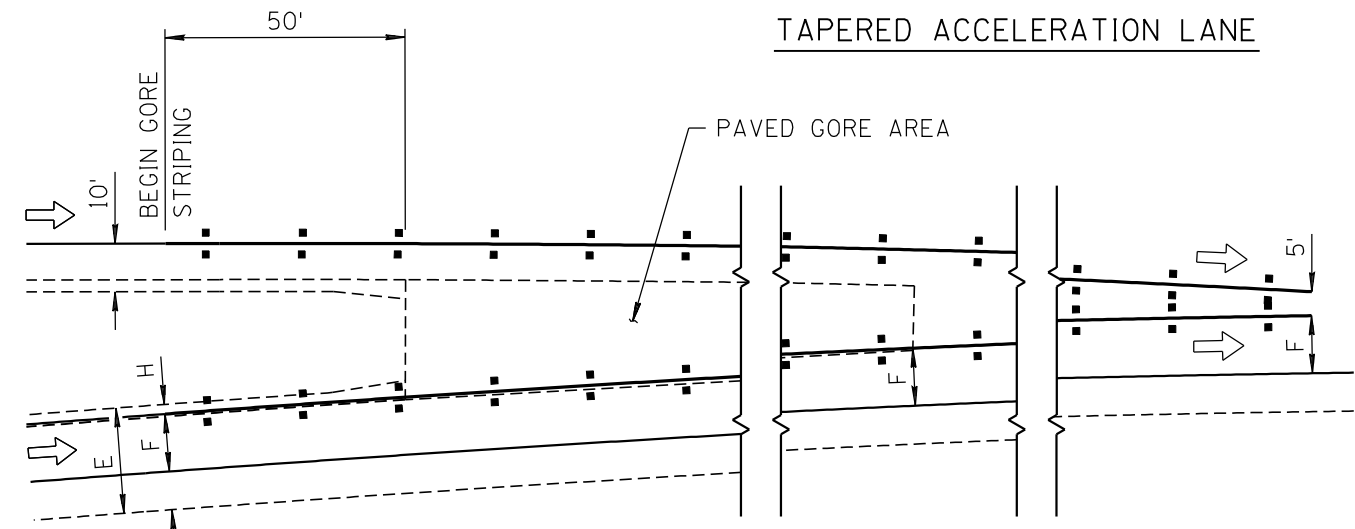

RAMP WIDTH E	LANE WIDTH F	RIGHT SHOULDER G	LEFT SHOULDER H
22 FT	12 FT	8 FT	2 FT
28 FT	12 FT	10 FT	6 FT
36 FT	(2)/12 FT	8 FT	4 FT
40 FT	(2)/12 FT	10 FT	6 FT

- NOTES:
- DIMENSIONS ARE MEASURED TO THE CENTER OF ALL STRIPING UNLESS NOTED OTHERWISE.
 - RPM'S SHOULD BE INSTALLED ON ELEVATIONS BELOW 4000 FT.
 - TYPE "C" REFLECTIVE PAVEMENT MARKERS ARE TO BE PLACED AT 20 FT. SPACING, AND OFFSET 2 INCHES FROM THE EDGE OF THE GORE STRIPES.
 - UNLESS OTHERWISE SHOWN ON THE PROJECT PLANS, ALL FREEWAY MARKINGS STATEWIDE SHALL USE DURABLE TAPE FOR LANE LINES, EXIT GORES, HOV LANE SYMBOLS AND FREEWAY TO FREEWAY RAMP. WHEN USED ABOVE ELEVATIONS OF 4,000 FT., DURABLE TAPE SHALL BE INSTALLED IN A GROOVE PER TAPE MANUFACTURER'S RECOMMENDATIONS.

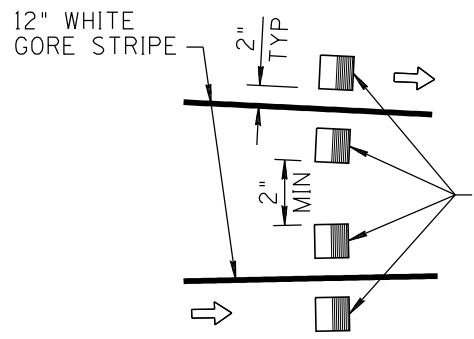

GORE DETAIL
SEE RAMP LANE WIDTH TABLE

DETAIL A
SEE NOTES #2 & #3

NOT TO SCALE

DESIGN APPROVED	ARIZONA DEPARTMENT OF TRANSPORTATION INTERMODAL TRANSPORTATION DIVISION TRAFFIC SIGNING & MARKING STANDARD DRAWINGS	REVISION	1/10
APPROVED FOR DISTRIBUTION		DRAWING NO.	M-15
PAVEMENT MARKINGS FOR FREEWAY ENTRANCE RAMP TAPERED ACCELERATION LANE		SHEET NO.	1 OF 3