

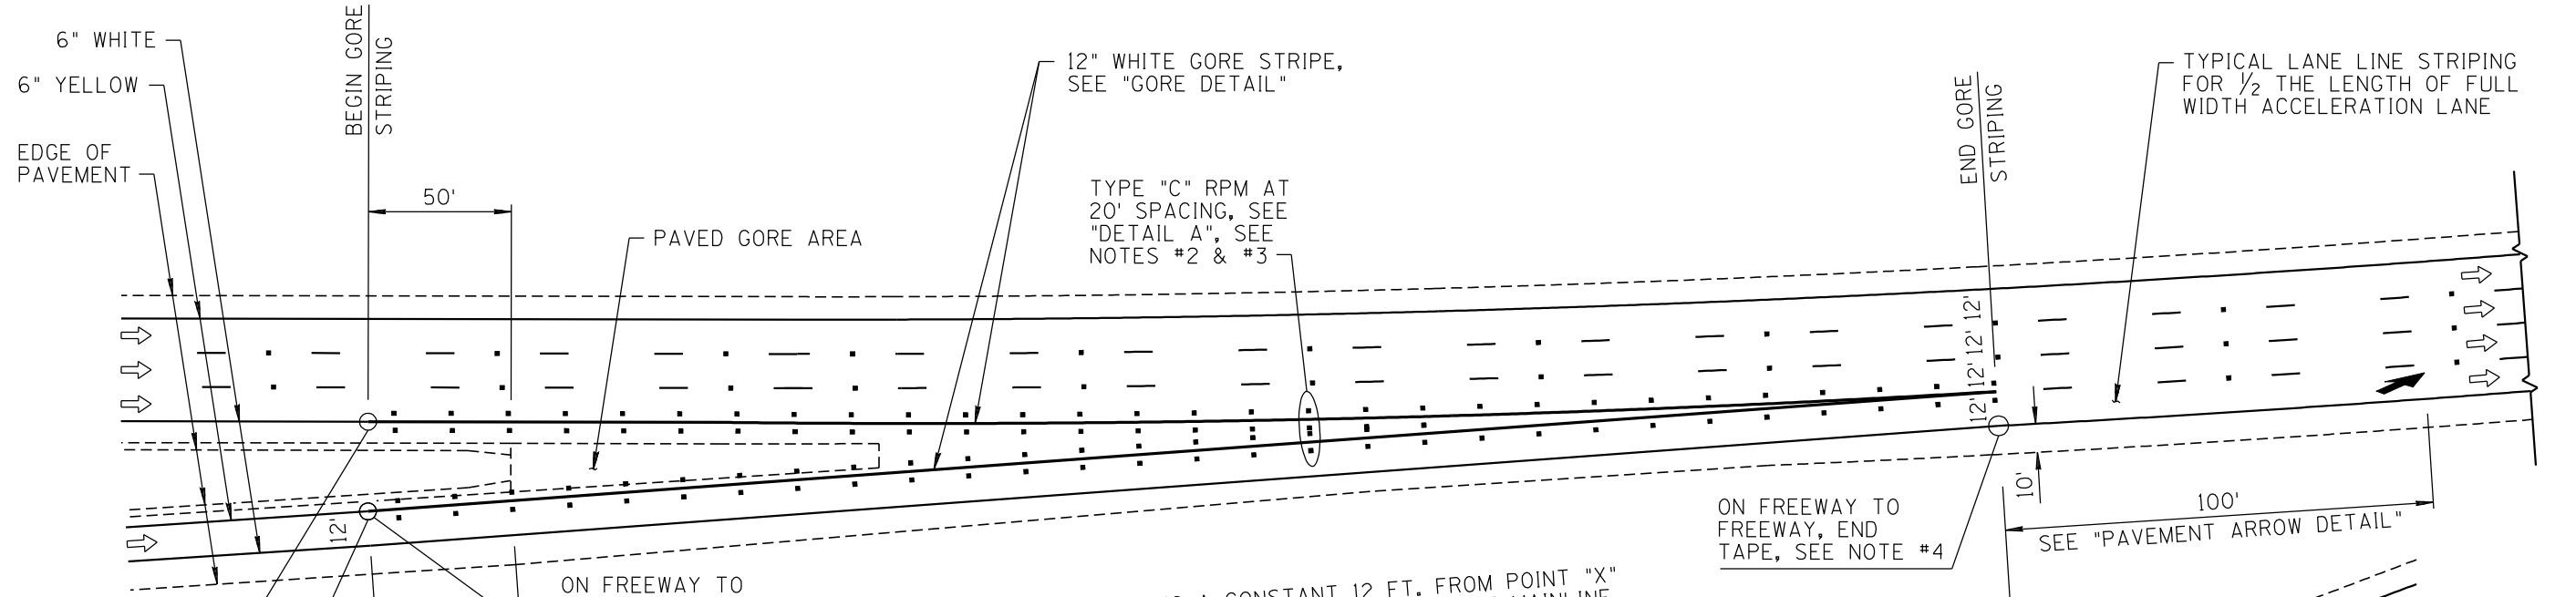


NO	DESCRIPTION OF REVISIONS	MADE BY	DATE
1	RE-ISSUE	L. LOPEZ	2/02
2	TYPE "C" RPM'S @ 20 FT. SPACING ON GORE STRIPES	L. LOPEZ	5/03
3	ADDED TAPE CALLOUT AND SPECIAL PROVISION NOTE	L. LOPEZ	6/03
4			

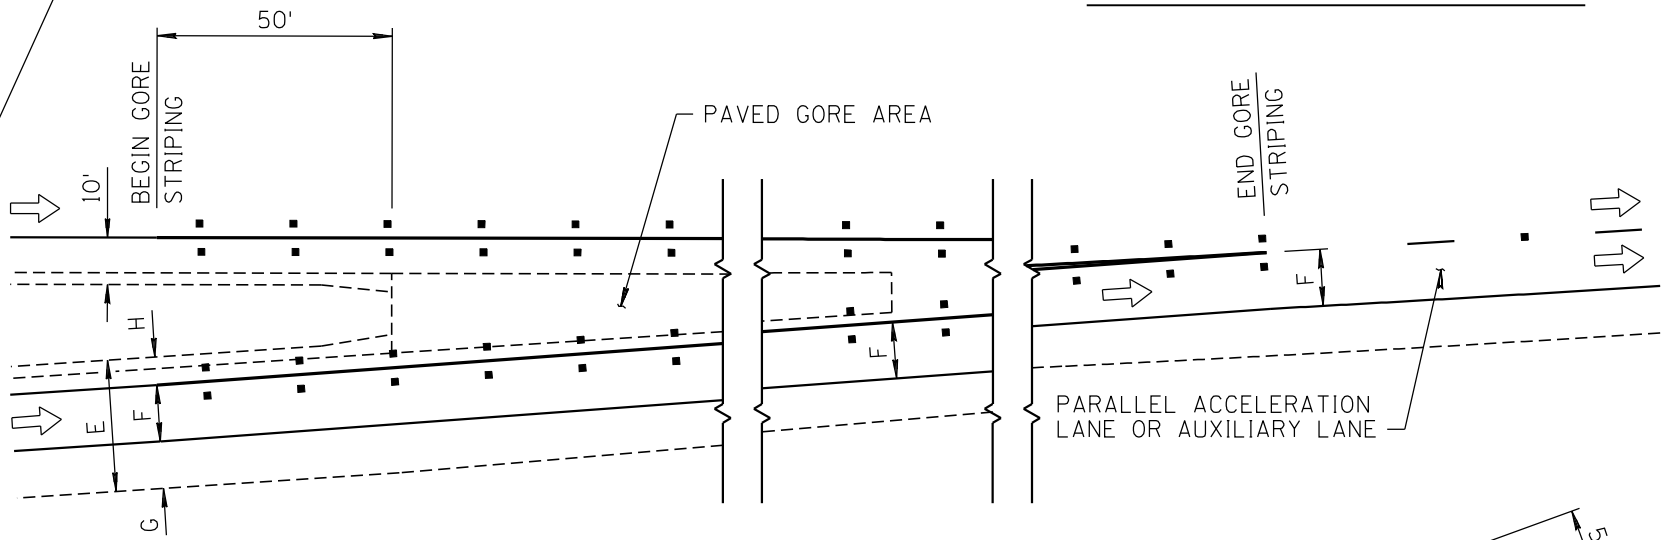


RAMP LANE WIDTH IS A CONSTANT 12 FT. FROM POINT "X" (50 FT. BEHIND GORE) TO POINT "Y" WHERE THE MAINLINE AND RAMP STRIPING INTERSECT. GORE STRIPING EXTENDS BETWEEN POINTS "X" AND "Y", ALONG THE MAINLINE EDGE STRIPE AND THE RAMP EDGE STRIPE, PARALLEL WITH THEIR RESPECTIVE GEOMETRY.

PARALLEL ACCELERATION LANE

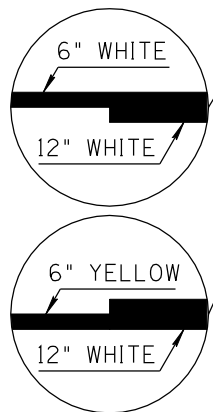


RAMP WIDTH E	LANE WIDTH F	RIGHT SHOULDER G	LEFT SHOULDER H
22 FT	12 FT	8 FT	2 FT
28 FT	12 FT	10 FT	6 FT
36 FT	(2)/12 FT	8 FT	4 FT
40 FT	(2)/12 FT	10 FT	6 FT

- NOTES:**
- DIMENSIONS ARE MEASURED TO THE CENTER OF ALL STRIPING UNLESS NOTED OTHERWISE.
 - RPM'S SHOULD BE INSTALLED ON ELEVATIONS BELOW 4000 FT.
 - TYPE "C" REFLECTIVE PAVEMENT MARKERS ARE TO BE PLACED AT 20 FT. SPACING, AND OFFSET 2 INCHES FROM THE EDGE OF THE GORE STRIPES.
 - ALL FREEWAY TO FREEWAY RAMP PAVEMENT MARKINGS UNDER 4000 FT. ELEVATION SHOULD BE DURABLE TAPE (MANUFACTURE'S PRODUCTS DEFINED IN SPECIAL PROVISIONS). LANE WIDTHS ON FREEWAY TO FREEWAY RAMP SHALL BE 12 FT.

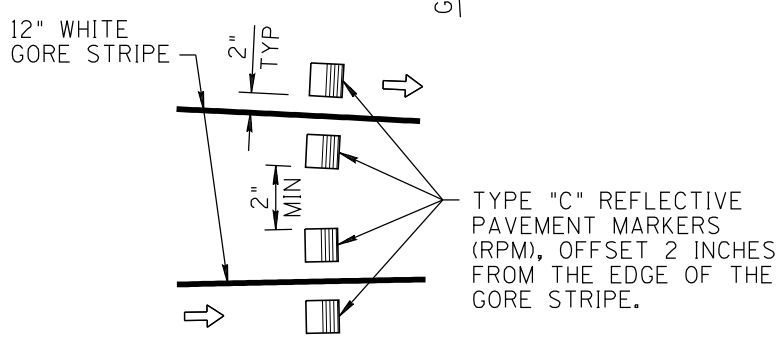

DETAIL A
SEE NOTES #2 & #3

GORE DETAIL
SEE RAMP LANE WIDTH TABLE

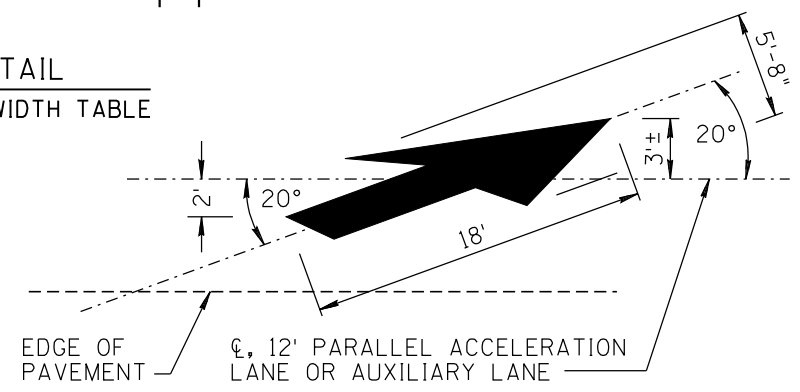

PAVEMENT ARROW DETAIL
SEE STD DRWG M-10

DESIGN APPROVED APPROVED FOR DISTRIBUTION	ARIZONA DEPARTMENT OF TRANSPORTATION INTERMODAL TRANSPORTATION DIVISION STANDARD DRAWINGS	REV. 6/03
	PAVEMENT MARKING FOR FREEWAY ENTRANCE RAMP PARALLEL ACCELERATION LANE	DRAWING NO. M-15