



NO	DESCRIPTION OF REVISIONS	MADE BY	DATE
1	RE-ISSUE	L. LOPEZ	2/02
2			
3			
4			


* WHEN SIGN IS 30' OR MORE FROM EDGE OF PAVED SHOULDER, THE 7'-0" SHOULDER CLEAR MAY BE REDUCED TO 5'-0" MIN.

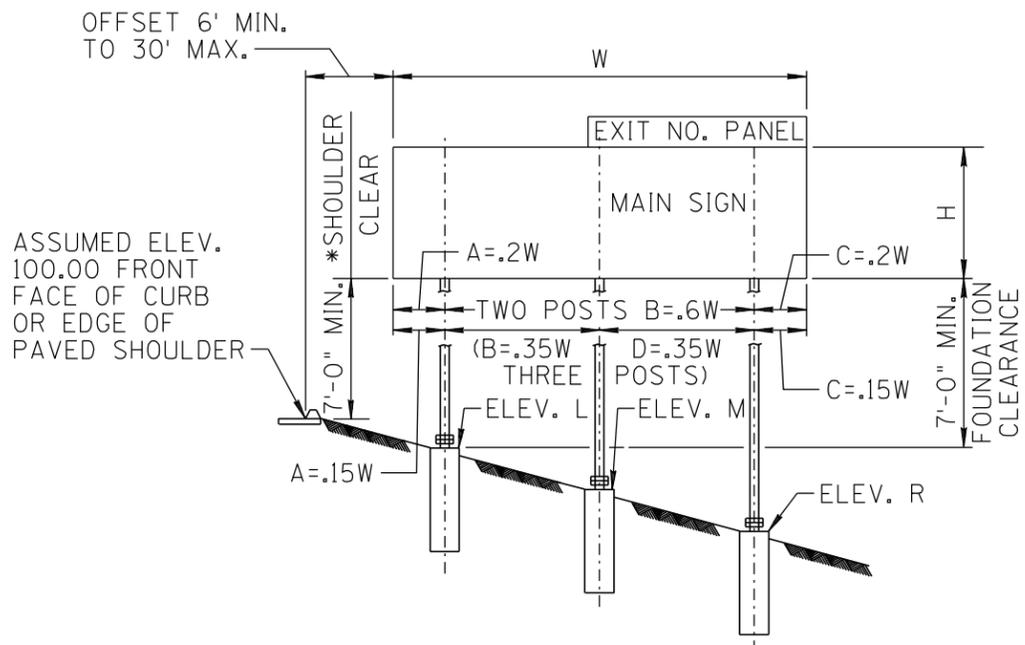


GUIDE SIGN
INSTALLED ON SHOULDER

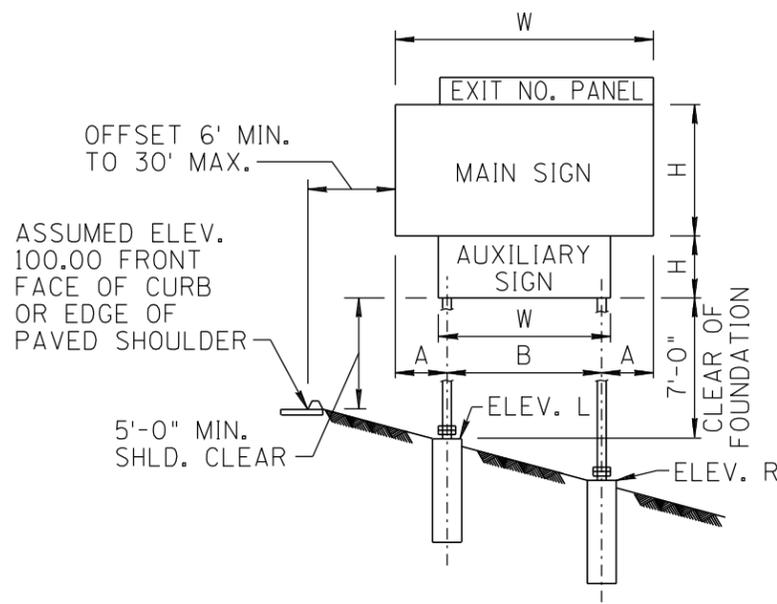


GUIDE SIGN WITH AUXILIARY SIGN
INSTALLED ON SHOULDER

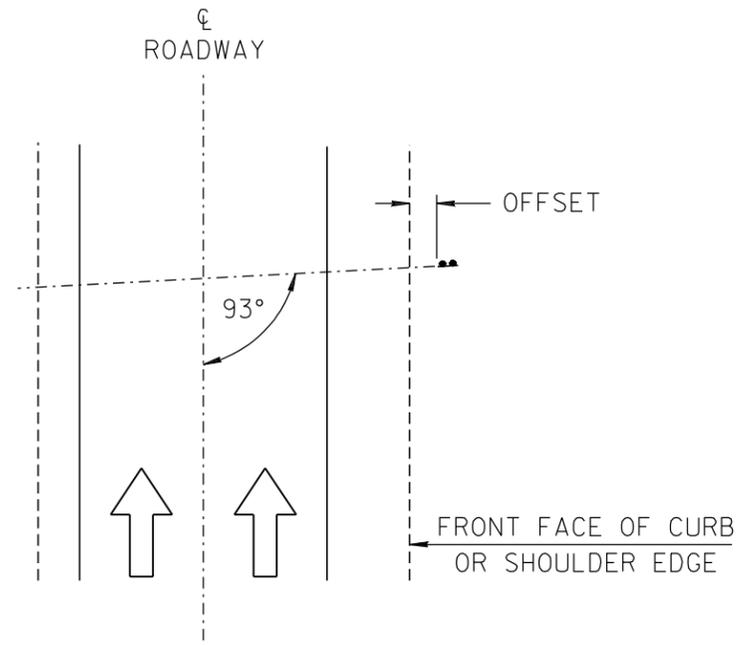


TYPICAL SIGN INSTALLATION
ON SHOULDER

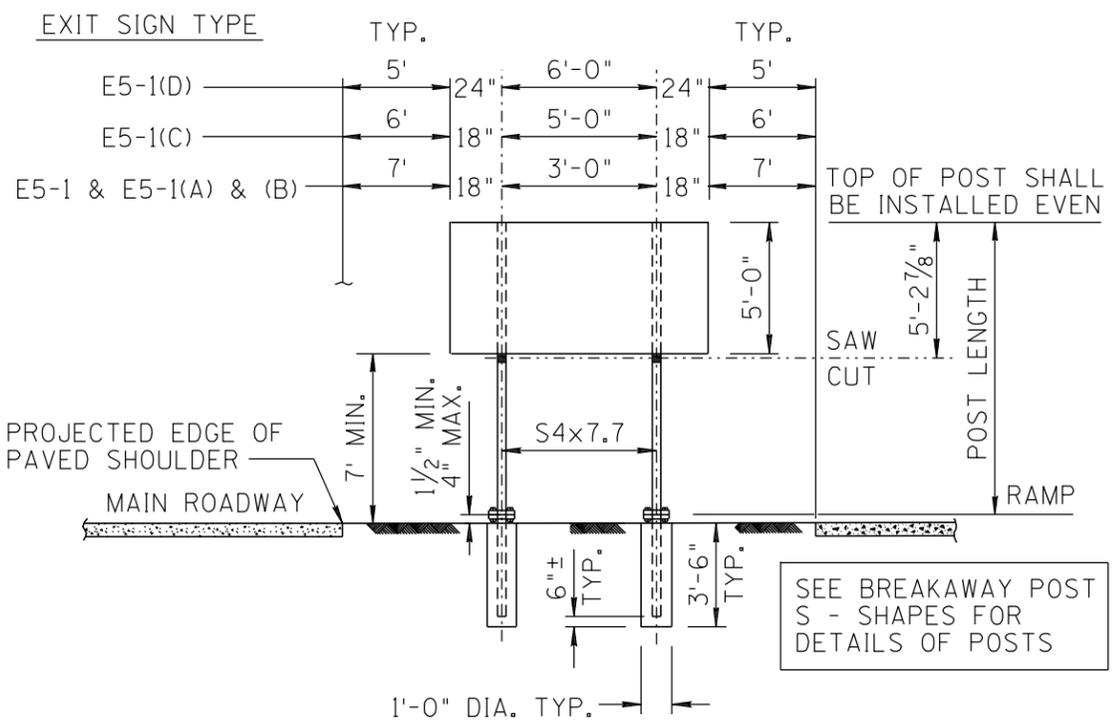

TYPICAL EXIT GORE SIGN

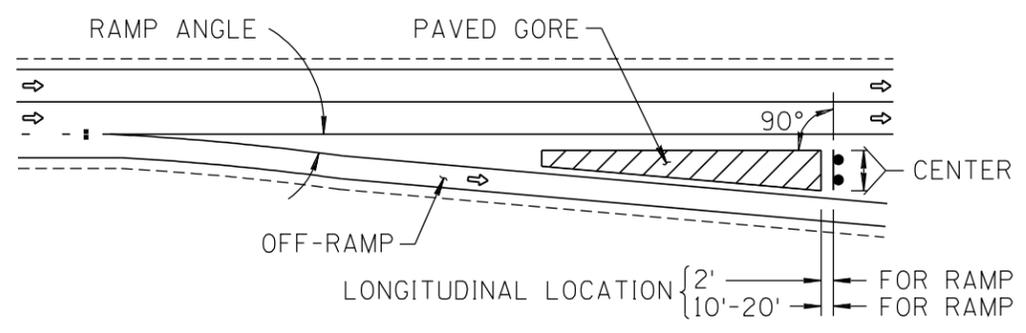

EXIT GORE SIGN LOCATION
THE LOCATION MAY BE SHIFTED BY THE ENGINEER TO SECURE A MORE DESIRABLE LOCATION.

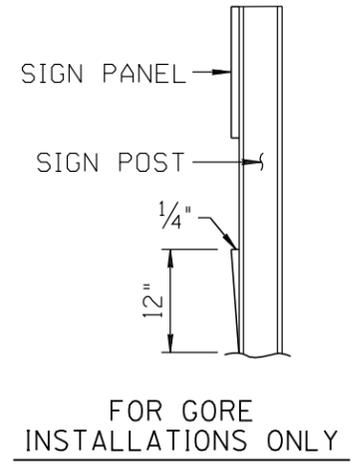

FOR GORE
INSTALLATIONS ONLY

SEE BREAKAWAY POST
S - SHAPES FOR
DETAILS OF POSTS

DESIGN APPROVED	ARIZONA DEPARTMENT OF TRANSPORTATION INTERMODAL TRANSPORTATION DIVISION STANDARD DRAWINGS	REV. 2/02
APPROVED FOR DISTRIBUTION ARCHIVED	OFFSETS, CLEARANCES AND MOUNTING DETAILS FOR GUIDE SIGNS AND BREAKAWAY POST INSTALLATION	DRAWING NO. S-3