




TYPICAL CROSS-SECTION

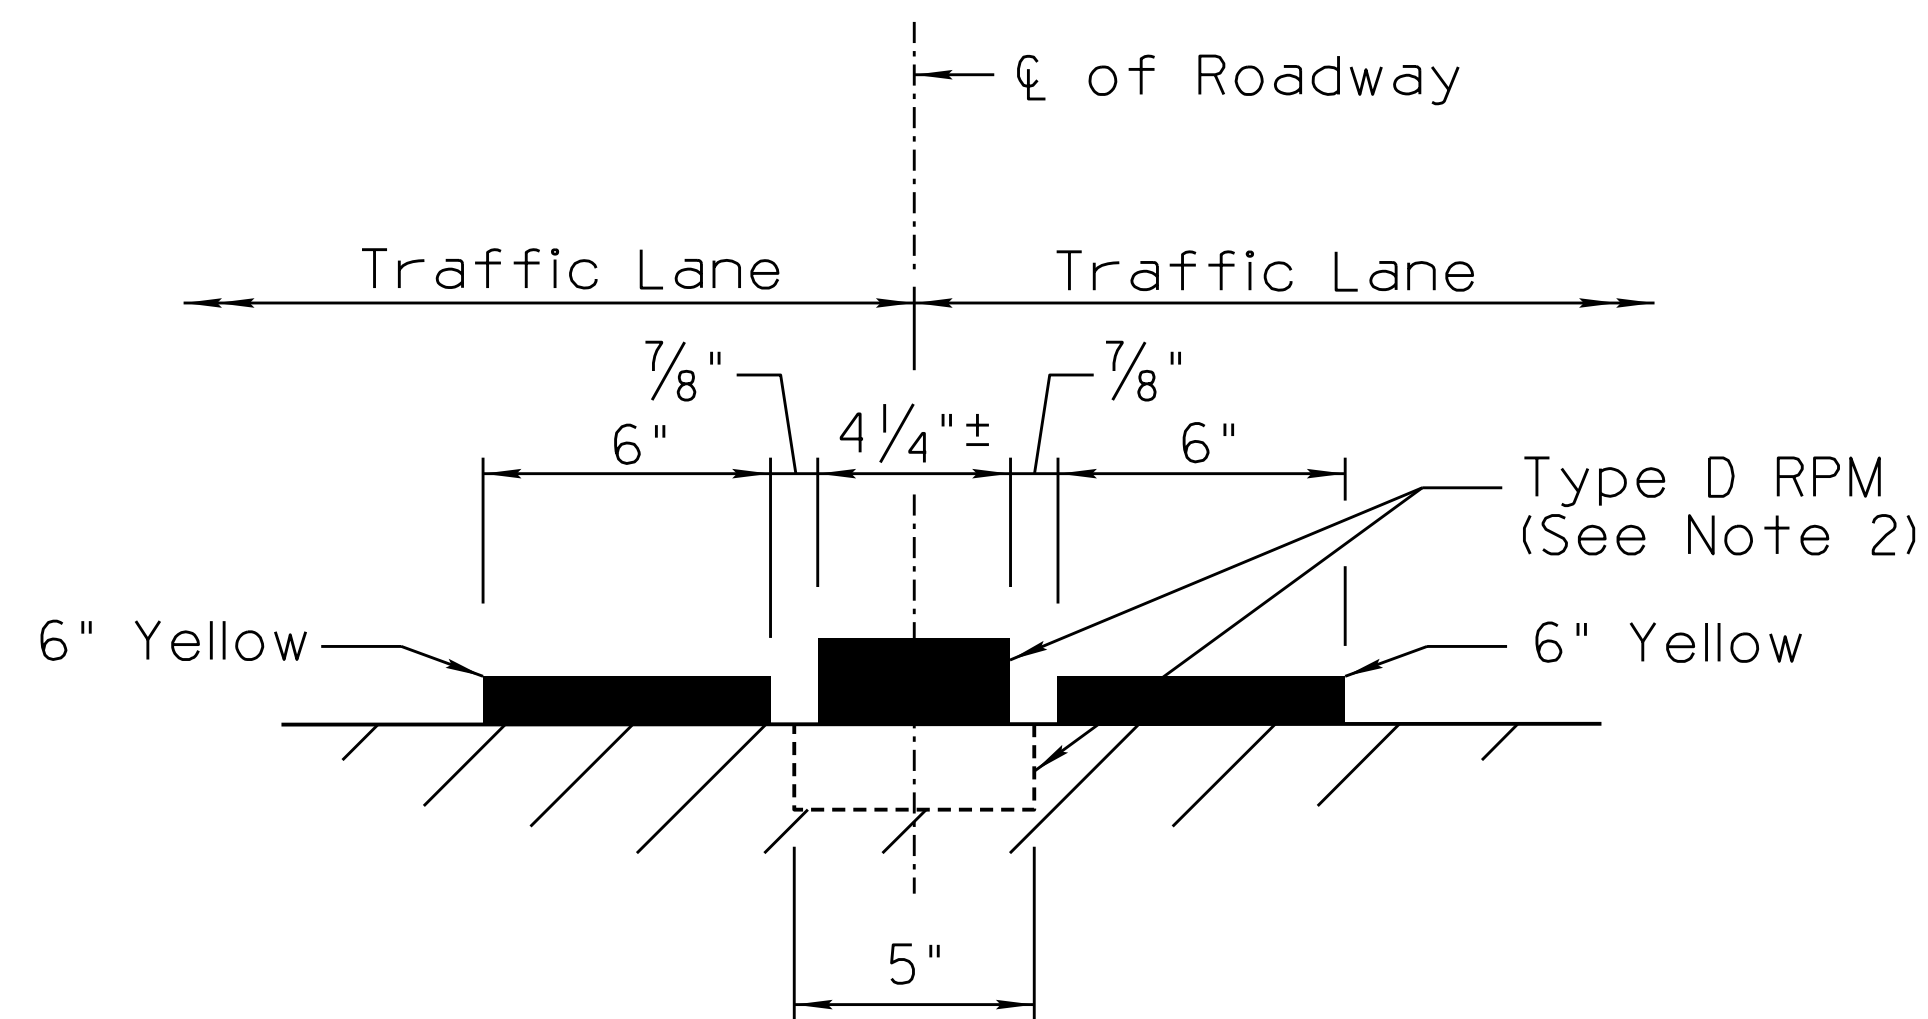

PLACEMENT DETAIL ①

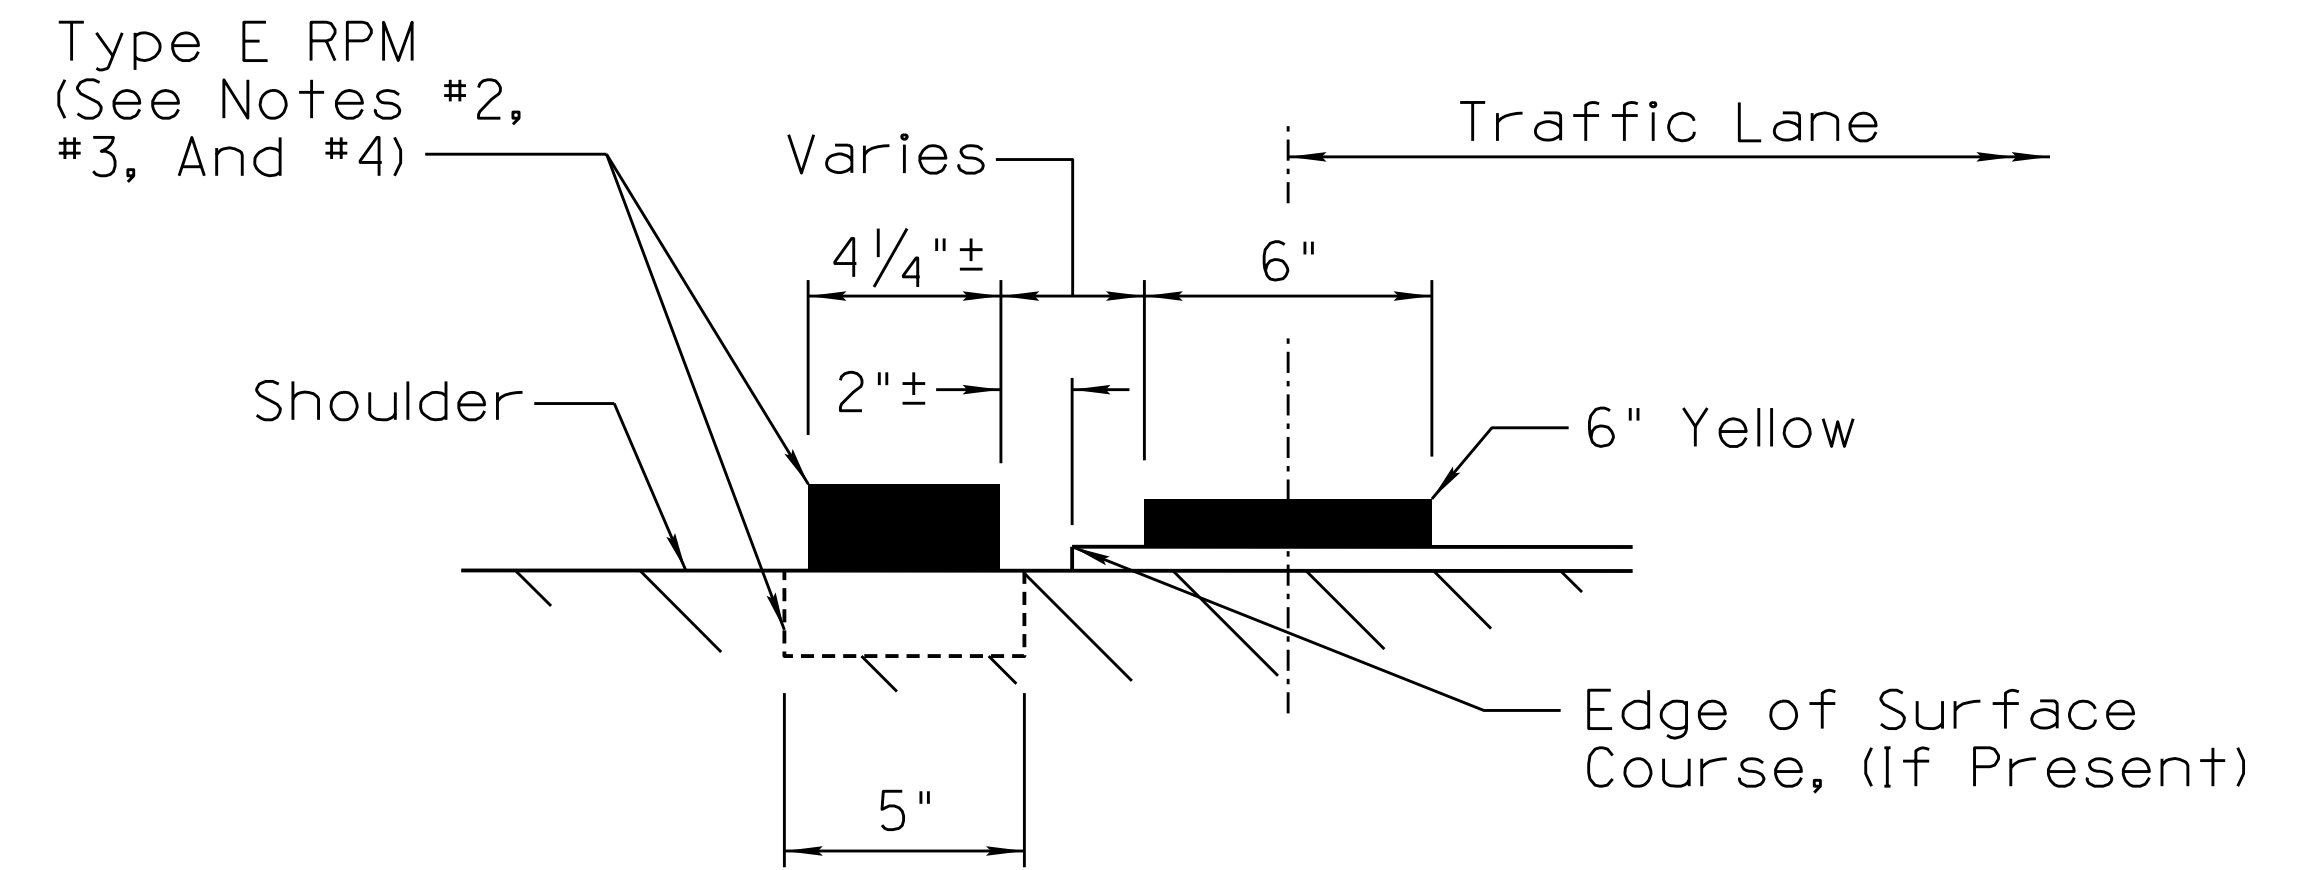

EXAMPLE 1

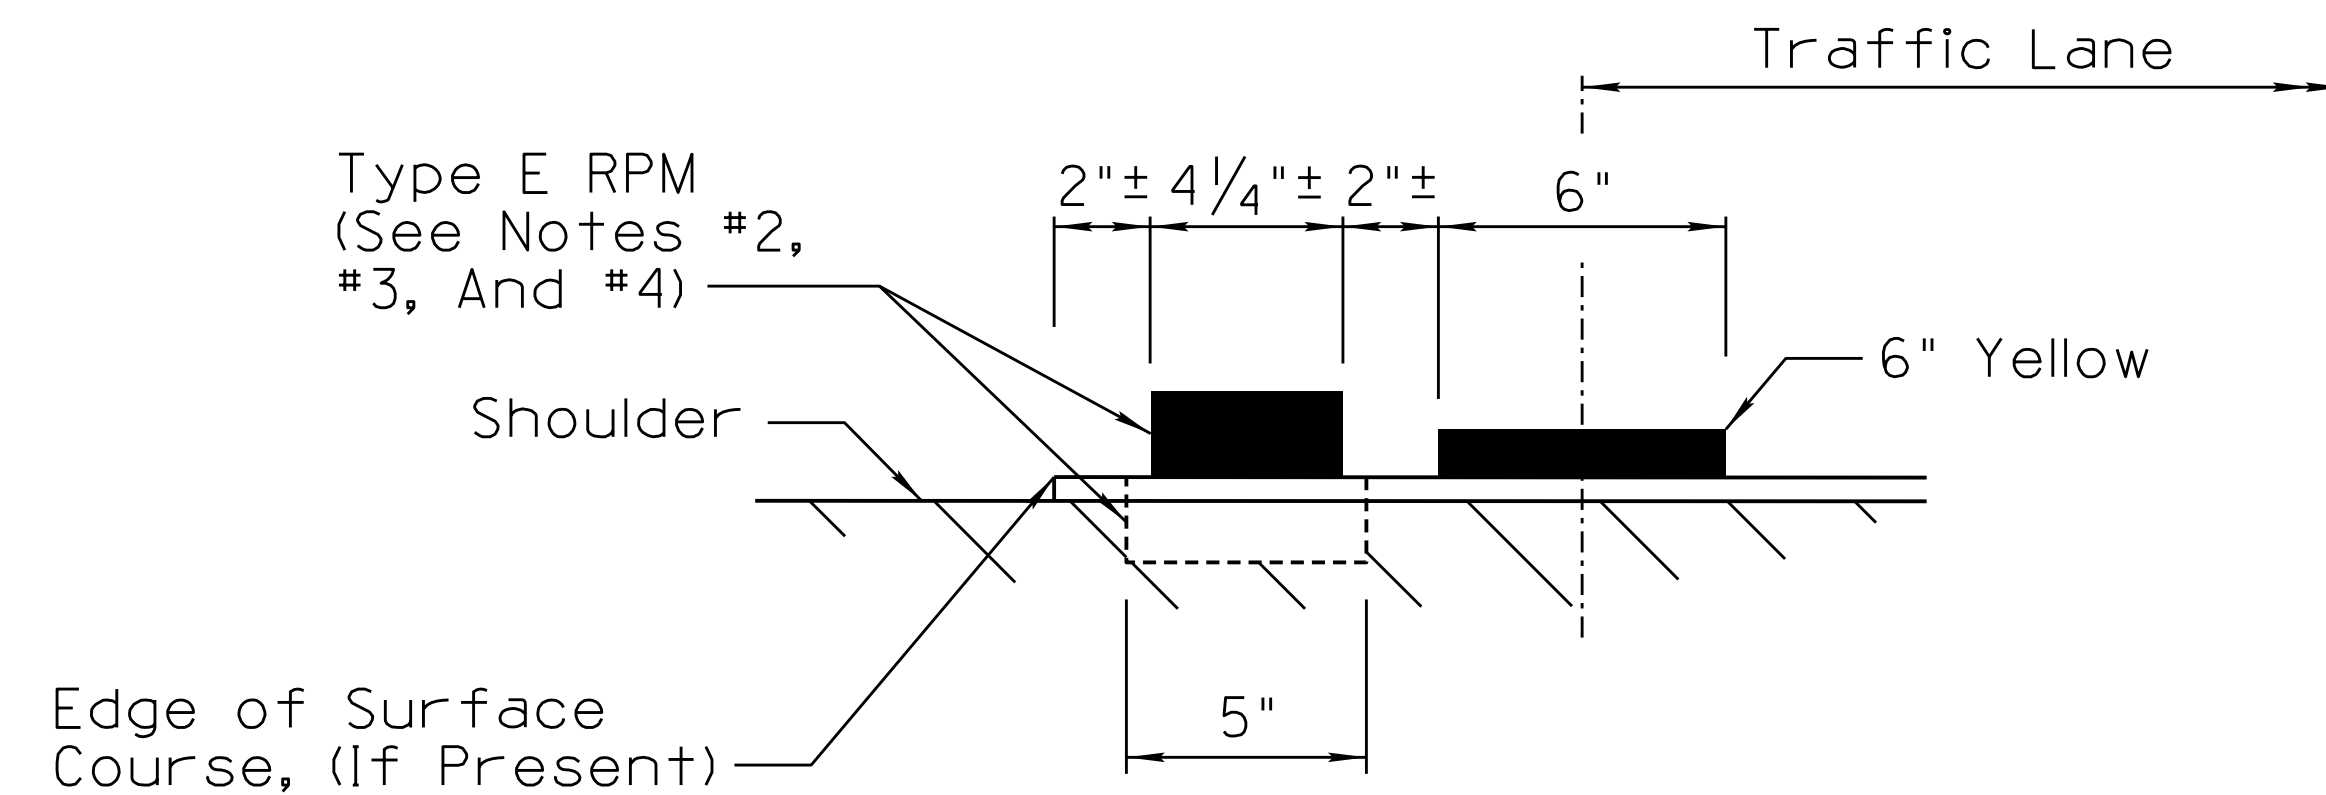

EXAMPLE 2

PLACEMENT DETAIL ②

Left Edge Line Marker
for Freeways
(See Notes)

NOTES:

1. All roadways shown are 2-way unless otherwise noted.
2. This detail is applicable to raised pavement markers.
3. Placement of Type E (edgeline) raised pavement markers shall be uniform and parallel to the edge line between the edge of surface course (if present) and rumble strip. See placement detail 2 on this sheet. Pavement markers can be installed in the rumble strip if necessary.
4. Type E raised pavement markers are to be placed a minimum of two inches clear from the edge of the surface course on either side.
5. Lane widths are as shown in plans or as directed by the Engineer.

Note to Designer: This Standard Drawing has been prepared in accordance with recognized engineering principles and is for general use. It should not be used for specific application without competent professional examination and verification of its suitability and applicability by a licensed professional engineer. Contents within the inner border line shall not be altered.

06/2014

PRIOR DISTRIBUTION D.T.E.

ST.-NO.-RDS ENGINEER H. LUN- RECOMMENDED FOR -PPROV-L GROUP M-N-CER M. HANN- -PPROVED ST.-NO.-RDS COMMITTEE -PPROVED FOR DISTRIBUTION 08/2020 D.-TE	-RIZON- DEPARTMENT OF TRANSPORTATION INFRA-STRUCTURE DELIVERY AND OPERATIONS DIVISION TRAFFIC SIGNING AND MARKING STANDARD DRAWINGS	DR.-WING NO. M-19 Sheet 9 of 11
P-VEMENT M-RKING CROSS-SECTION DET-ILS FOR HIGHWAYS AND FREEW-Y S		