




NO	DESCRIPTION OF REVISIONS	MADE BY	DATE
1	REVISED AND CONSOLIDATED WITH M-26. ARCHIVED M-36. - RE-ISSUE	A.H., HDR	6/14
2			
3			
4			

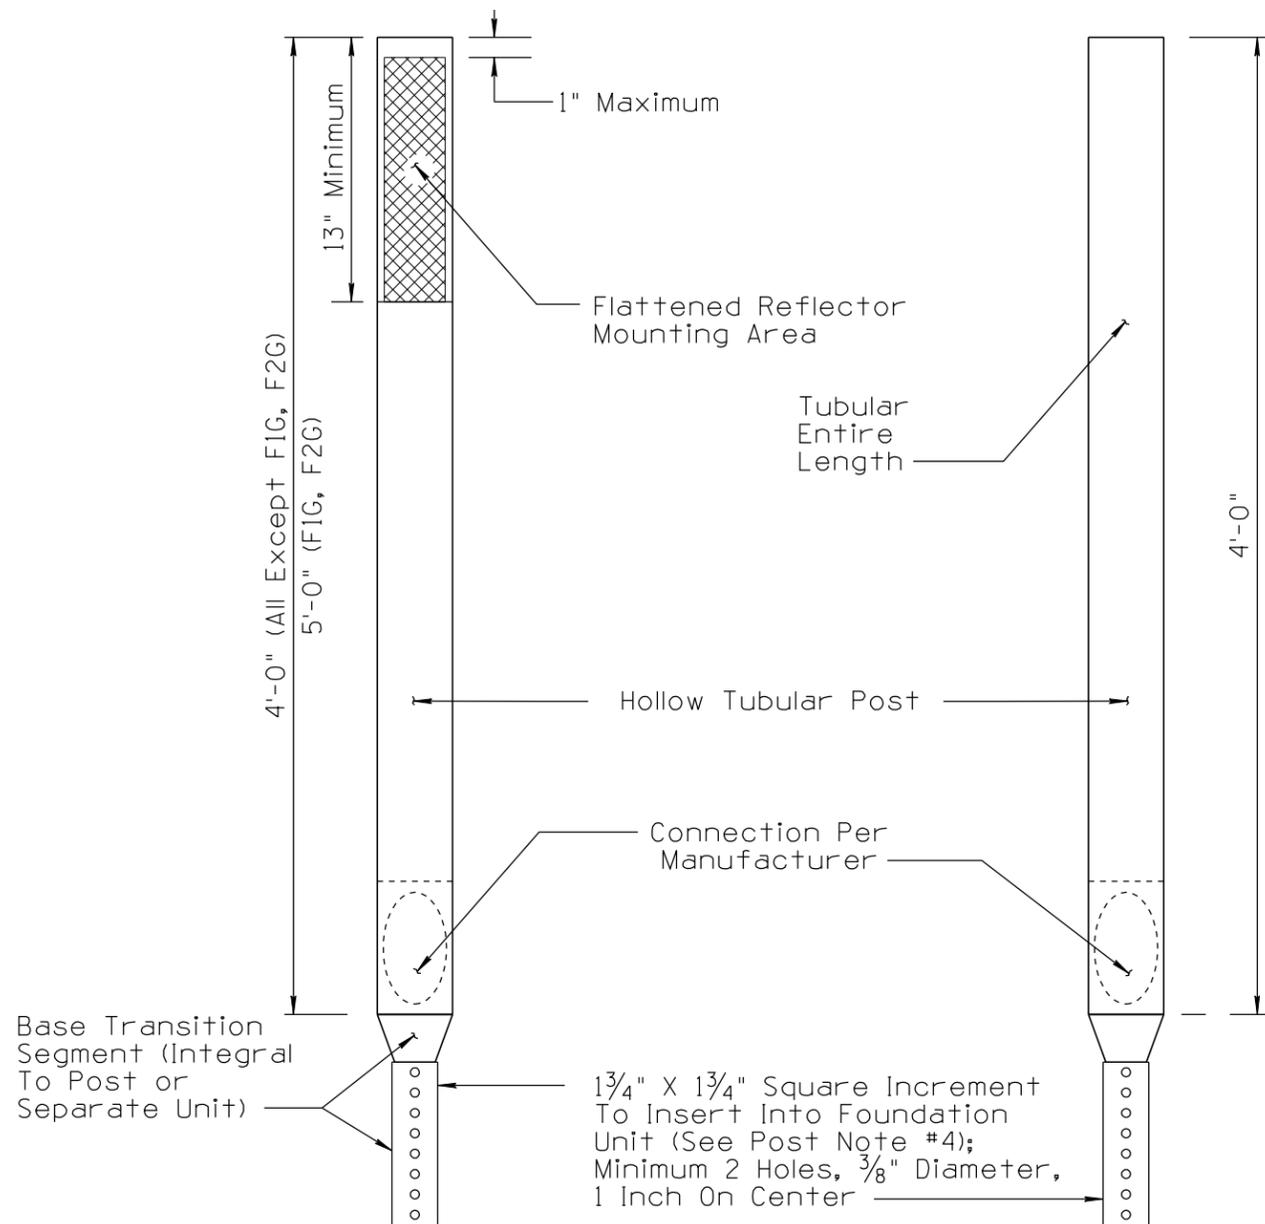


ONE-DIRECTION 360 DEGREE

POST NOTES: FLEXIBLE DELINEATOR POSTS AND BASES

- (Applicable to All Units)
1. Minimum wall thickness shall be 1/8 inch.
 2. Surface color is as specified in the delineator type table.
 3. Delineators shall meet all provisions of the Standard Specifications and the project plans.
 4. Where surface mounting is required, insertable base and surface-mounted foundation unit may use a "mating" (receptacle) shape.
 5. Upper end of base transition units shall fit the post contour sufficiently to attach firmly to the post using bolts, pins or rivets.
 6. Lower end of base transition segments and base transition units shall be shaped and sized to snugly fit the foundation unit. It shall be perforated to attach firmly to the foundation unit using bolts or pins.

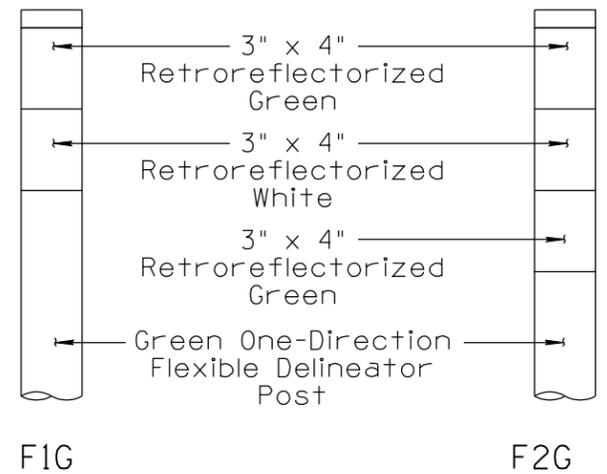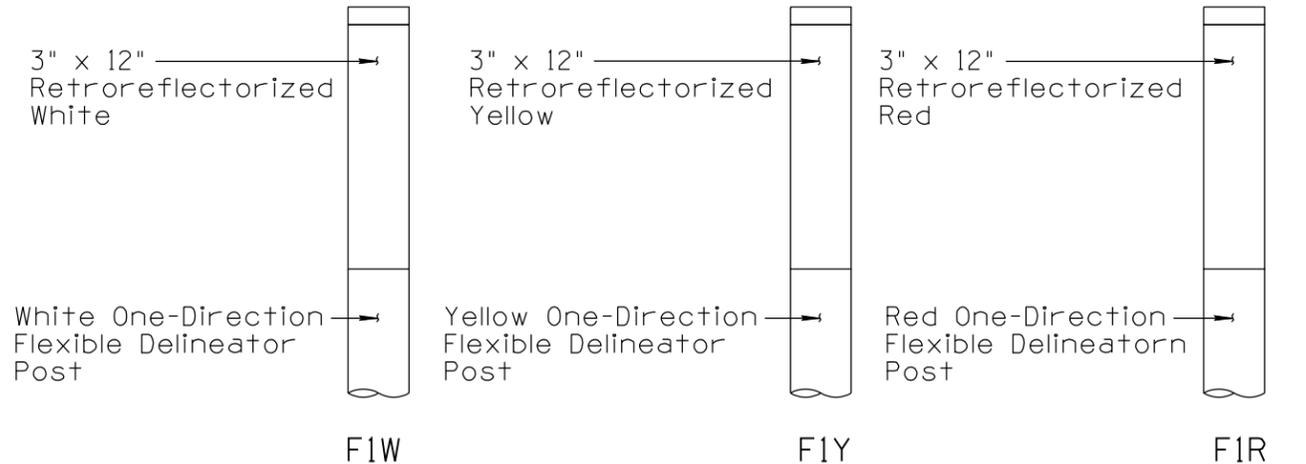

ONE-DIRECTION FLEXIBLE DELINEATORS

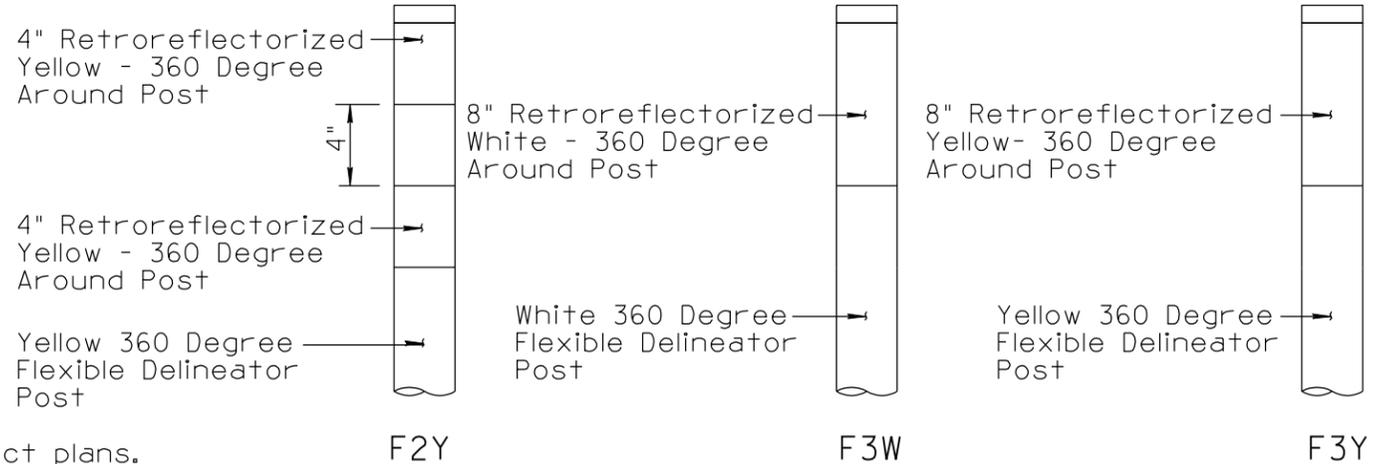

360 DEGREE FLEXIBLE DELINEATORS

NOT TO SCALE

DESIGN APPROVED	ARIZONA DEPARTMENT OF TRANSPORTATION INTERMODAL TRANSPORTATION DIVISION TRAFFIC SIGNING & MARKING STANDARD DRAWINGS	REVISION 6/14
SIGNATURES		DRAWING NO. M-26
APPROVED FOR DISTRIBUTION	FLEXIBLE DELINEATOR ASSEMBLIES	SHEET NO. 3 OF 5
ON FILE		