



TYPICAL CROSS-SECTION

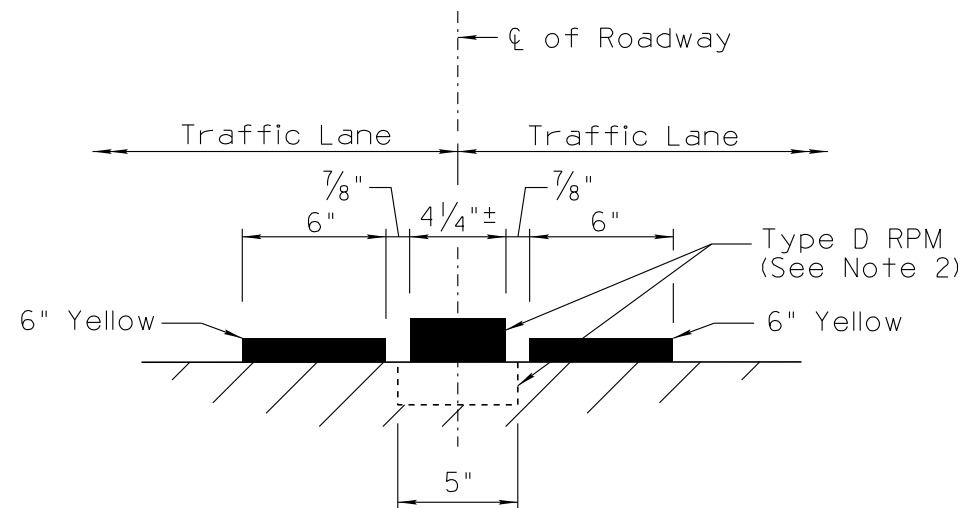


PLACEMENT DETAIL ①

NOTES:

1. All roadways shown are 2-way unless otherwise noted.
2. This detail is applicable to raised pavement markers.
3. Placement of Type E (edgeline) raised pavement markers shall be uniform and parallel to the edge line between the edge of surface course (if present) and rumble strip. See placement detail 2 on this sheet. Pavement markers can be installed in the rumble strip if necessary.
4. Type E raised pavement markers are to be placed a minimum of two inches clear from the edge of the surface course on either side.
5. Lane widths are as shown in plans or as directed by the Engineer.

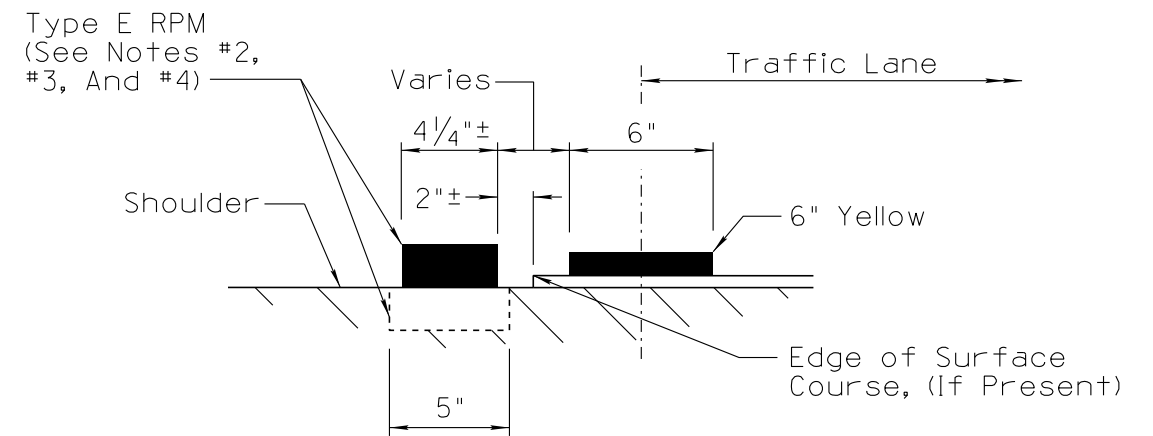

EXAMPLE 1

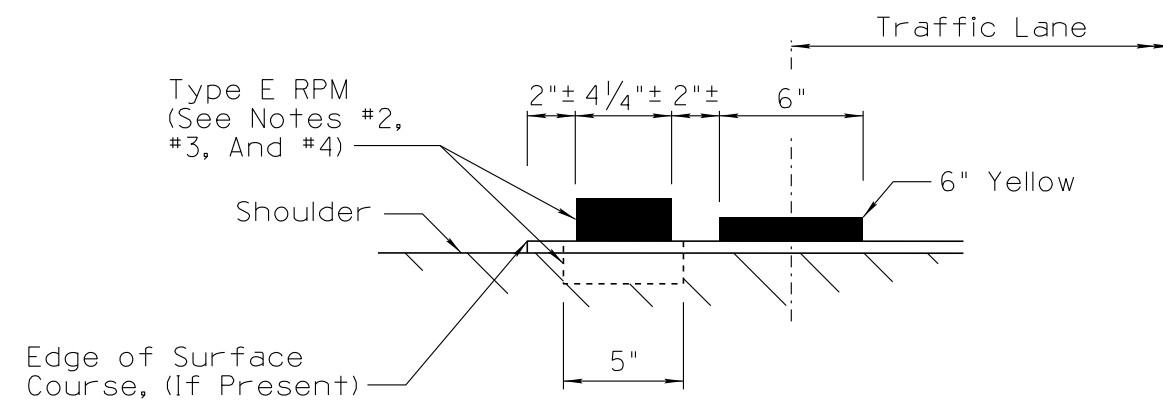

EXAMPLE 2

PLACEMENT DETAIL ②

Left Edge Line Marker for Freeways (See Notes)

STANDARDS ENGINEER <b>H. LUNA</b>	ARIZONA DEPARTMENT OF TRANSPORTATION INFRASTRUCTURE DELIVERY AND OPERATIONS DIVISION TRAFFIC SIGNING & MARKING STANDARD DRAWING	
RECOMMENDED FOR APPROVAL GROUP MANAGER <b>M. HANNA</b>	PAVEMENT MARKING CROSS-SECTION DETAILS FOR HIGHWAYS AND FREEWAYS	
APPROVED STANDARDS COMMITTEE APPROVED FOR DISTRIBUTION	08/2020 DATE	DRAWING NO. <b>M-19</b> (9 of 9)

Note to Designer: This Standard Drawing has been prepared in accordance with recognized engineering principles and is for general use. It should not be used for specific application without competent professional examination and verification of its suitability and applicability by a licensed professional engineer. Comments within the inner border line shall not be altered.

PRIOR DISTRIBUTION DATE 06/2014