



NO	DESCRIPTION OF REVISIONS	DATE	MADE BY
1	RE-ISSUE	2/02	L. LOPEZ
2	ADDED PLACEMENT DETAIL 3	6/08	L. LOPEZ
3	ADDED NEW BORDER, CHANGED TEXT CASE, REVISED DRAWING AND NOTES, REMOVED SERIES 80 FROM SHEET TOTAL.		
4			

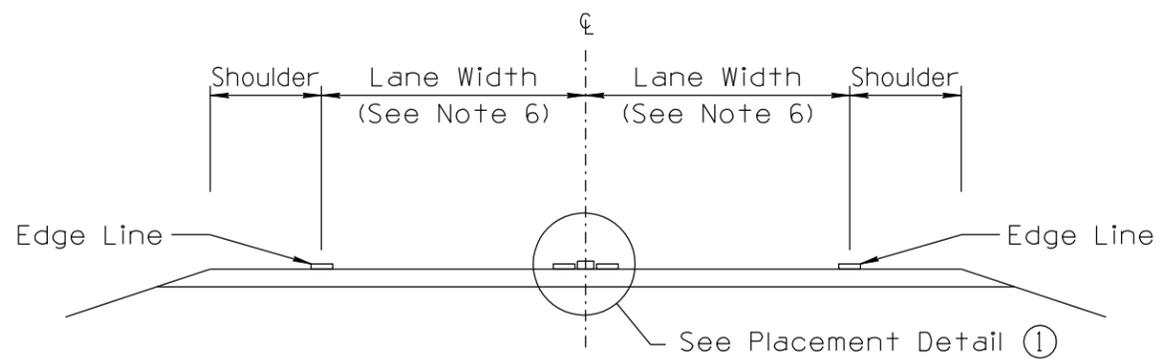


TYPICAL CROSS-SECTION

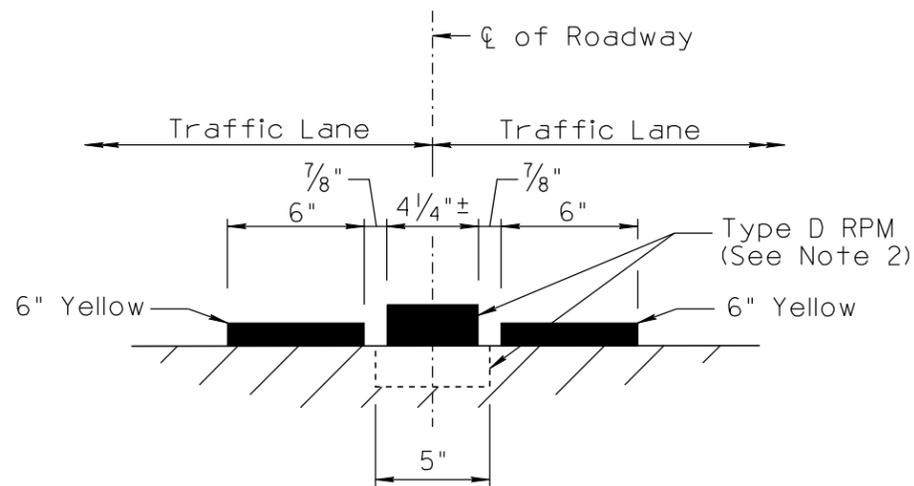


PLACEMENT DETAIL ①

NOTES:

1. All roadways shown are 2-way unless otherwise noted.
2. This detail is applicable to both raised and recessed pavement markers.
3. Placement of Type E (edgeline) pavement markers shall be uniform and parallel to the edge line between the edge of surface course (if present) and rumble strip. See placement detail ② on this sheet. Pavement markers can be installed in the rumble strip if necessary.
4. See Std Dwg M-18 for recessed applications.
5. Type E pavement markers are to be placed a minimum of two inches clear from the edge of the surface course on either side.
6. Lane widths are as shown in plans or as directed by the Engineer.

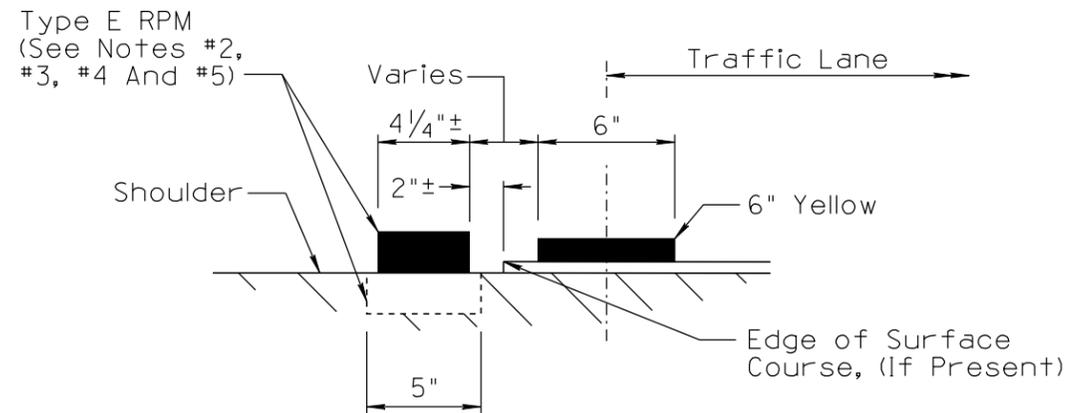

EXAMPLE 1

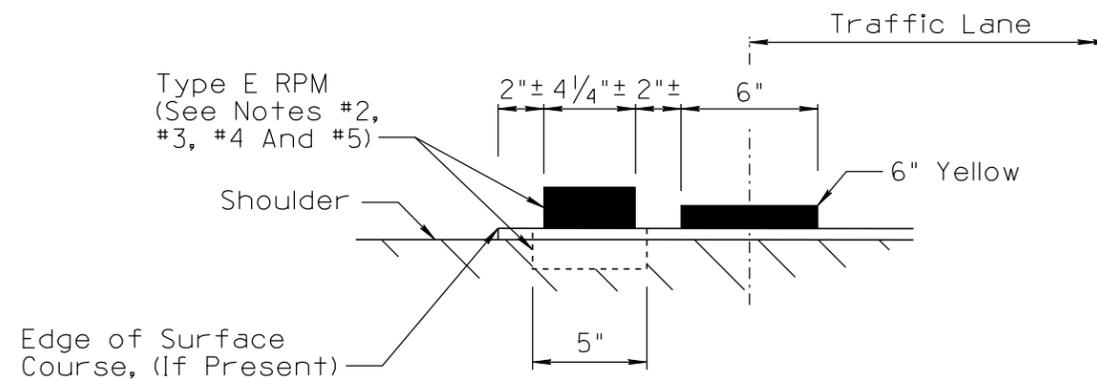

EXAMPLE 2

PLACEMENT DETAIL ②

Left Edge Line Marker
for Freeways
(See Notes)

NOT TO SCALE

DESIGN APPROVED	ARIZONA DEPARTMENT OF TRANSPORTATION INTERMODAL TRANSPORTATION DIVISION TRAFFIC SIGNING & MARKING STANDARD DRAWINGS	REVISION
SIGNATURES		6/14
APPROVED FOR DISTRIBUTION	PAVEMENT MARKING CROSS-SECTION DETAILS FOR HIGHWAYS AND FREEWAYS	DRAWING NO.
ON FILE		M-19
		SHEET NO.
		9 of 9