

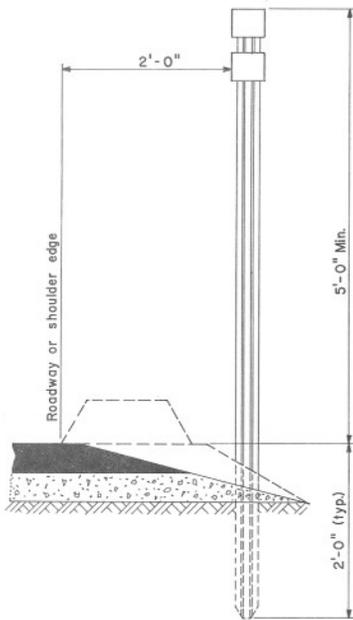



SNOW MARKER DETAILS

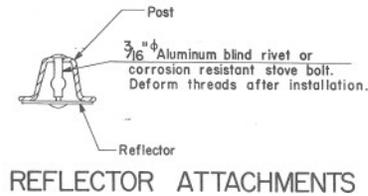


INSTALLATION DETAIL

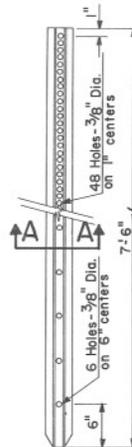

GALVANIZED STEEL POST

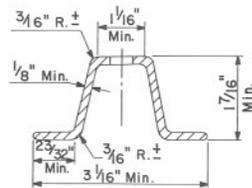

SECTION A-A

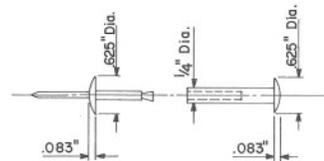

BLIND RIVET DETAIL

NOTES:

1. The Single Green marker shall be used at the beginning of curb and guardrail. The Double Green marker shall be used at the end of curb and guardrail.
2. Where embankment curb begins at or near the tangent section of guardrail, the Single Green marker shall not be installed for the curb.
3. Where embankment curb ends before or immediately beyond the end of guardrail, the Double Green marker shall not be installed for the curb.
4. Reflective devices shall be either 3/4" diameter plastic prismatic reflectors or 4"x4" high reflectivity reflective sheeting reflectors; however a single style must be used throughout the project.
5. Plastic prismatic reflectors shall be green and shall conform to Section 1008 of the Standard Specifications.
6. Reflective sheeting reflectors shall be green and shall conform to Section 1007 of the Standard Specifications.
7. Backplates for reflective sheeting reflectors shall be fabricated from .063" thick 3003-H14, 5052-H38 or 6061-T6 aluminum alloy etched on both sides.
8. Steel posts shall conform to A.S.T.M.-A570 Grade 30, 36 or 40 and shall not weigh less than 1.9 pound per foot. They shall be galvanized to conform to A.S.T.M.-A123.

DESIGN APPROVED <i>Carli Brown</i> 7/26/81	STATE OF ARIZONA DEPARTMENT OF TRANSPORTATION DIVISION OF HIGHWAYS STANDARD DRAWINGS	REV 8-81 10-82
APPROVED FOR DISTRIBUTION <i>[Signature]</i> 8/2/81	SNOW MARKER DETAILS	DRAWING NO. 4-M-9.01