

R2-1
Black on White
36"x48"



R2-2 White
36"x36"

Use if reduced Truck
Speed Limit for Trucks

W7-1b
Black on Yellow
10"x5'



USE LOWER
GEARS

W7-2C
Black on Yellow
5'x2'

W7-6
Black on Yellow
10'x5'

TRUCKS - VEHICLES
PULLING TRAILERS
USE LOWER GEARS

W7-7
Black on Yellow
10'x2'

SAFETY PULLOUT

W7-6a
Black on Yellow
10'x5'

TRUCKS - VEHICLES
PULLING TRAILERS
CHECK
BRAKES-EQUIPMENT
1/4 MILE

W7-7a
Black on Yellow
10'x3'

SAFETY PULLOUT
1/2 MILE

W7-1b
Black on Yellow
48"x48"



3/4 MILE
AHEAD

W7-3Z
Black on Yellow
5'x3'

W7-7b
Black on Yellow
10'x3'

SAFETY PULLOUT
1 MILE

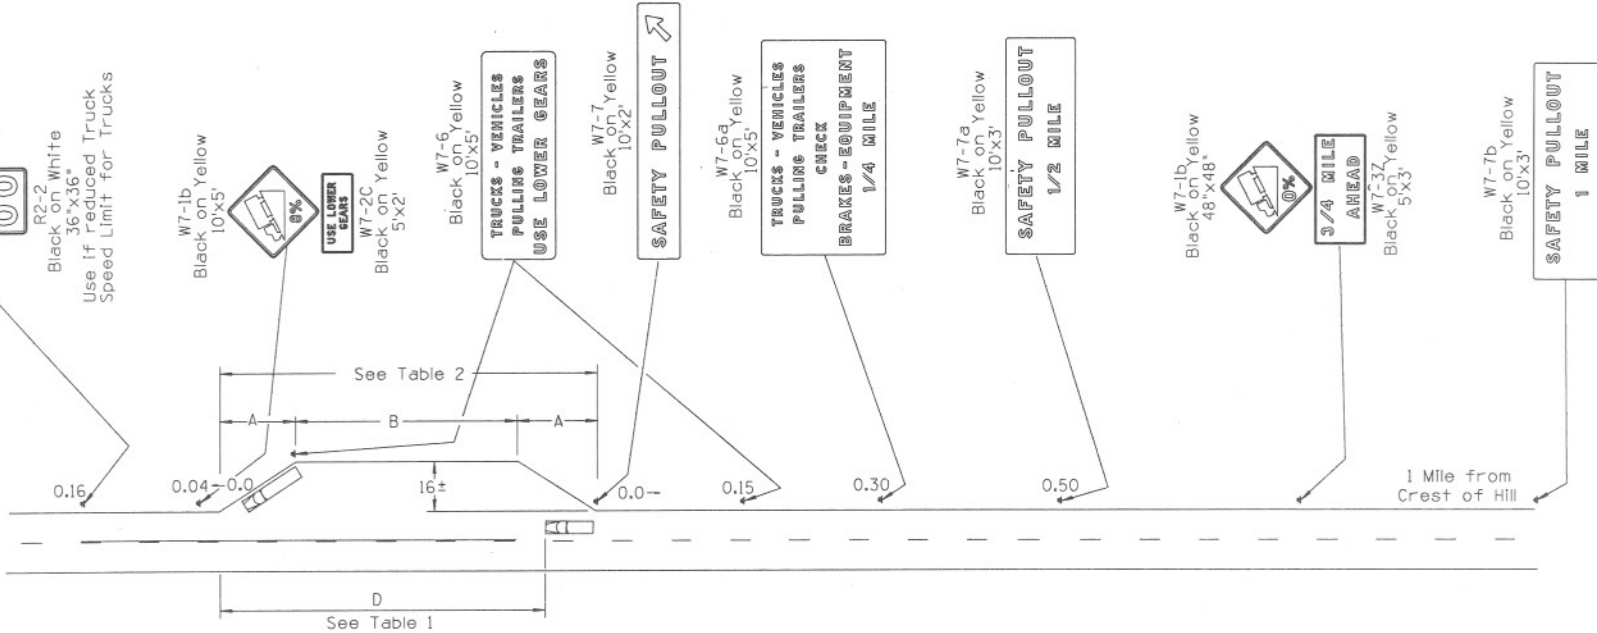


TABLE 1

SPEED MPH	MINIMUM SAFE STOPPING SIGHT DISTANCE - D
70	820'
65	725'
60	620'
55	540'
50	450'
45	375'
40	310'

TABLE 2

SPEED MPH	PULLOUT DIMENSIONS	
	A	B
65	290'	550'
60	270'	500'
50	230'	425'
40	190'	325'

CONVERSION TABLE

MILES	FEET
.04	211'
.15	792'
.16	845'
.30	1584'
.50	2640'
0.0	Core Point

DO NOT SCALE

DESIGN APPROVED <i>Robert L. Hatcher</i> 12/12/90	STATE OF ARIZONA DEPARTMENT OF TRANSPORTATION DIVISION OF HIGHWAYS STANDARD DRAWINGS	12-85 REV. 12-90
APPROVED FOR DISTRIBUTION <i>August V. Harty</i>	STANDARD SAFETY PULLOUT SIGNING	DRAWING NO. 4-S-1.06