


R3-10 * Increase spacing 100%

COLORS
LEGEND - BLACK (NON-REFL)
BACKGROUND - WHITE (REFL)
SYMBOL - REFL WHITE ON BLACK


SIGN	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R
MIN.	30	42	1/2	3/4	3 1/4	4B	2	4C	1 1/4	7 1/2	10 3/8	6	8 1/4	1 1/8	3 3/4	1 1/8
STD.	30	42	1/2	3/4	3 1/4	4B	2	4C	1 1/4	7 1/2	10 3/8	6	8 1/4	1 1/8	3 3/4	1 1/8
EXPWY.	36	60	3/8	1/2	4 1/2	6B	3	6C	2	10	15 1/2	9	10 1/2	1 1/2	5	2 1/4
FWY.	48	84	3/4	1 1/4	6	8B	4	8C	3	15	20 3/4	12	14	2 1/4	7 1/2	3

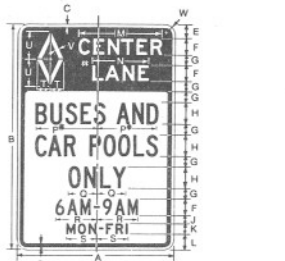

R3-11 * Reduce spacing 25%
* Optically locate symbol B top legend

COLORS
TOP SYMBOL & LEGEND - WHITE (REFL) LEGEND - BLACK (NON-REFL)
BACKGROUND - BLACK (NON-REFL) BACKGROUND - WHITE (REFL)


SIGN	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R
MIN/STD	30	42	1/2	3/4	2 1/2	3D	2	4C	1 1/2	2D	3	14 3/8	9 3/8	12	5 1/2	VAR
EXPWY.	42	60	5/8	1 1/8	4	4D	3	6C	2	3D	3	19 1/8	12 3/8	18	8 1/4	VAR
FWY.	54	84	3/4	1 1/4	5	6D	4	8C	3	4D	6	26 3/8	19 1/8	24	11	VAR
S T U V W X Y Z AA																
MIN/STD	VAR	2 1/2	5	3/4	1 1/4	10	8 1/4	4B								
EXPWY.	VAR	3 1/4	7 1/2	1 1/4	2 1/4	11 3/8	6B									
FWY.	VAR	5	10	1 1/2	3	20 1/2	8B									

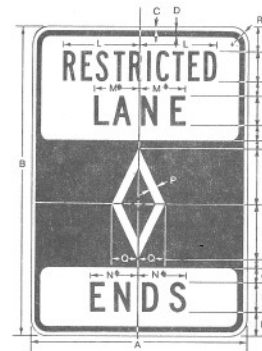

R3-12 * Increase spacing 100%

COLORS
LEGEND - BLACK (NON-REFL)
BACKGROUND - WHITE (REFL)
SYMBOL - REFL WHITE ON BLACK

SIGN	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R
MIN.	30	42	1/2	3/4	3 1/4	4B	2	4C	1 1/4	7 1/2	10 3/8	6	8 1/4	1 1/8	3 3/4	1 1/8
STD.	30	42	1/2	3/4	3 1/4	4B	2	4C	1 1/4	7 1/2	10 3/8	6	8 1/4	1 1/8	3 3/4	1 1/8
EXPWY.	36	60	3/8	1/2	4 1/2	6B	3	6C	2	10	15 1/2	9	10 1/2	1 1/2	5	2 1/4
FWY.	48	84	3/4	1 1/4	6	8B	4	8C	3	15	20 3/4	12	13	2 1/4	7 1/2	3

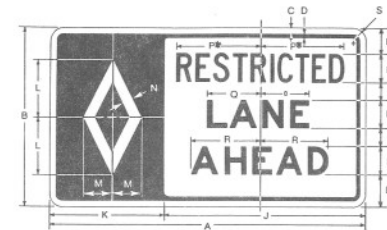

R3-13 * Reduce spacing 50%

COLORS
LEGEND - BLACK (NON-REFL)
BACKGROUND - WHITE (REFL)
SYMBOL - REFL WHITE ON BLACK

SIGN	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S
MIN/STD	66	36	3/8	1/2	5 1/2	6C	3 1/2	6D	42	24	12	6	2	17	9 3/8	13 1/8	2 1/4
EXPWY.	84	48	3/4	1 1/4	7	8C	5	8D	54	30	16	8	2 1/2	22 1/2	12 3/4	17 3/8	3
FWY.	102	60	1	1 1/2	9	10C	6	10D	66	36	20	10	3	28	16	25 3/8	3 3/4



R3-14 ** Optically locate symbol & top legend

COLORS
TOP SYMBOL & LEGEND - WHITE (REFL)
BACKGROUND - BLACK (NON-REFL)
BOTTOM LEGEND - BLACK (NON-REFL)
BACKGROUND - WHITE (REFL)

SIGN	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	U
MIN.	30	42	1/2	2 1/2	3D	2	2 3/4	4C	2 1/2	3 3/4	8 1/2	9 3/4	2 1/2	5	3 1/2	12	5 1/2	1 1/4	3/4
STD.	30	42	1/2	2 1/2	3D	2	2 3/4	4C	2 1/2	3 3/4	8 1/2	9 3/4	2 1/2	5	3 1/2	12	5 1/2	1 1/4	3/4
EXPWY.	10	30	1 1/2	5	9 1/4	24	16	23 3/8	7 1/2	12 3/8	13	11	5	5	5	5	5	5	5
FWY.	42	60	3/4	4	4D	3	3 3/4	6C	3 1/4	4 1/4	11 1/4	12 3/4	3 3/4	1 1/4	18	8 1/4	2 1/4	1 1/4	


NOTE:
1.) Dimensions are nominal inches

DESIGN APPROVED 2/25
Regal/Heater
APPROVED FOR DISTRIBUTION
Coyne/M...
1/1/88

STATE OF ARIZONA
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
STANDARD DRAWINGS


REGULATORY SIGNS
4-S-2.12

REV. 5-89
DRAWING NO.

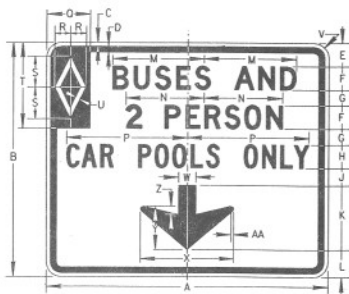

R3-15 * Reduce spacing 50%

COLORS
LEGEND - BLACK (NON-REFL)
BACKGROUND - WHITE (REFL)
SYMBOL - REFL WHITE ON BLACK

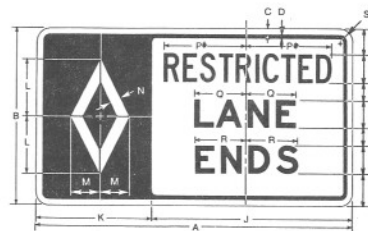

R3-16 * Reduce spacing 25%

COLORS
LEGEND - BLACK (NON-REFL)
BACKGROUND - WHITE (REFL)

SIGN	A	B	C	D	E	F	G	H	J	K	L	M	N	P
MIN.	24	30	3/8	3/4	3 3/4	4D	2 1/4	9 3/8	10	6	6 3/8	7 1/8	7 3/8	1 1/2
STD.	24	30	3/8	3/4	3 3/4	4D	2 1/4	9 3/8	10	6	6 3/8	7 1/8	7 3/8	1 1/2
EXPWY.	36	48	3/8	1/2	6	6D	4	14 3/8	15	9	9 3/8	10 1/8	11 3/8	2 1/4
FWY.	48	60	3/4	1 1/4	7 1/4	8D	4 1/4	19 1/8	20	12	13 3/8	14 1/4	15 1/4	3

SIGN	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R
MIN.	72	60	1	1 1/2	6	6D	4	6C	4 1/2	16 1/2	7	23 1/2	20 1/4	31	11	4
STD.	72	60	1	1 1/2	6	6D	4	6C	4 1/2	16 1/2	7	23 1/2	20 1/4	31	11	4
EXPWY.	96	72	1 1/4	1 3/4	8	8D	6	8C	4 1/2	16 1/2	7	31 1/2	26 1/4	41	15	5
FWY.	108	84	1 1/2	2	10	10D	6	10C	4	22	6	39	33 1/4	48	18	6
S T U V W X Y Z AA																
MIN.	8	22	1 1/4	3 1/4	4 1/2	24	10 1/2	27 1/8	1 1/8							
STD.	8	22	1 1/4	3 1/4	4 1/2	24	10 1/2	27 1/8	1 1/8							
EXPWY.	10	30	1 1/2	5	9 1/4	24	16	23 3/8	7 1/8							
FWY.	12	36	2	6	6 1/2	32	16	3	1							

MADE BY DATE

DESCRIPTION OF BUSINESS