




■ When Sign is 30' or more from Edge of paved Shoulder, the 7'-0" Shoulder Clear may be reduced to 5'-0" Min.

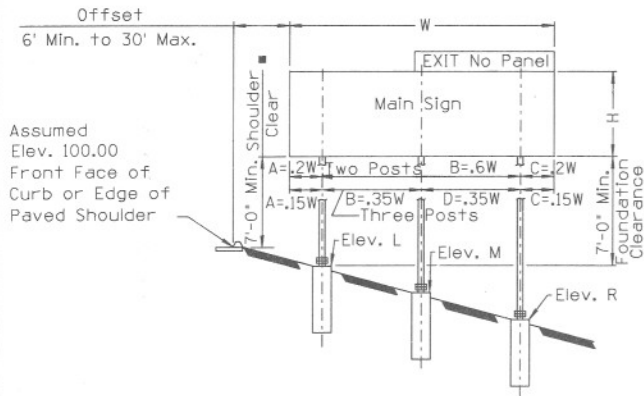


GUIDE SIGN
INSTALLED ON SHOULDER

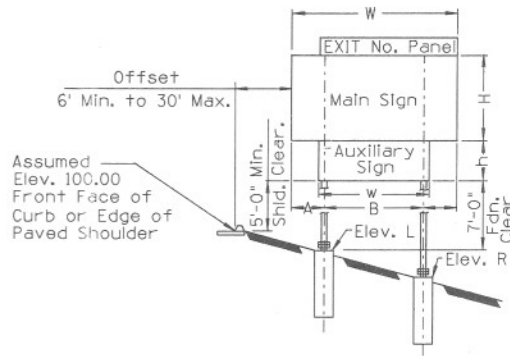


GUIDE SIGN WITH AUXILIARY SIGN
INSTALLED ON SHOULDER

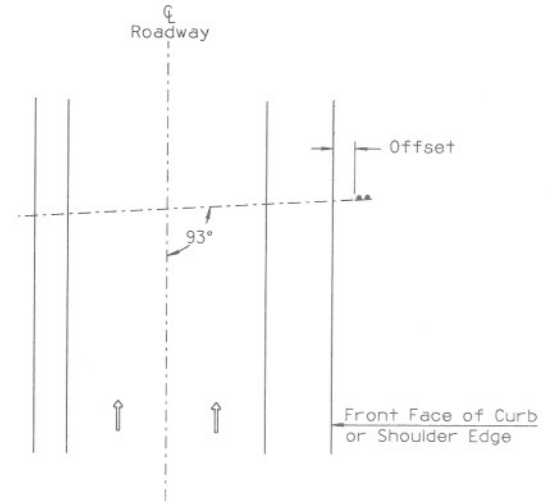


TYPICAL SIGN INSTALLATION
ON SHOULDER

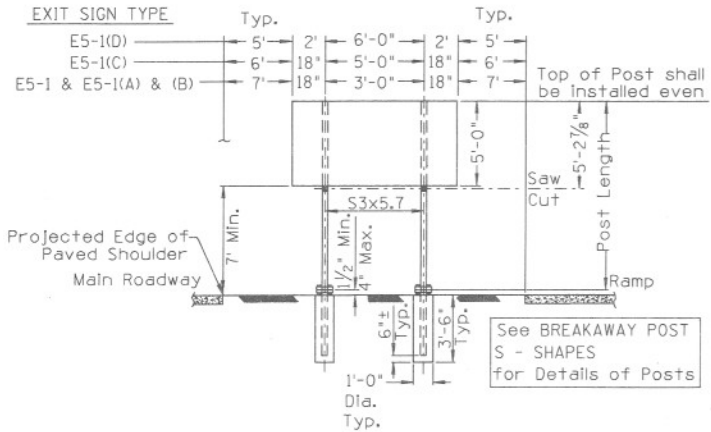

TYPICAL EXIT GORE SIGN



FOR GORE
INSTALLATIONS ONLY

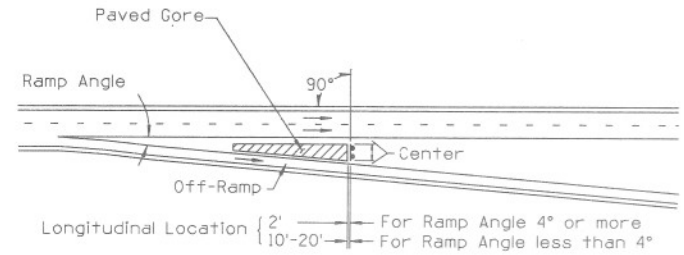

EXIT GORE SIGN LOCATION

THE LOCATION MAY BE SHIFTED BY THE ENGINEER TO SECURE A MORE DESIRABLE LOCATION.

DESIGN APPROVED <i>Robert L. Hutto</i> 12/12/90	STATE OF ARIZONA DEPARTMENT OF TRANSPORTATION DIVISION OF HIGHWAYS STANDARD DRAWINGS	6-74 REV. 4-79 4-86 5-89 12-90
APPROVED FOR DISTRIBUTION <i>August W. Harts</i>	GUIDE SIGNS BREAKAWAY POST INSTALLATIONS	DRAWING NO. 4-S-4.01