



M4-9a

BICYCLE PEDESTRIAN DETOUR

\*Series 2000 Standard Alphabets.

\*\*See page 6-10 for symbol design.

\*\*\*See page 6-7 for symbol design.

**C**


A	B	C	D	E	F	G	H	J	K	L	M
30	24	.5	.75	2	7.205	1	5 D	3.802	5	5.324	3.122
48	36	.75	1.25	3	10.648	1.641	8 D	5.924	6.805	8.086	4.403
60	48	.75	1.25	5.203	13.330	2.081	10 D	7.405	10	6.925	10.127


N	P	Q	R	S	T
9	8.526	12.169	7	2	1.875
13.530	13.290	19.454	11.208	3.202	3
16.812	16.812	24.318	14	4	

TTC SIGN COLORS:


LEGEND — BLACK

BACKGROUND— ORANGE (RETROREFLECTIVE)

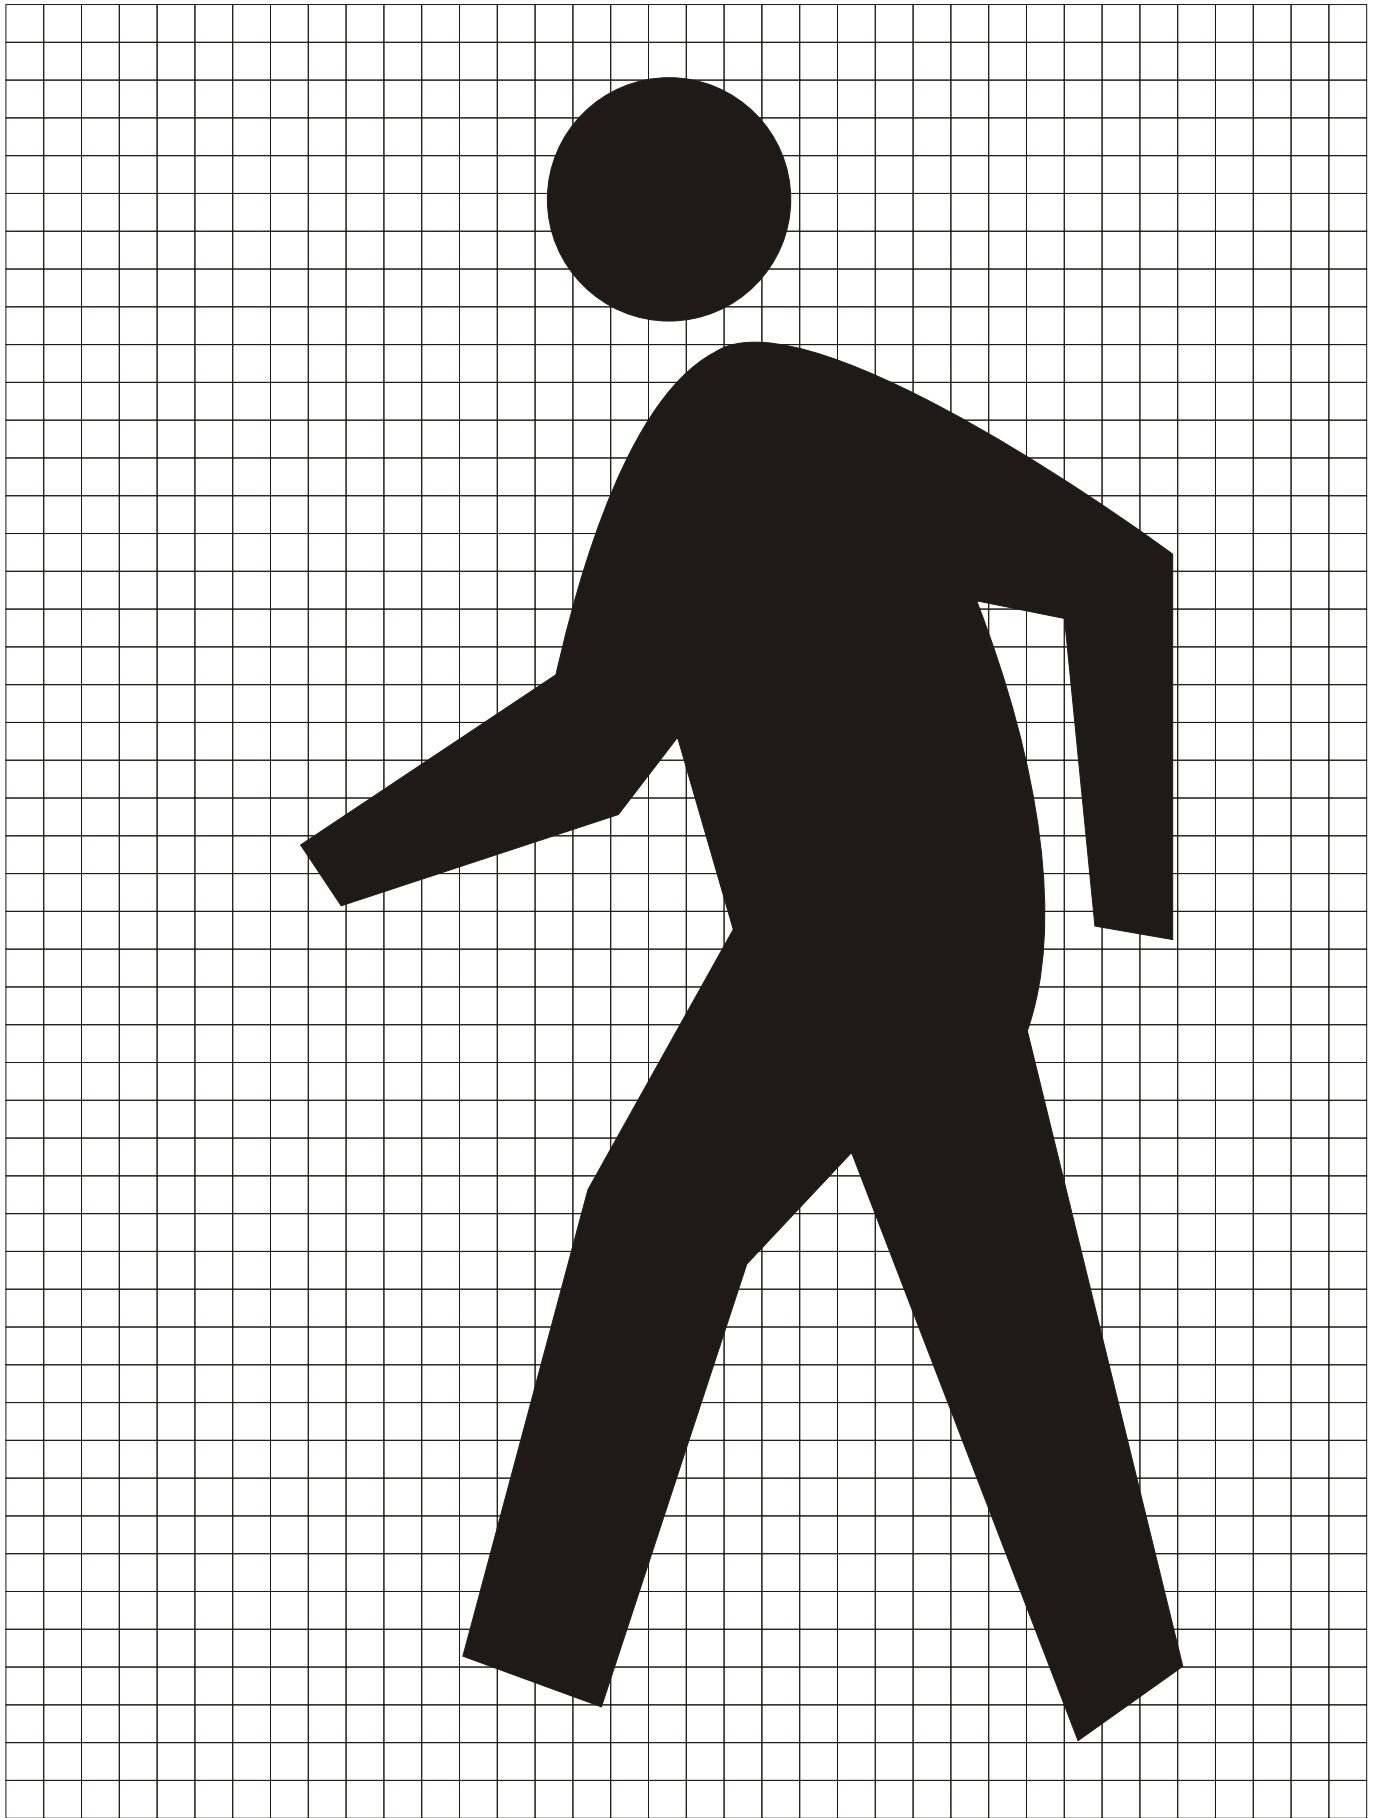

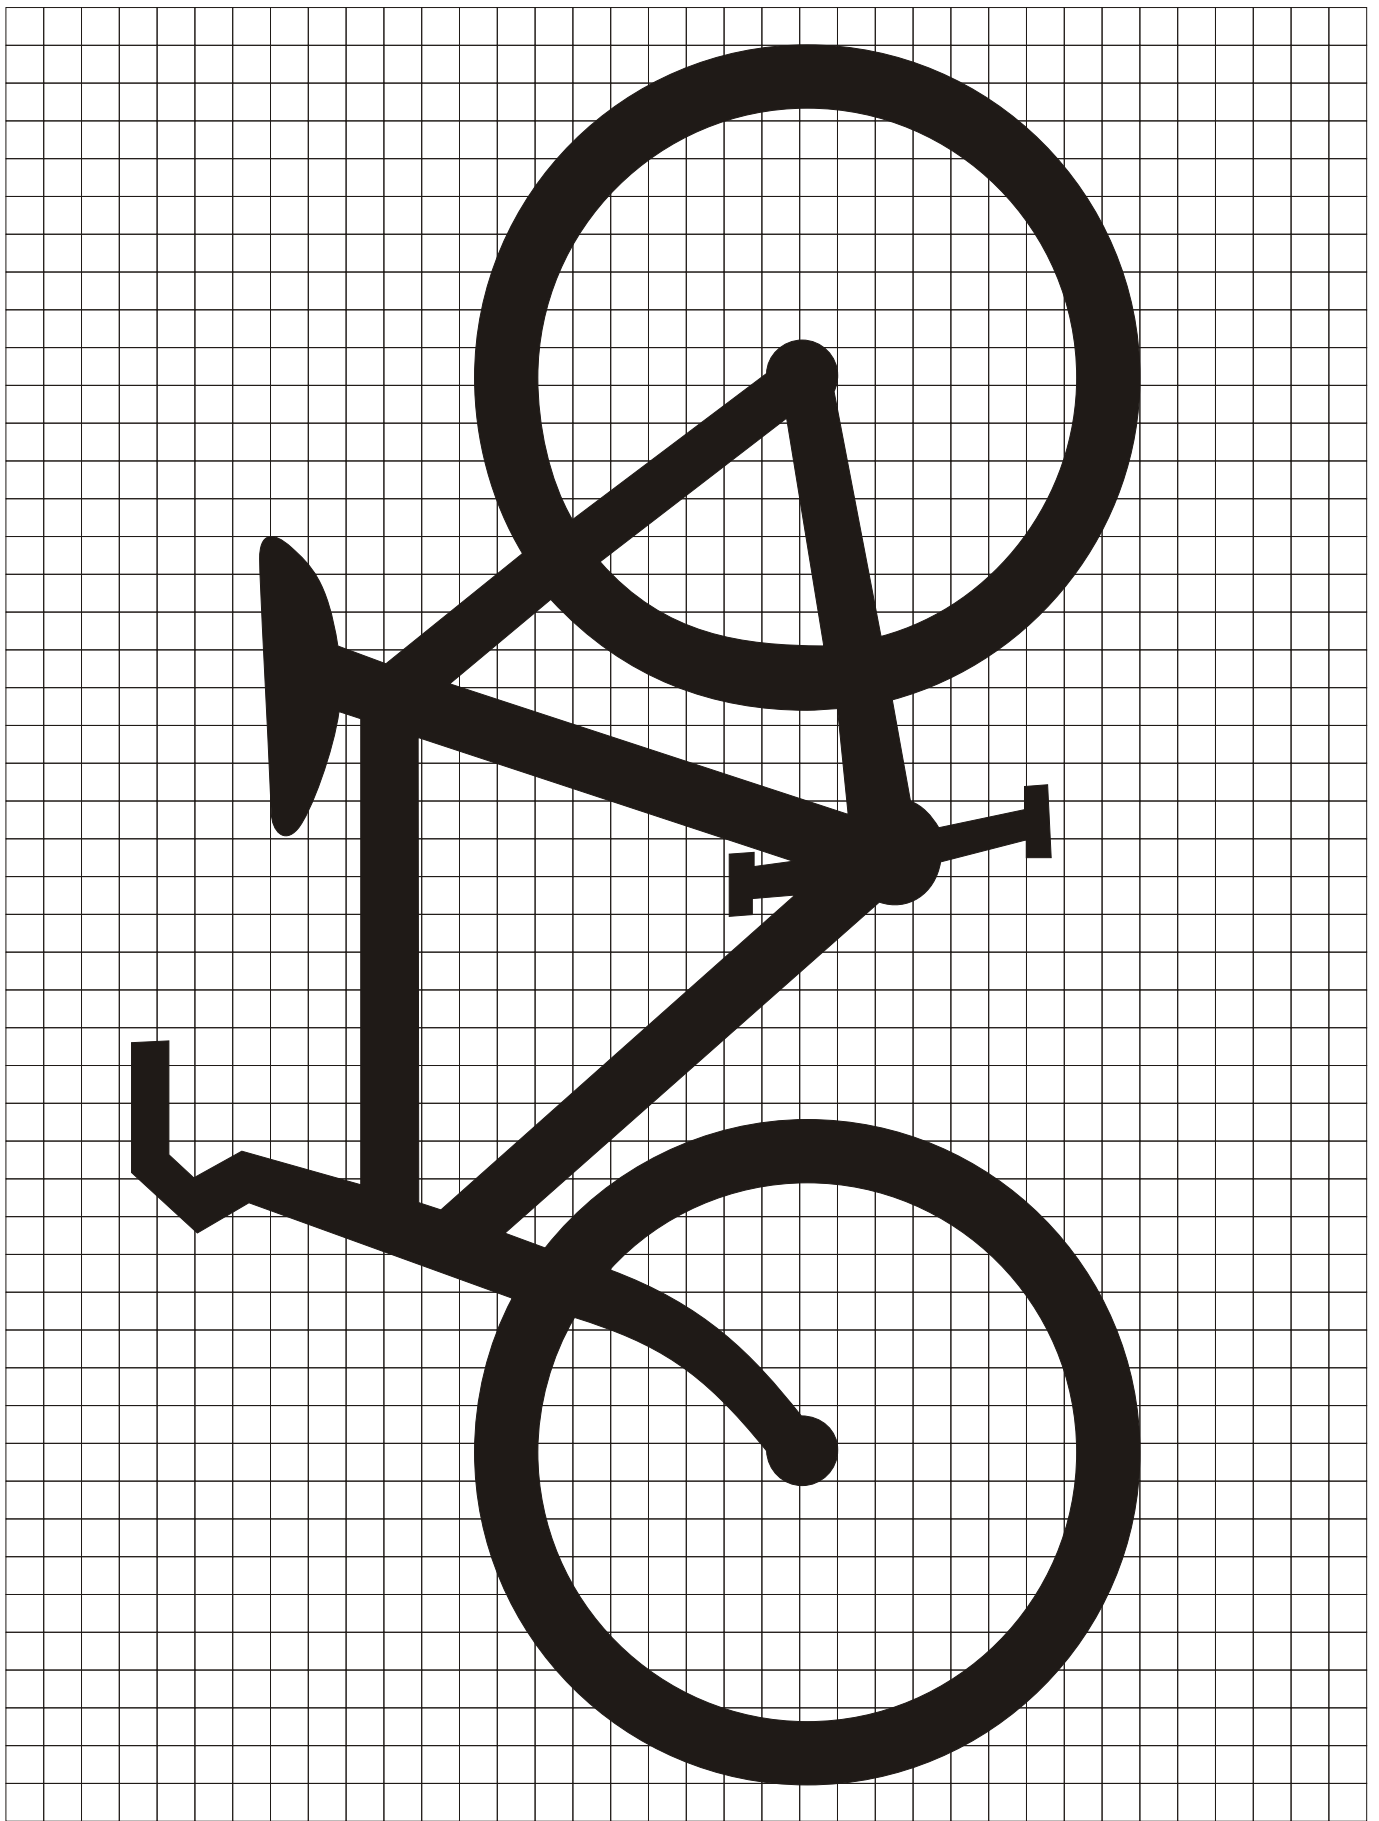

# ADOT STANDARD ARROW HEAD DETAILS

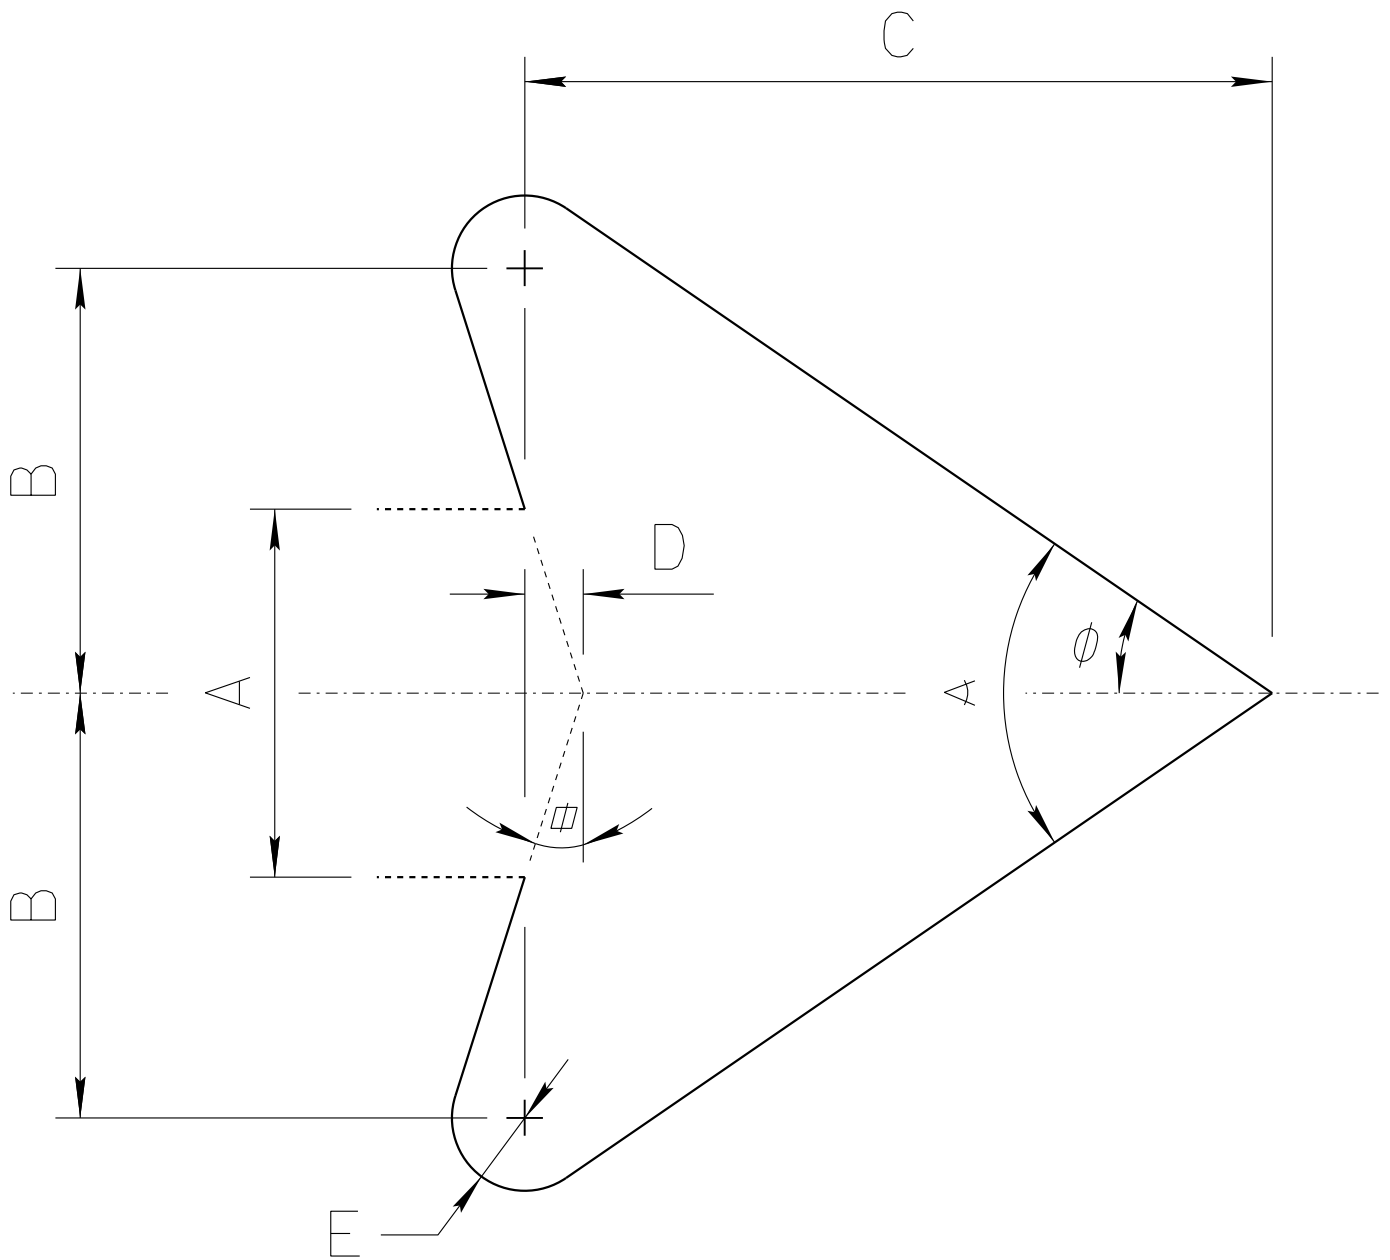

$A =$  Arrow Shaft Stroke Width

$B = 1.15 \times A$

$C = 2.025 \times A$

$D = 0.16169 \times A$

$E = 0.2 \times A$

$\alpha = 17.92^\circ$

$\phi = 34.519^\circ$

$\alpha = 69.038^\circ$

ARIZONA DEPARTMENT OF TRANSPORTATION  
TRAFFIC ENGINEERING GROUP

DRAWN:

L. LOPEZ

DATE:

AUGUST/2019