




M4-9b
PEDESTRIAN DETOUR

*Series 2000 Standard Alphabets.
**See page 6-10 for symbol design.
Optically center symbol about centerline.


C	A	B	C	D	E	F	G	H	J	K	L	M
	30	24	.5	.75	2	7.205	1	5 D	3.802	5	12.169	7
	48	36	.75	1.25	3	10.648	1.641	8 D	5.924	6.805	19.454	11.208
	60	48	.75	1.25	5.203	13.330	2.081	10 D	7.405	10	24.318	14

N	P
2	1.875
3.202	3
4	3

TTC SIGN COLORS:
LEGEND — BLACK
BACKGROUND— ORANGE (RETROREFLECTIVE)

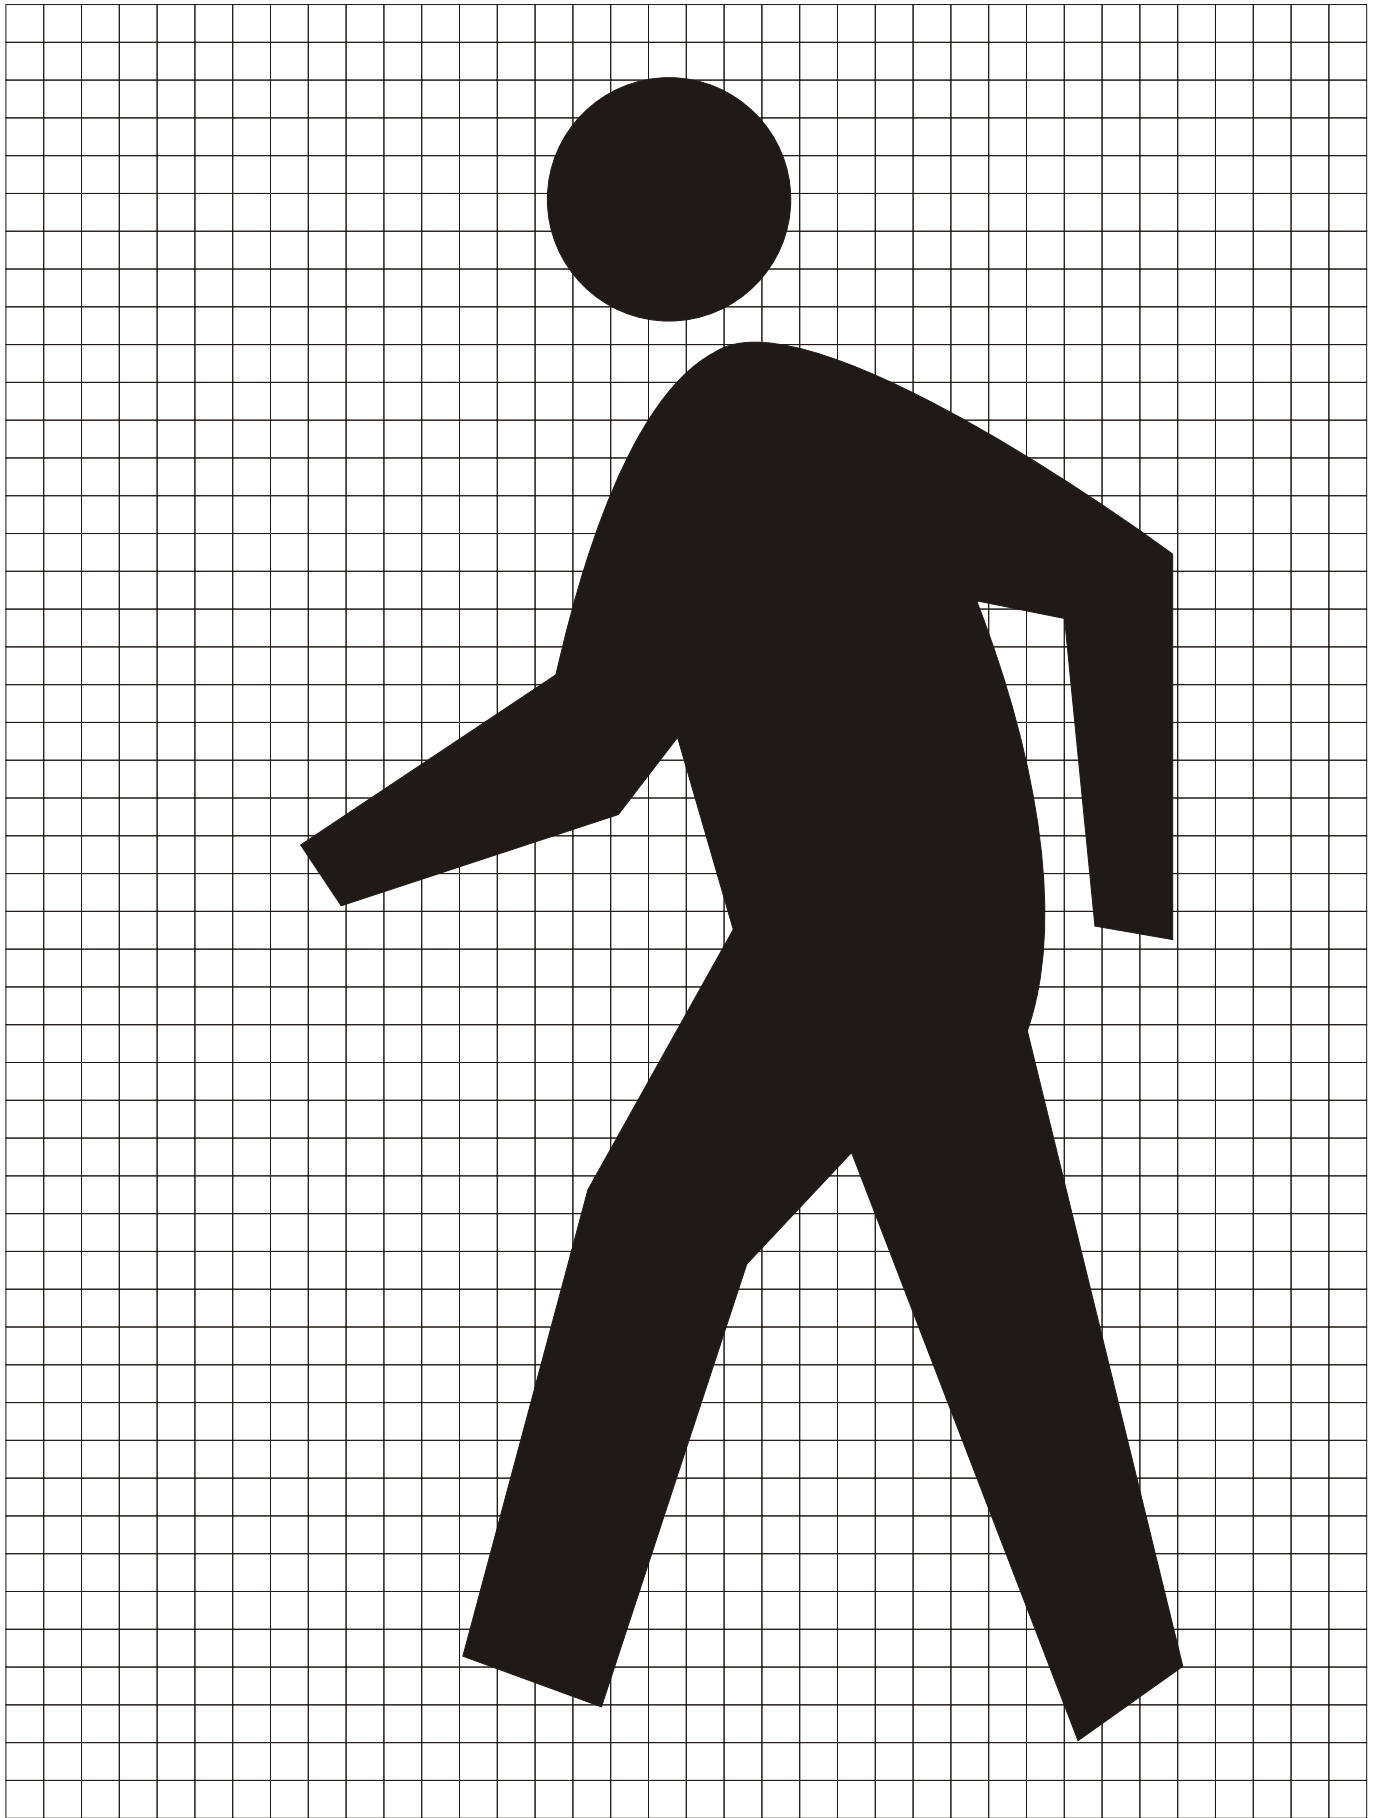

ADOT STANDARD ARROW HEAD DETAILS

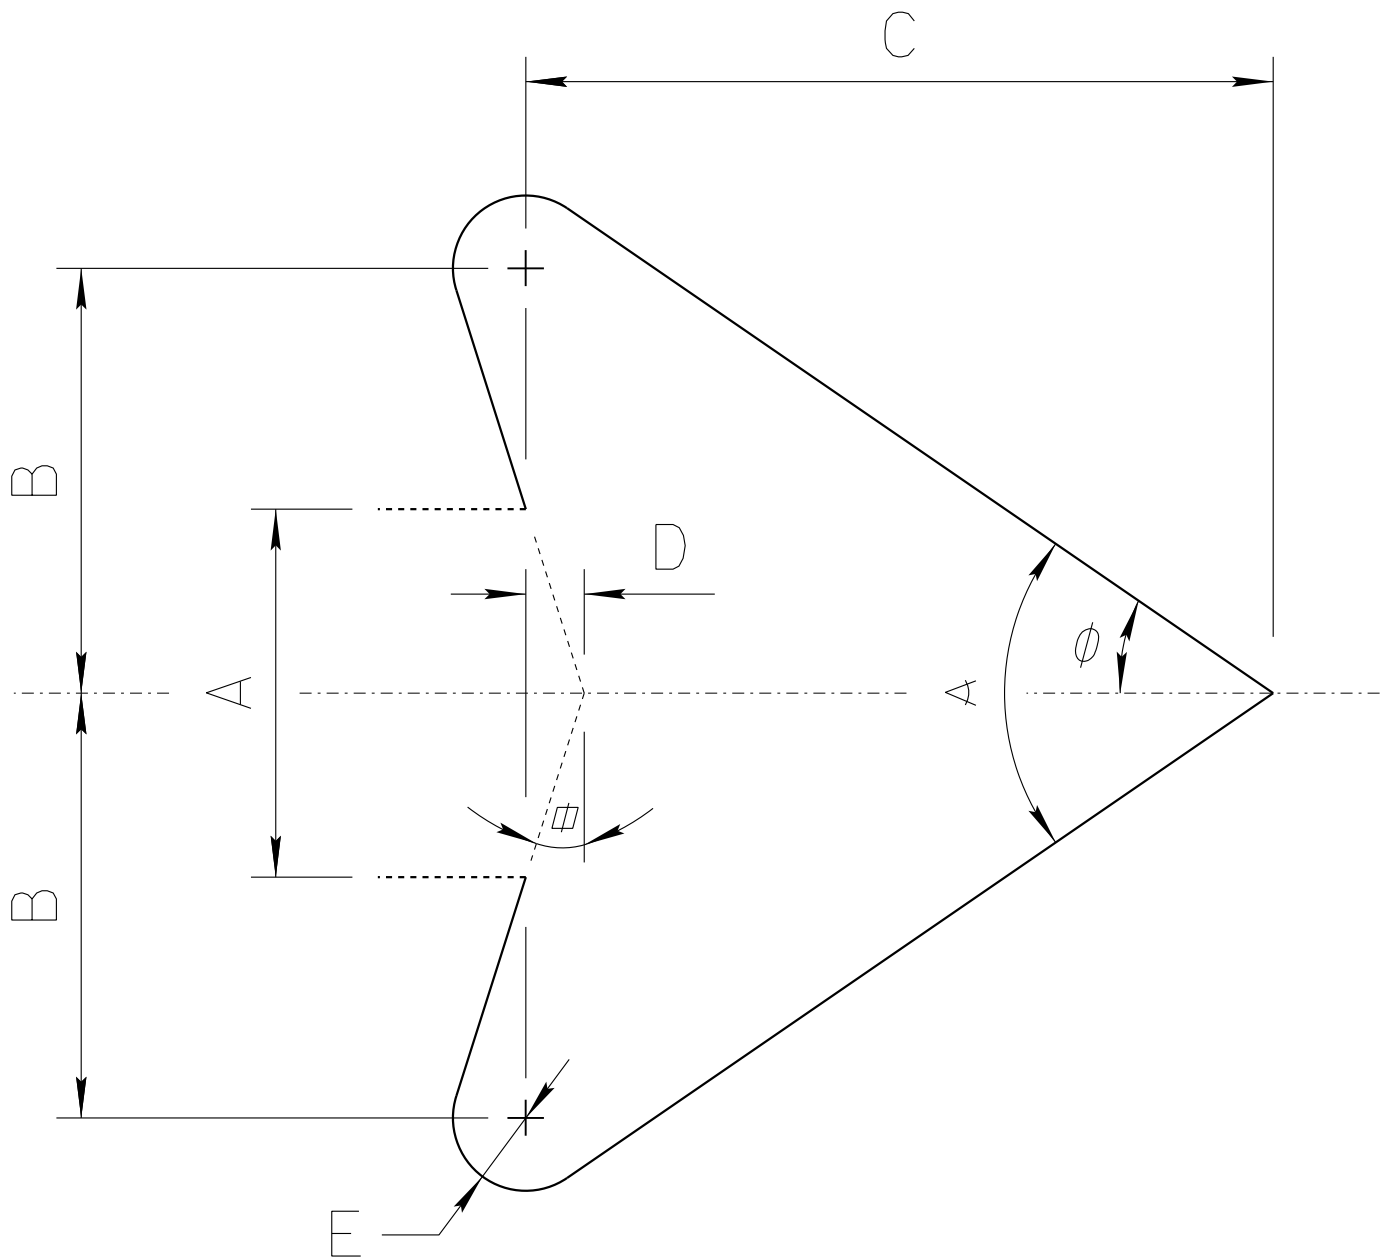

$A = \text{Arrow Shaft Stroke Width}$

$B = 1.15 \times A$

$C = 2.025 \times A$

$D = 0.16169 \times A$

$E = 0.2 \times A$

$\alpha = 17.92^\circ$

$\phi = 34.519^\circ$

$\alpha = 69.038^\circ$

ARIZONA DEPARTMENT OF TRANSPORTATION
TRAFFIC ENGINEERING GROUP

DRAWN:

L. LOPEZ

DATE:

AUGUST/2019