


CODE: R3-6L
 SIZE: 30" x 36"
 STANDARD



R03-06L(30x36-STD)WHT;
 1.875" Radius, 0.750" Border, 0.500" Indent, Black on White;
 K - Arrow, 3.5" Stroke;

ALL DIMENSIONS ARE IN INCHES

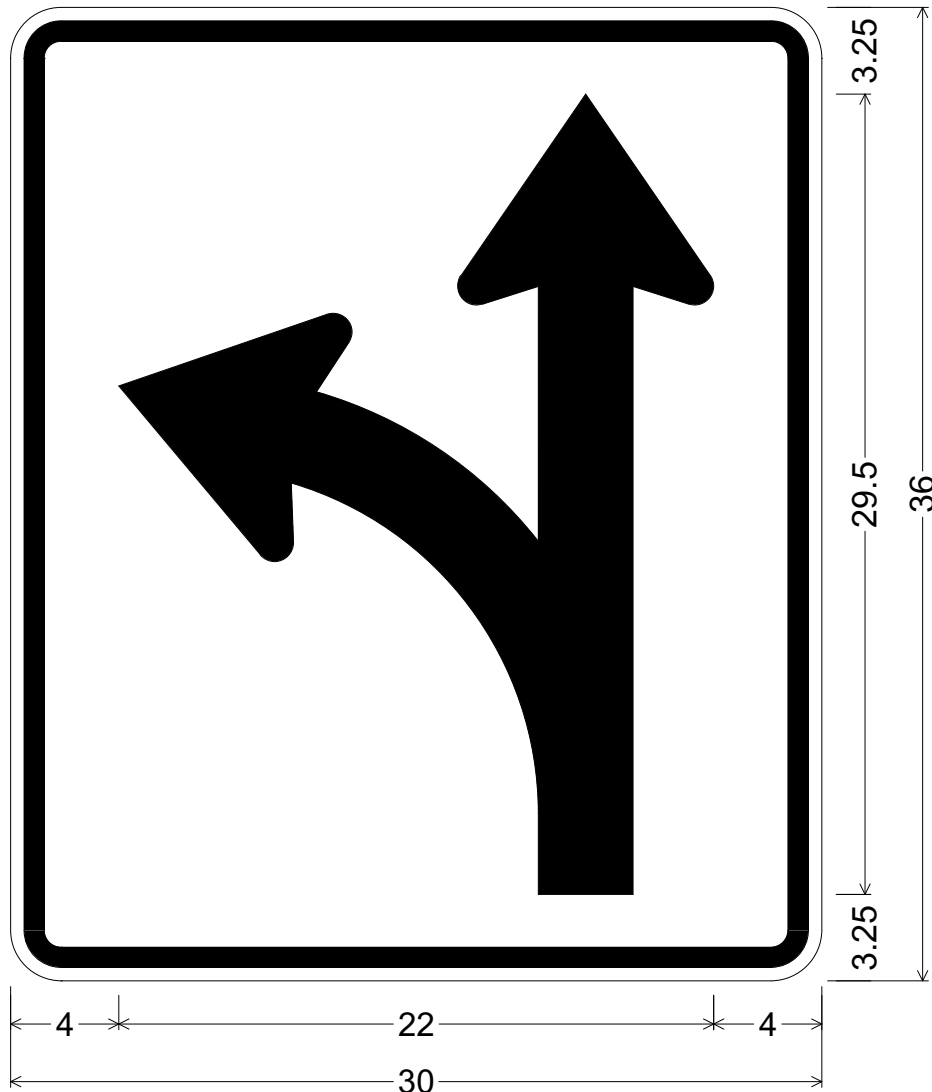

COLORS:
 ARROW GRAPHICS & BORDER - BLACK (NON-REFL)
 BACKGROUND - WHITE (REFL)


ARIZONA DEPARTMENT OF TRANSPORTATION
 TRAFFIC ENGINEERING GROUP

DRAWN:
 L. LOPEZ

DATE:
 JULY / 2015


APPROVED:
 SIGNATURE ON FILE

CODE: R3-6L
 SIZE: 48" x 60"
 SPECIAL

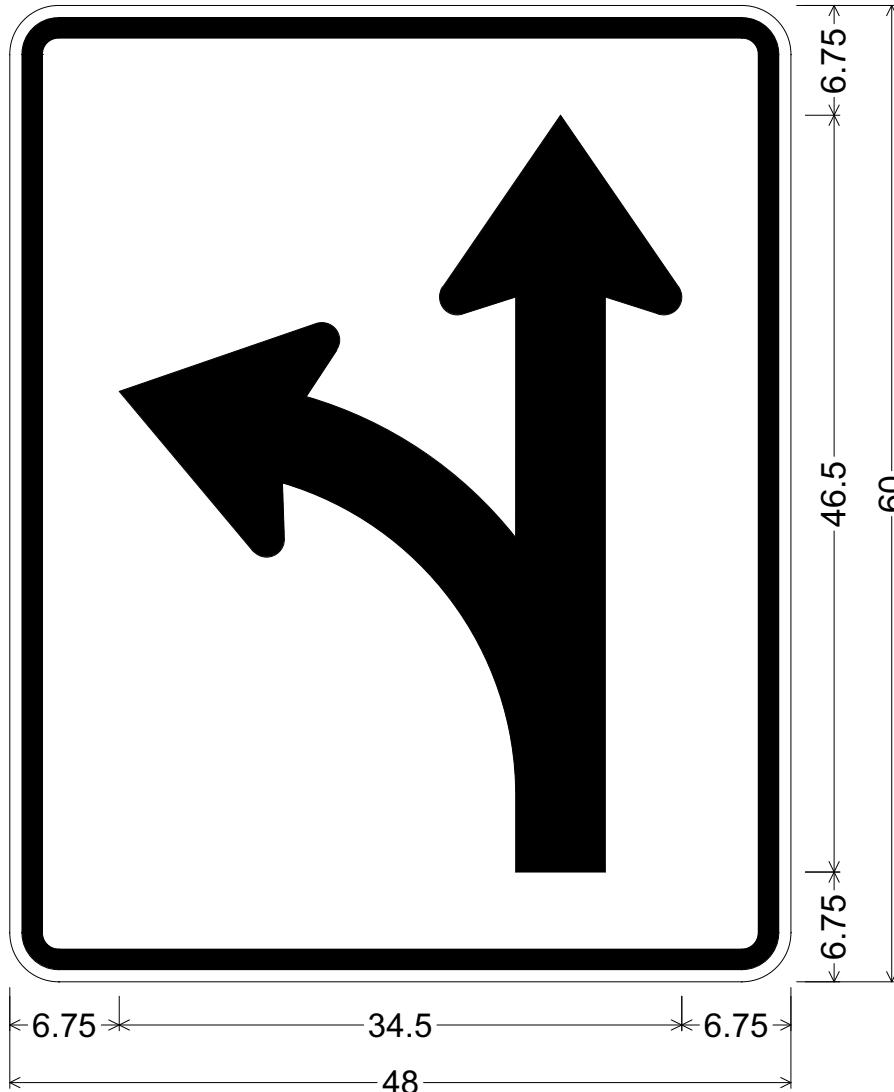


R03-06L(48x60-SPCL)WHT;
 3.000" Radius, 1.250" Border, 0.750" Indent, Black on White;
 K - Arrow, 5.5" Stroke;


ALL DIMENSIONS ARE IN INCHES

	COLORS: ARROW GRAPHICS & BORDER - BLACK (NON-REFL) BACKGROUND - WHITE (REFL)	ARIZONA DEPARTMENT OF TRANSPORTATION TRAFFIC ENGINEERING GROUP	
		DRAWN: L. LOPEZ	DATE: JULY / 2015
		APPROVED: SIGNATURE ON FILE	

ARROW CODE: K & Q
 Mirror for
 Q Arrow
 3.5" & 5.5"
 Stroke

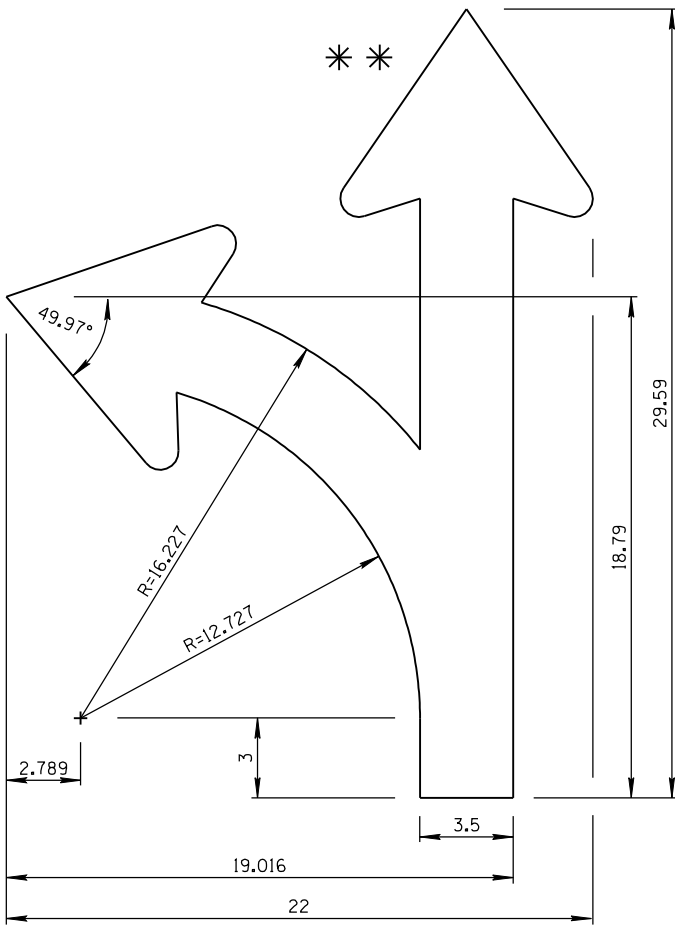

3.5" Stroke

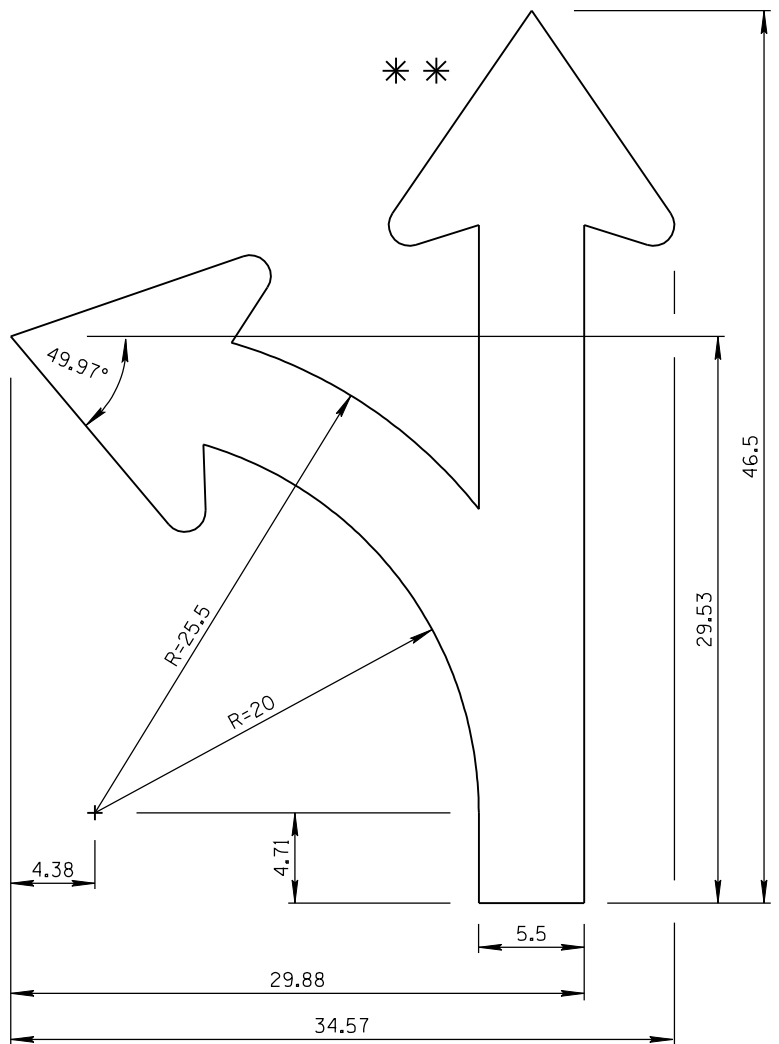


5.5" Stroke

** For arrowhead dimensions, see
 ADOT STANDARD ARROW HEAD DETAILS.

All dimensions are in inches. Length
 and width dimensions can be rounded
 to the nearest 1/8 inch.

ARIZONA DEPARTMENT OF TRANSPORTATION TRAFFIC ENGINEERING GROUP	
DRAWN: L. LOPEZ	DATE: JULY/2015

ADOT STANDARD ARROW HEAD DETAILS

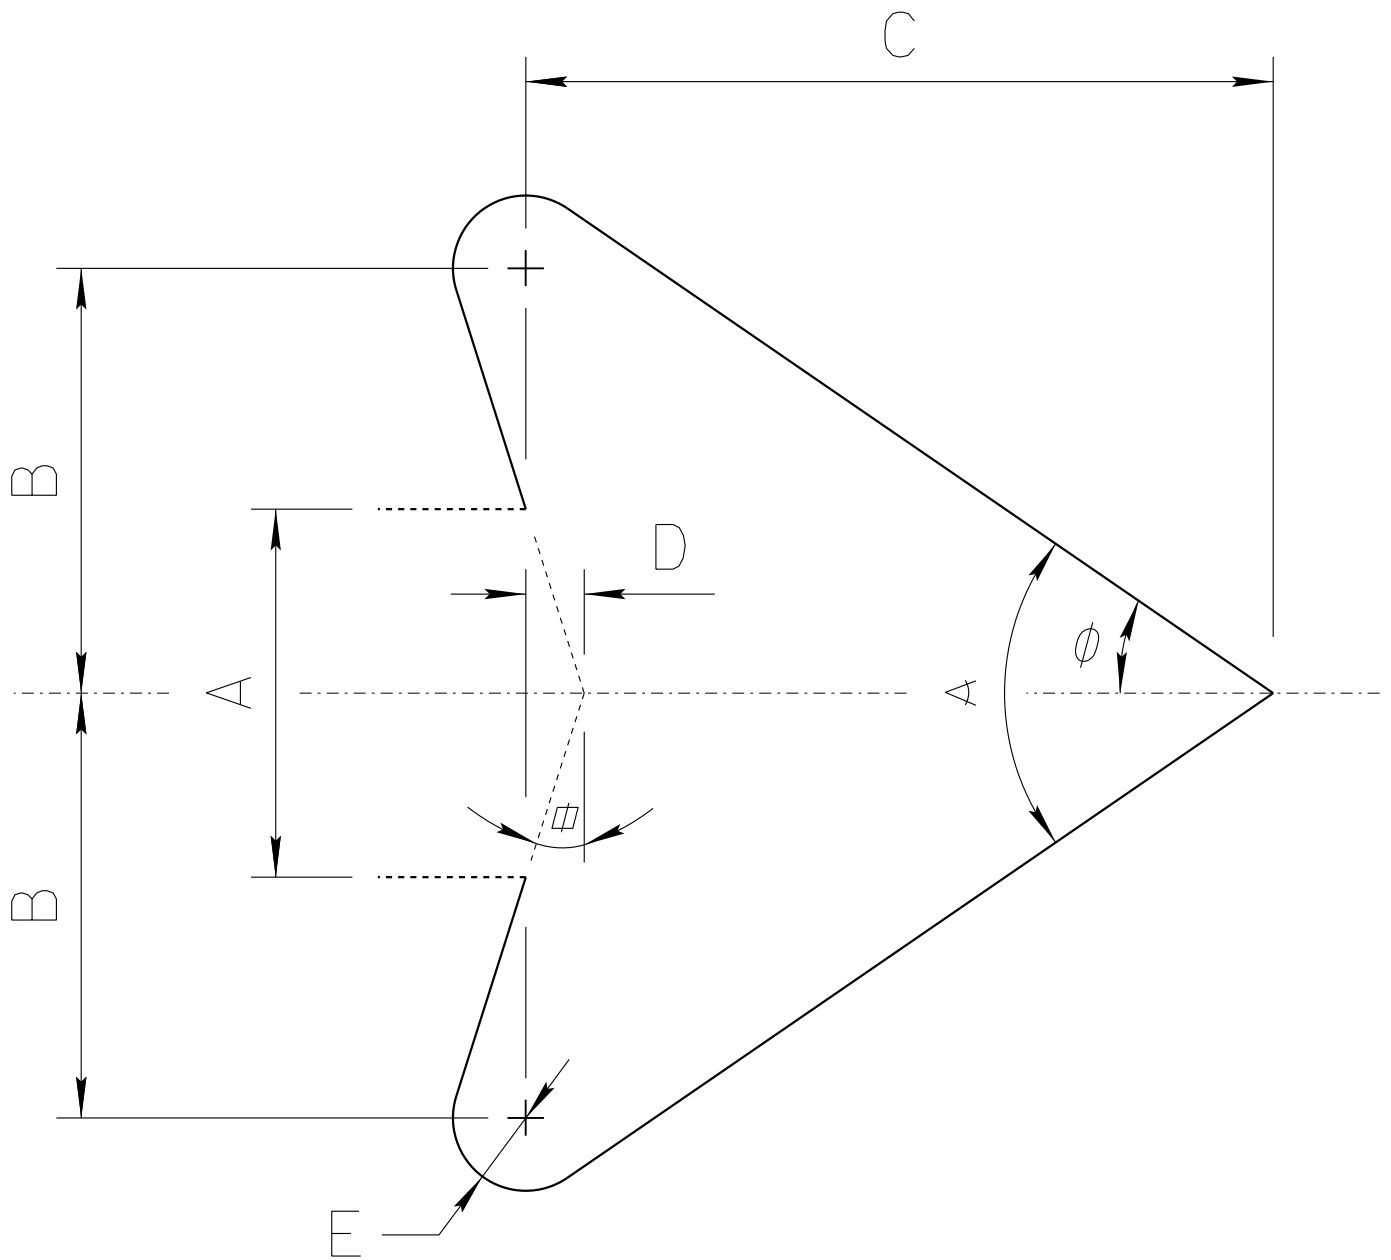

$A =$ Arrow Shaft Stroke Width

$B = 1.15 \times A$

$C = 2.025 \times A$

$D = 0.16169 \times A$

$E = 0.2 \times A$

$\alpha = 17.92^\circ$

$\phi = 34.519^\circ$

$\alpha = 69.038^\circ$

ARIZONA DEPARTMENT OF TRANSPORTATION
TRAFFIC ENGINEERING GROUP

DRAWN:

L. LOPEZ

DATE:

AUGUST/2019