

CODE: R4-8a

SIZE: 18" x 24"
MINIMUM



R04-08a(18x24-MIN)WHT;
1.500" Radius, 0.625" Border, 0.375" Indent, Black on White;
"KEEP" D;
Standard Arrow Custom 12.000" X 6.000" 180°;
"LEFT" D;

ALL DIMENSIONS ARE IN INCHES



COLORS:

LEGEND & BORDER - BLACK (NON-REFL)
BACKGROUND - WHITE (REFL)

ARIZONA DEPARTMENT OF TRANSPORTATION
TRAFFIC ENGINEERING GROUP

DRAWN:

L. LOPEZ

DATE:



DECEMBER / 2012

APPROVED:

SIGNATURE ON FILE

CODE: R4-8a

SIZE: 24" x 30"
STANDARD

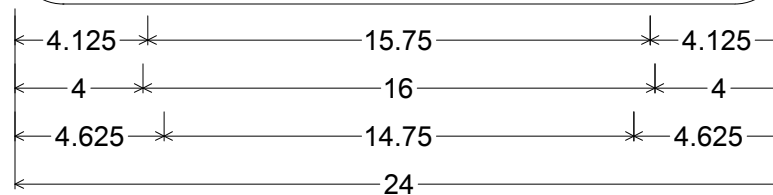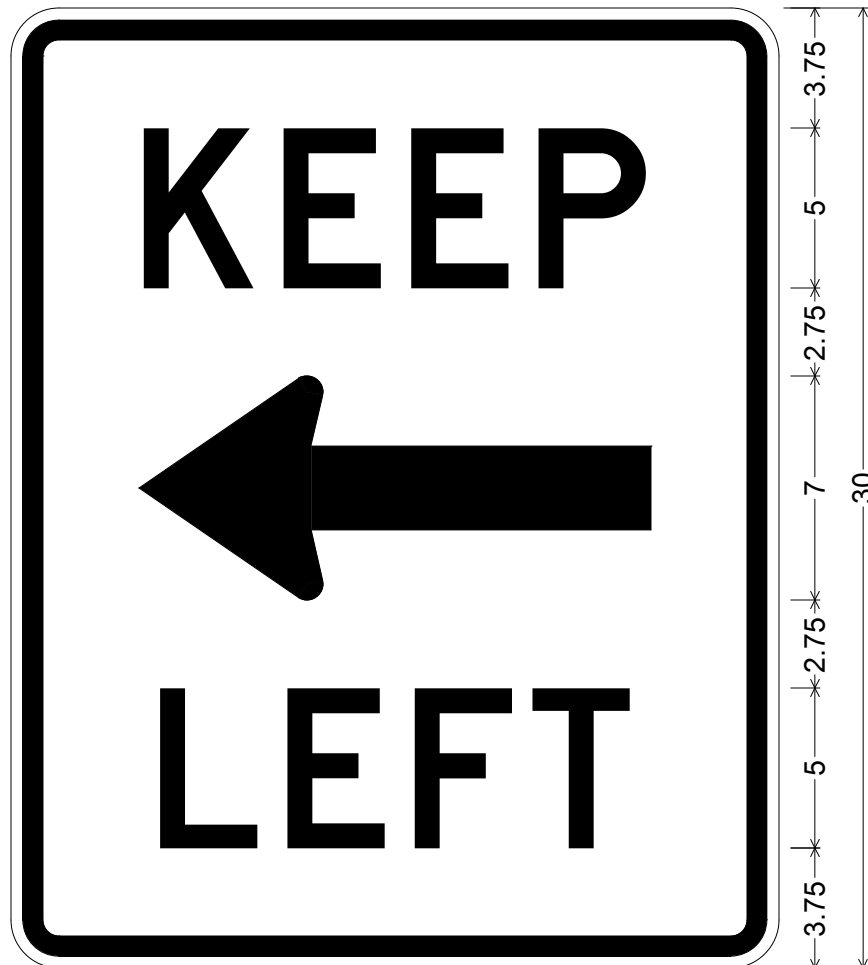

R04-08a(24x30-STD)WHT;

1.500" Radius, 0.625" Border, 0.375" Indent, Black on White;

"KEEP" D;

Standard Arrow Custom 16.000" X 7.000" 180°; "LEFT" D;

ALL DIMENSIONS ARE IN INCHES



COLORS:

LEGEND & BORDER - BLACK (NON-REFL)

BACKGROUND - WHITE (REFL)

ARIZONA DEPARTMENT OF TRANSPORTATION
TRAFFIC ENGINEERING GROUP

DRAWN:

L. LOPEZ

DATE:


DECEMBER / 2012

APPROVED:

SIGNATURE ON FILE

CODE: R4-8a

SIZE: 36" x 48"
EXPRESSWAY

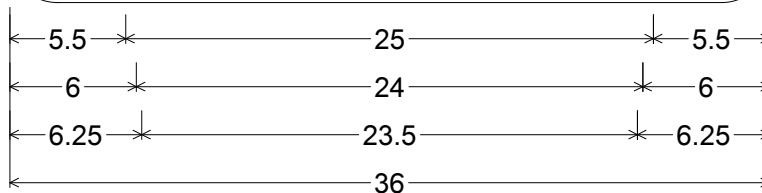

R04-08a(36x48-EXPWY)WHT;
 2.250" Radius, 0.875" Border, 0.625" Indent, Black on White;
 "KEEP" D specified length;
 Standard Arrow Custom 24.000" X 12.000" 180°;
 "LEFT" D;

ALL DIMENSIONS ARE IN INCHES



COLORS:

LEGEND & BORDER - BLACK (NON-REFL)
 BACKGROUND - WHITE (REFL)

ARIZONA DEPARTMENT OF TRANSPORTATION
 TRAFFIC ENGINEERING GROUP

DRAWN:

L. LOPEZ

DATE:



DECEMBER / 2012

APPROVED:

SIGNATURE ON FILE

CODE: R4-8a

SIZE: 48" x 60"
FREEWAY

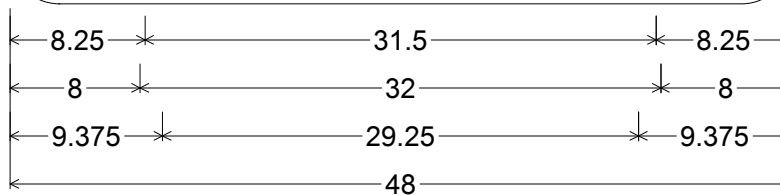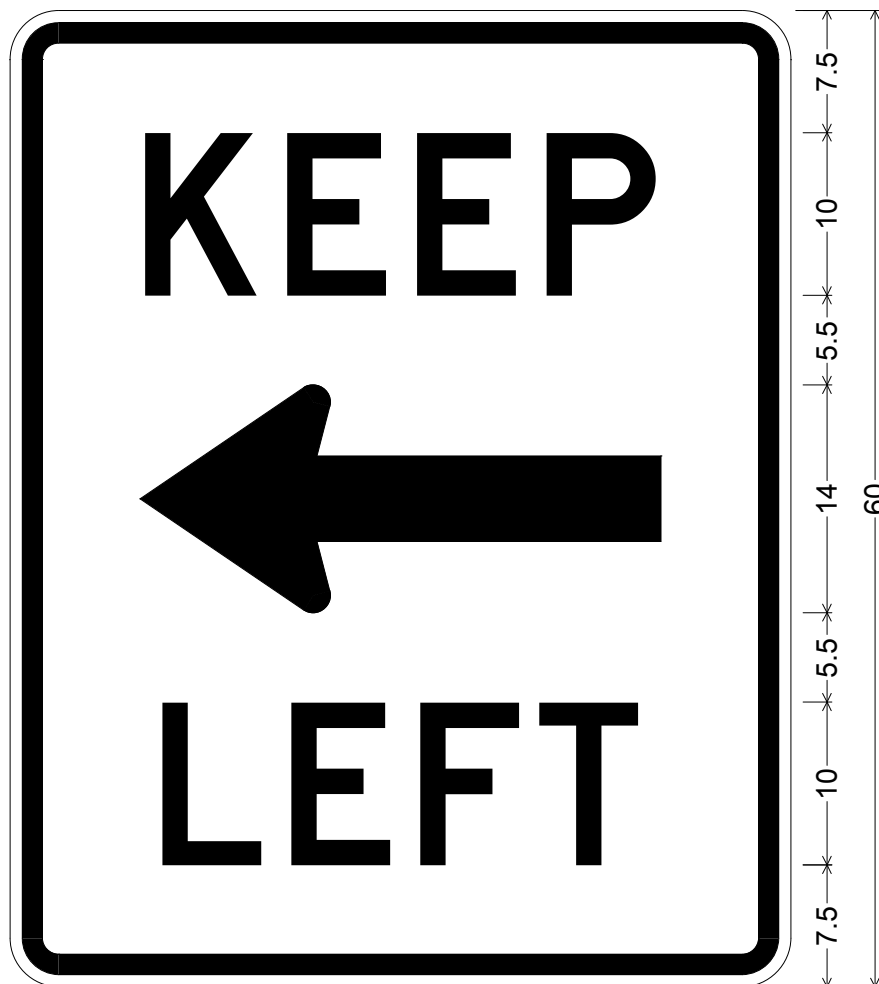

R04-08a(48x60-FWY)WHT;
3.000" Radius, 1.250" Border, 0.750" Indent, Black on White;
"KEEP" D;
Standard Arrow Custom 32.000" X 14.000" 180°;
"LEFT" D specified length;

ALL DIMENSIONS ARE IN INCHES



COLORS:

LEGEND & BORDER - BLACK (NON-REFL)
BACKGROUND - WHITE (REFL)

ARIZONA DEPARTMENT OF TRANSPORTATION
TRAFFIC ENGINEERING GROUP

DRAWN:

L. LOPEZ


DATE:

DECEMBER / 2012

APPROVED:

SIGNATURE ON FILE

STANDARD ARROW DETAILS

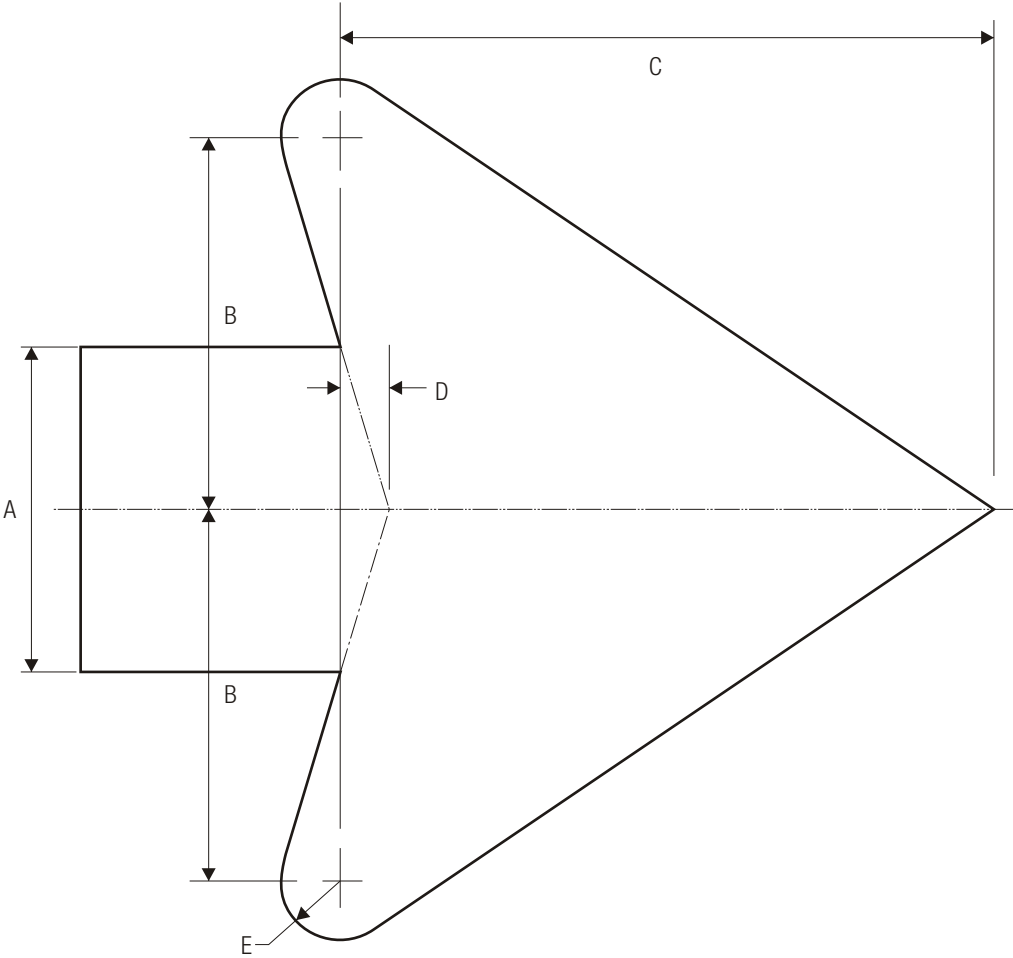

A	B	C	D	E
2	2.313	4.063	.313	.375
2.25	2.625	4.5	.375	.438
2.5	2.875	5.063	.375	.5
2.625	3	5.25	.375	.5
2.75	3	5.563	.438	.563
3	3.5	6.125	.438	.563
3.125	3.625	6.375	.5	.625
3.25	3.75	6.625	.5	.625
3.313	3.813	6.688	.5	.688
3.5	4	7.125	.563	.688
3.75	4.313	7.625	.563	.75
4	4.625	8.125	.625	.813
4.063	4.75	8.25	.625	.813
4.25	4.875	8.625	.625	.813
4.375	5	8.875	.688	.875
4.5	5.188	9.125	.688	.875

A	B	C	D	E
4.75	5.438	9.625	.75	1
4.875	5.625	9.875	.75	1
5	5.75	10.125	.75	1
5.25	6	10.625	.813	1.063
5.5	6.375	11.125	.875	1.125
5.75	6.625	11.688	.875	1.125
6	6.875	12.188	.938	1.188
6.5	7.5	13.188	1	1.625
7	8	14.188	1.063	1.375
7.5	8.625	15.188	1.125	1.5
8	9.188	16.25	1.25	1.625