

W1-4bL

W1-4bR

TWO LANE REVERSE CURVE

\*Reduce W1-4 Arrow 30%.

**C**


A	B	C	D	E	F	G	H	J	K	L
24	.375	.625	2.121	5.123	7.685	5.123	1.040	6.164	2.080	1.5
30	.5	.75	2.241	6.805	10.247	6.805	1.401	7.645	2.802	1.875
36	.625	.875	3.042	8.526	12.889	8.446	1.741	9.847	3.482	2.25
48	.75	1.25	4.242	10.246	15.37	10.246	2.08	12.328	4.16	3

TTC SIGN COLORS:

LEGEND — BLACK

BACKGROUND— ORANGE (RETROREFLECTIVE)

# ADOT STANDARD ARROW HEAD DETAILS

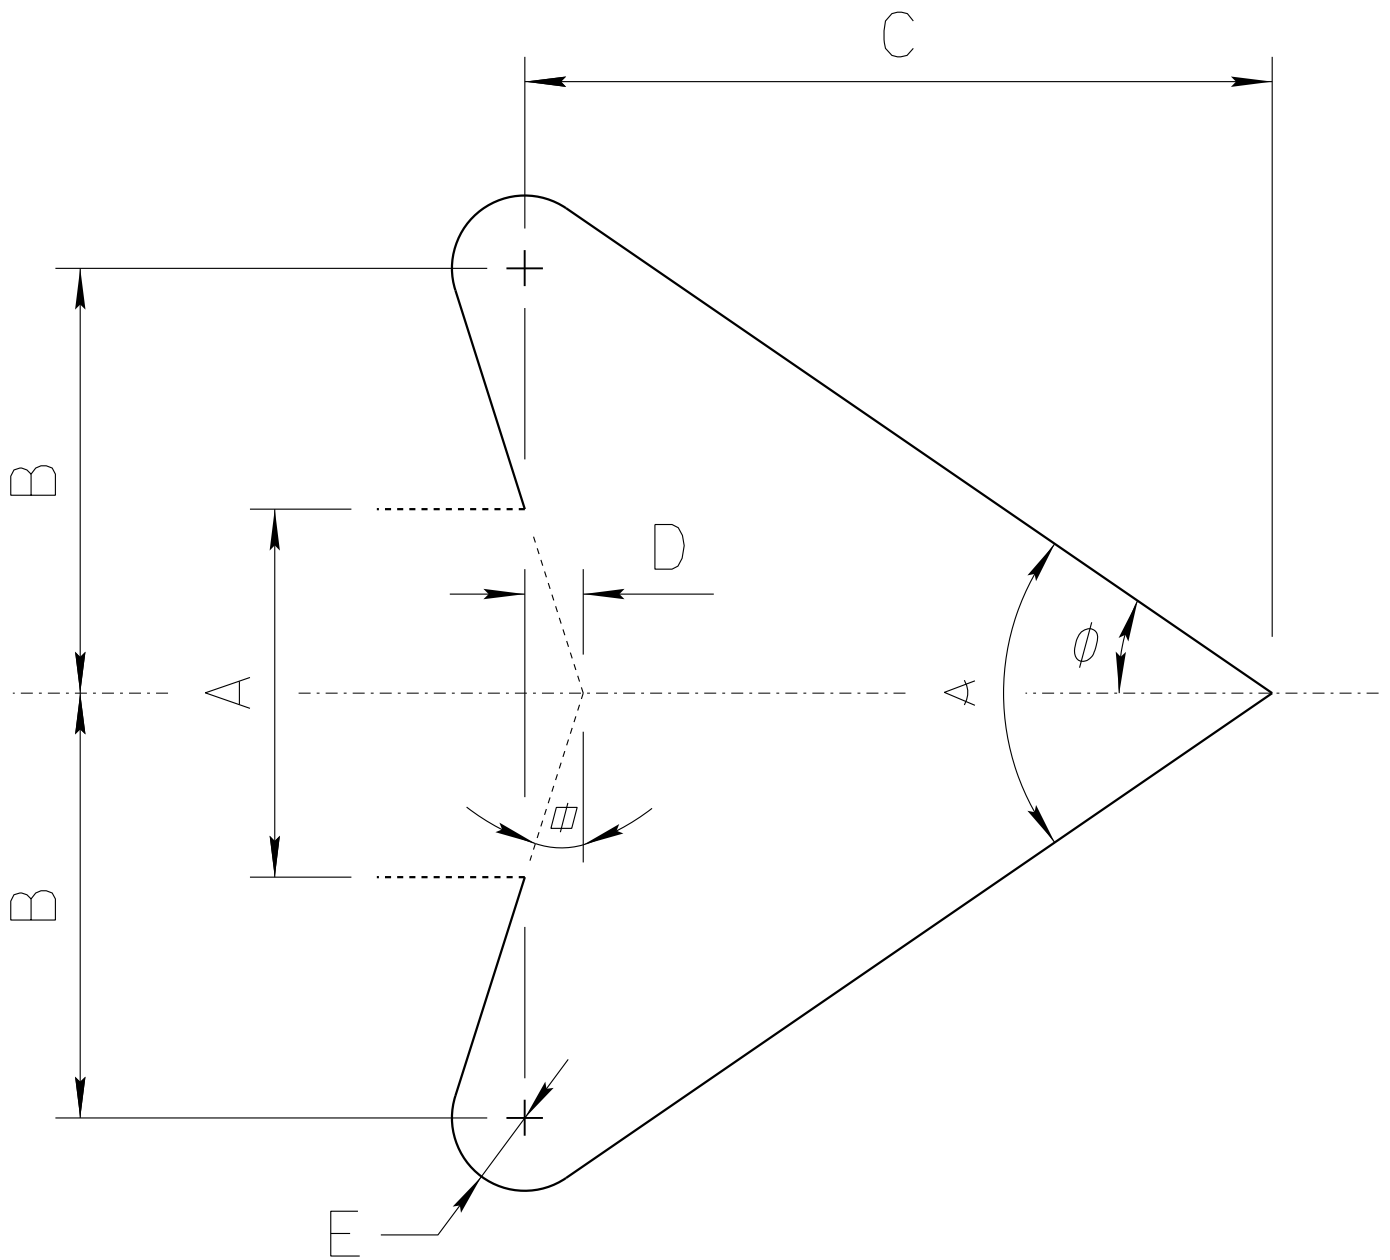

$A = \text{Arrow Shaft Stroke Width}$

$B = 1.15 \times A$

$C = 2.025 \times A$

$D = 0.16169 \times A$

$E = 0.2 \times A$

$\alpha = 17.92^\circ$

$\phi = 34.519^\circ$

$\angle = 69.038^\circ$

ARIZONA DEPARTMENT OF TRANSPORTATION  
TRAFFIC ENGINEERING GROUP

DRAWN:

L. LOPEZ

DATE:

AUGUST/2019