


C

A	B	C	D	E	F	G	H	J	K	L	M
30	.5	.75	9.287	10.167	8.606	10.327	1.875	3.202	8.406	9.447	8.966
36	.625	.875	11.128	12.209	10.327	12.409	2.25	3.842	10.087	11.328	10.768
48	.75	1.25	14.851	16.252	13.770	16.532	3	5.123	13.450	15.131	14.330

N	P	Q	R	S
8.366	8.966	9.447	5.284	8.486
10.047	10.768	11.328	6.324	10.167
13.370	14.330	15.131	8.446	13.570

COLORS: LEGEND – BLACK
BACKGROUND– YELLOW (RETROREFLECTIVE)

ADOT STANDARD ARROW HEAD DETAILS

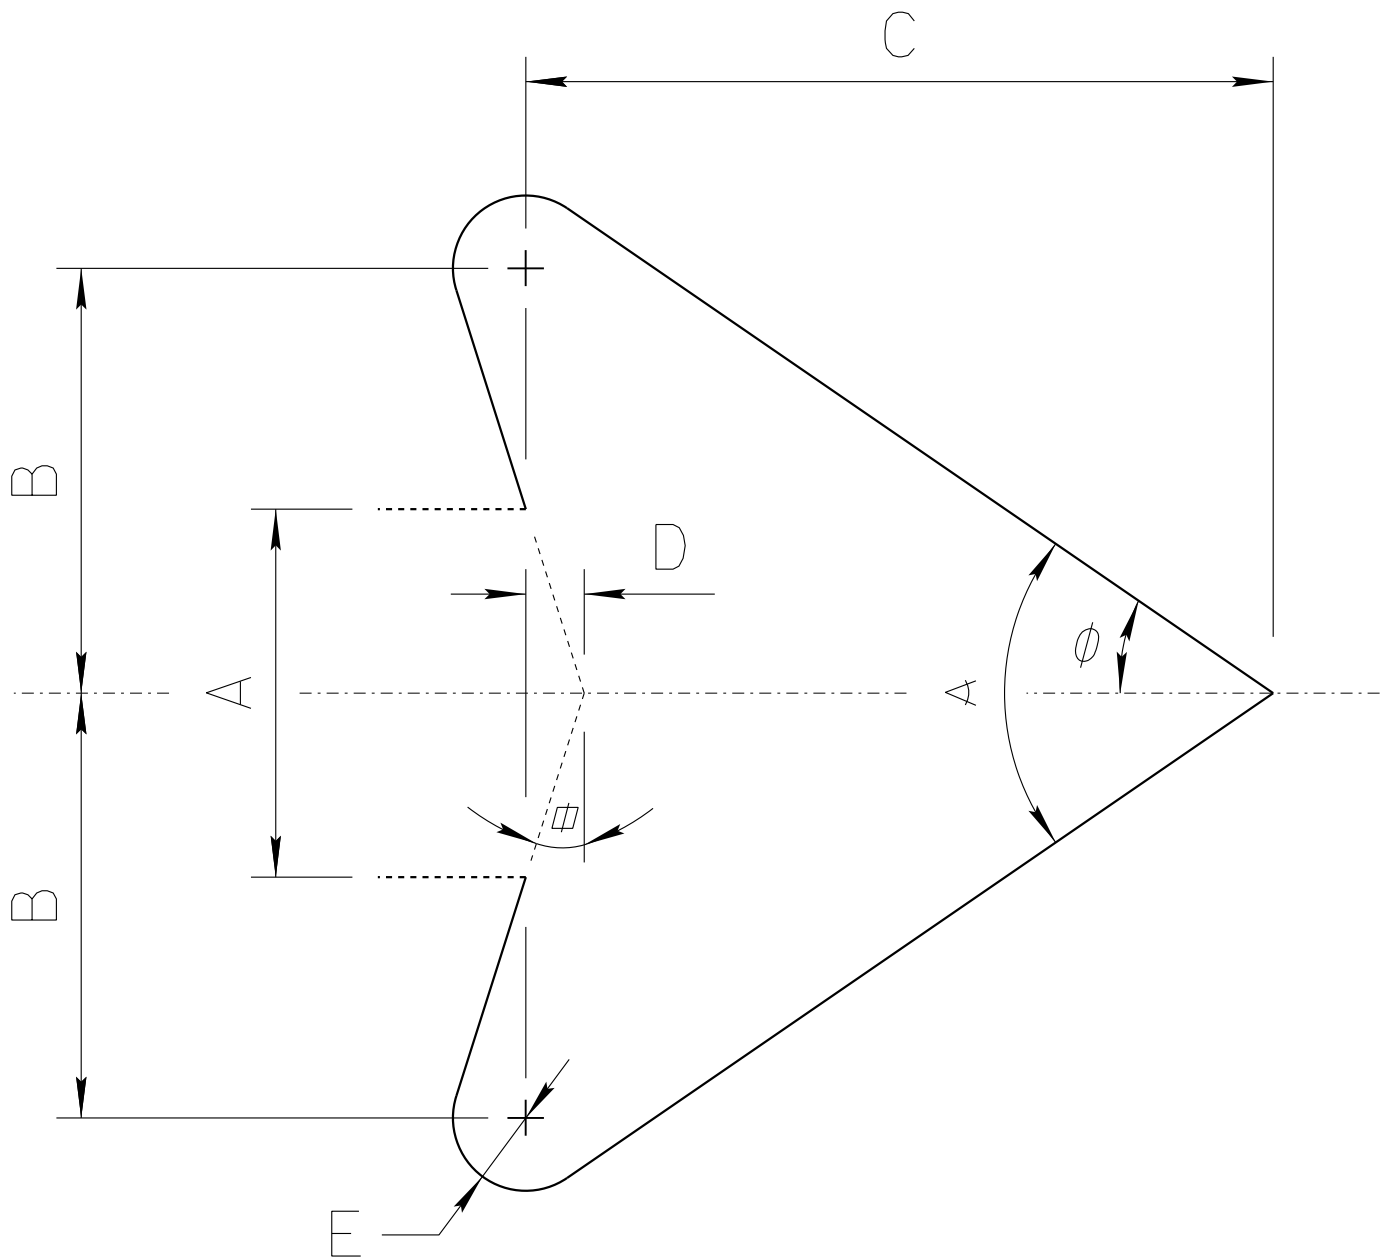

$A = \text{Arrow Shaft Stroke Width}$

$B = 1.15 \times A$

$C = 2.025 \times A$

$D = 0.16169 \times A$

$E = 0.2 \times A$

$\alpha = 17.92^\circ$

$\phi = 34.519^\circ$

$\alpha = 69.038^\circ$

ARIZONA DEPARTMENT OF TRANSPORTATION
TRAFFIC ENGINEERING GROUP

DRAWN:

L. LOPEZ

DATE:

AUGUST/2019