

W24-1aR

W24-1aL

DOUBLE REVERSE CURVE (2 LINES)

DOUBLE REVERSE CURVE (2 LINES)

*Reduce arrow from W24-1 40%.

C


A	B	C	D	E	F	G	H	J	K	L
30	.5	.75	11.408	10.407	2	3.242	1.881	2.882	4.243	1.875
36	.625	.875	13.690	12.489	2.401	3.882	2.241	3.442	5.083	2.25
48	.75	1.25	18.252	16.652	3.202	5.202	3.042	4.642	6.804	3

TTC SIGN COLORS:

SYMBOL – BLACK

BACKGROUND– ORANGE (RETROREFLECTIVE)

ADOT STANDARD ARROW HEAD DETAILS

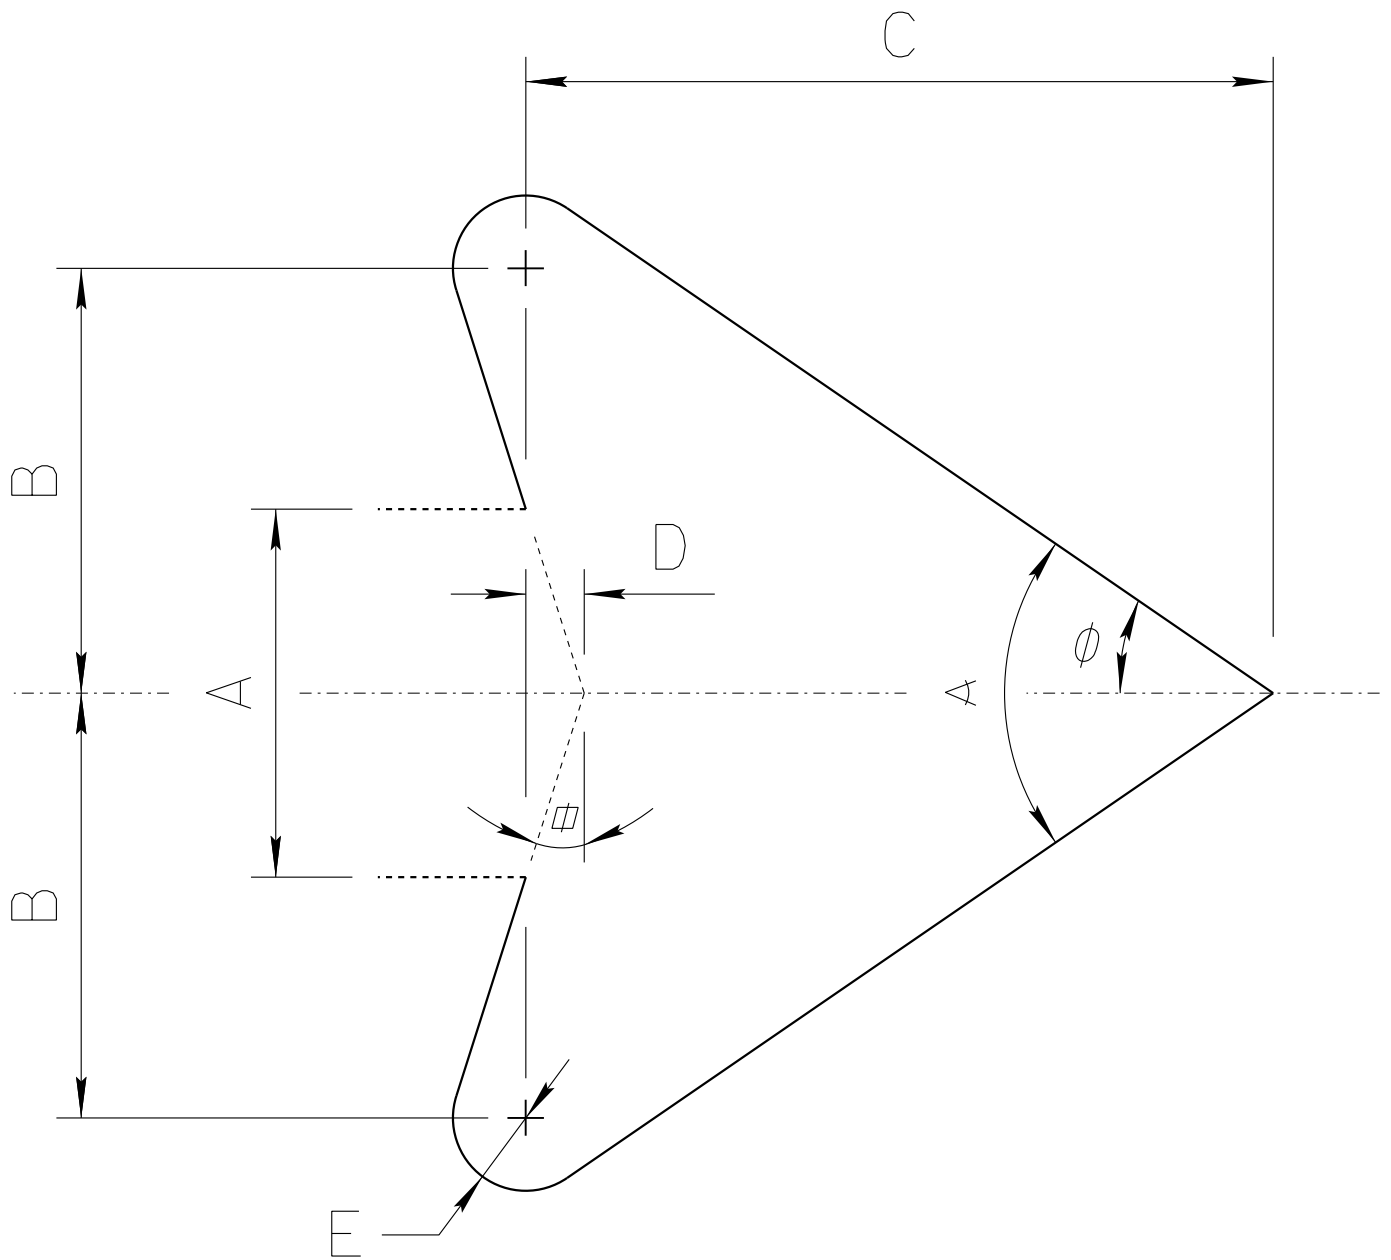

$A =$ Arrow Shaft Stroke Width

$B = 1.15 \times A$

$C = 2.025 \times A$

$D = 0.16169 \times A$

$E = 0.2 \times A$

$\alpha = 17.92^\circ$

$\phi = 34.519^\circ$

$\angle = 69.038^\circ$

ARIZONA DEPARTMENT OF TRANSPORTATION
TRAFFIC ENGINEERING GROUP

DRAWN:

L. LOPEZ

DATE:

AUGUST/2019