

Sign width varies based on destination(s). Sign width varies in even foot increments.


If sign width is an issue, reduce edge or text spacing or use Series C.

CODE: D3-2r


SIZE: VAR x 30"
MINIMUM

* Center entire legend package (text, arrow) horizontally on each panel or sub-panel.

For use only on roadways with a posted speed of 40 mph or less.

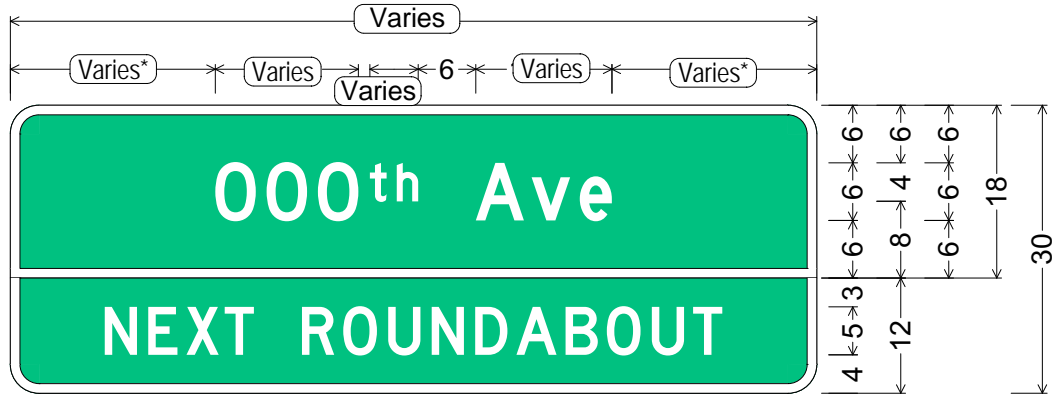

D3-2r (conventional road - 6");
 3.00" Radius, 1.00" Border, White on Green;
 "000th Ave" D;
 3.00" Radius, 1.00" Border, White on Green;
 "NEXT ROUNDABOUT" D;

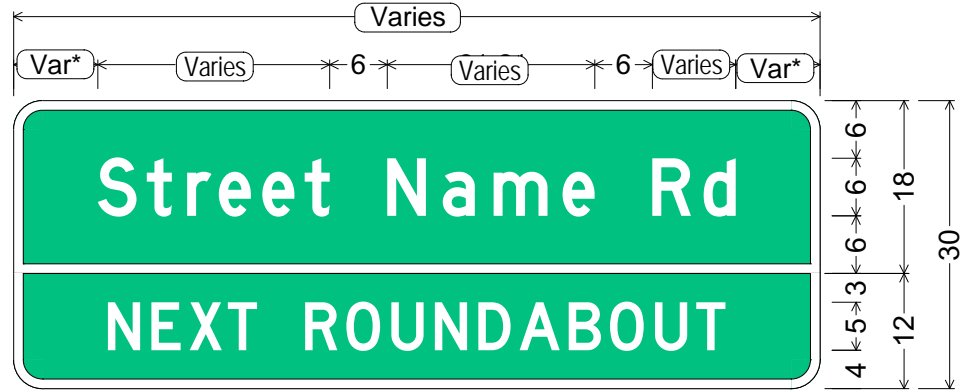

D3-2r (conventional road - 6");
 3.00" Radius, 1.00" Border, White on Green;
 "Street Name Rd" D;
 3.00" Radius, 1.00" Border, White on Green;
 "NEXT ROUNDABOUT" D;

ALL DIMENSIONS ARE IN INCHES



COLORS:
 LEGEND & BORDER - WHITE (REFL)
 BACKGROUND - GREEN (REFL)

ARIZONA DEPARTMENT OF TRANSPORTATION
 TRAFFIC ENGINEERING GROUP

DRAWN: R. C. MOEUR DATE: NOVEMBER / 2015

APPROVED: SIGNATURE ON FILE

Sign width varies based on destination(s). Sign width varies in even foot increments.


If sign width is an issue, reduce edge or text spacing or use Series C.

CODE: D3-2r


SIZE: VAR x 30"
MINIMUM

* Center entire legend package (shields, text, arrow) horizontally on each panel or sub-panel.

For use only on roadways with a posted speed of 40 mph or less.

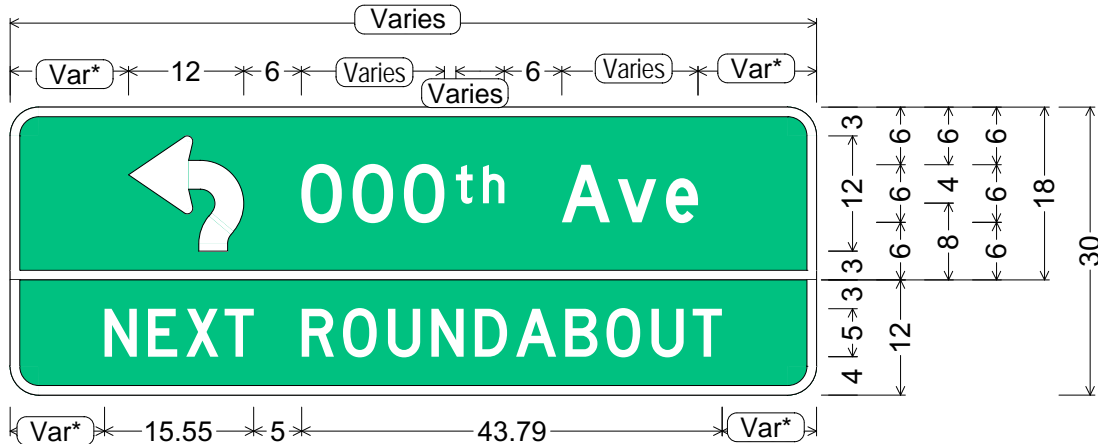

D3-2r (conventional road - 6");
 3.00" Radius, 1.00" Border, White on Green;
 90 Deg Advance Turn Arrow 6" Type C2; "000th Ave" D;
 3.00" Radius, 1.00" Border, White on Green;
 "NEXT ROUNDABOUT" D;

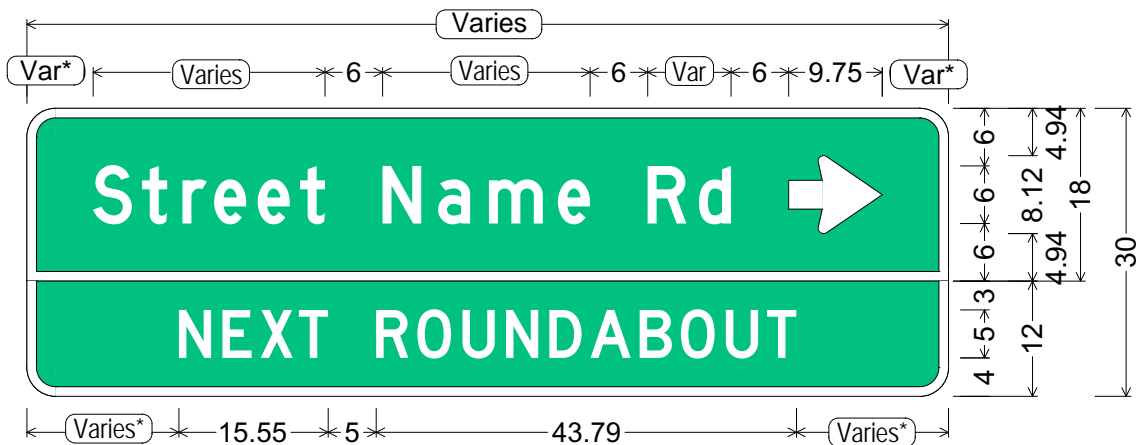

D3-2r (conventional road - 6");
 3.00" Radius, 1.00" Border, White on Green;
 "Street Name Rd" D; Arrow 6" Type D1 - 0°;
 3.00" Radius, 1.00" Border, White on Green;
 "NEXT ROUNDABOUT" D;

ALL DIMENSIONS ARE IN INCHES



COLORS:

LEGEND & BORDER - WHITE (REFL)
 BACKGROUND - GREEN (REFL)

ARIZONA DEPARTMENT OF TRANSPORTATION
 TRAFFIC ENGINEERING GROUP

DRAWN:
 R. C. MOEUR

DATE:
 NOVEMBER / 2015

APPROVED:
 SIGNATURE ON FILE

Sign width varies based on destination(s). Sign width varies in even foot increments.

If sign width is an issue, reduce edge or text spacing or use Series C.

On multi-line signs, horizontally center destination text groupings relative to one another.

* Center entire legend package (shields, text, arrow) horizontally on each panel or sub-panel.

CODE: D3-2r

SIZE: VAR x 48"
MINIMUM

For use only on roadways with a posted speed of 40 mph or less.



D3-2r (conventional road - 6");
 3.00" Radius, 1.00" Border, White on Green;
 90 Deg Advance Turn Arrow 12.00" X 12.00";
 "Alpha Ave" D;
 3.00" Radius, 1.00" Border, White on Green;
 "Bravo Blvd" D; Arrow 6" Type D1 - 9.75" 0°;
 3.00" Radius, 1.00" Border, White on Green;
 "NEXT ROUNDABOUT" D;

ALL DIMENSIONS ARE IN INCHES



COLORS:
 LEGEND & BORDER - WHITE (REFL)
 BACKGROUND - GREEN (REFL)

ARIZONA DEPARTMENT OF TRANSPORTATION
 TRAFFIC ENGINEERING GROUP

DRAWN: R. C. MOEUR	DATE: NOVEMBER / 2015
-----------------------	--------------------------

APPROVED:
 SIGNATURE ON FILE

Sign width varies based on destination(s). Sign width varies in 6" increments.


If sign width is an issue, use Series B.

CODE: D3-2r


SIZE: VAR x 30"
MIN-NARROW

* Center entire legend package (text, arrow) horizontally on each panel or sub-panel.

For use only on roadways with a posted speed of 40 mph or less and a width-constrained condition
(narrow median, etc.)

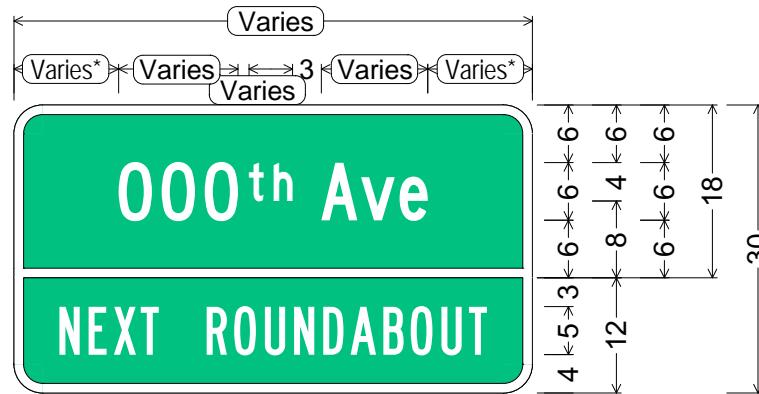

(Var*) 10.34 5 29.2 (Var*)
 D3-2r (conventional road - 6" - narrow);
 3.00" Radius, 1.00" Border, White on Green;
 "000th" C; "Ave" C 50% spacing;
 3.00" Radius, 1.00" Border, White on Green;
 "NEXT ROUNDABOUT" B;

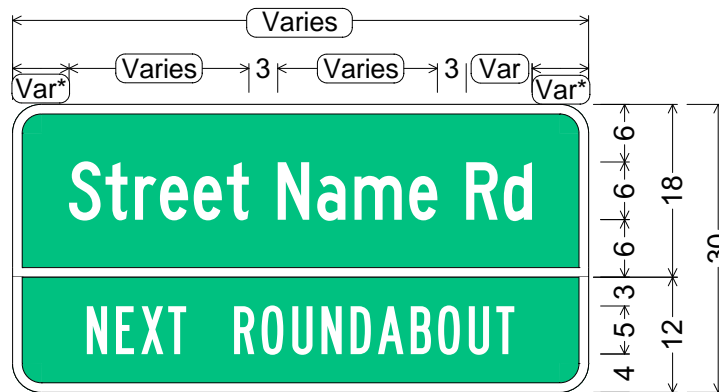

(Var*) 10.34 5 29.2 (Var*)
 D3-2r (conventional road - 6" - narrow);
 3.00" Radius, 1.00" Border, White on Green;
 "Street Name Rd" C 50% spacing;
 3.00" Radius, 1.00" Border, White on Green;
 "NEXT ROUNDABOUT" B;

ALL DIMENSIONS ARE IN INCHES



COLORS:

LEGEND & BORDER - WHITE (REFL)
 BACKGROUND - GREEN (REFL)

ARIZONA DEPARTMENT OF TRANSPORTATION
 TRAFFIC ENGINEERING GROUP

DRAWN:

R. C. MOEUR

DATE:

NOVEMBER / 2015

APPROVED:

SIGNATURE ON FILE

Sign width varies based on destination(s). Sign width varies in 6" increments.


If sign width is an issue, use Series B.

CODE: D3-2r


SIZE: VAR x 30"
MIN-NARROW

* Center entire legend package (text, arrow) horizontally on each panel or sub-panel.

For use only on roadways with a posted speed of 40 mph or less and a width-constrained condition
(narrow median, etc.)

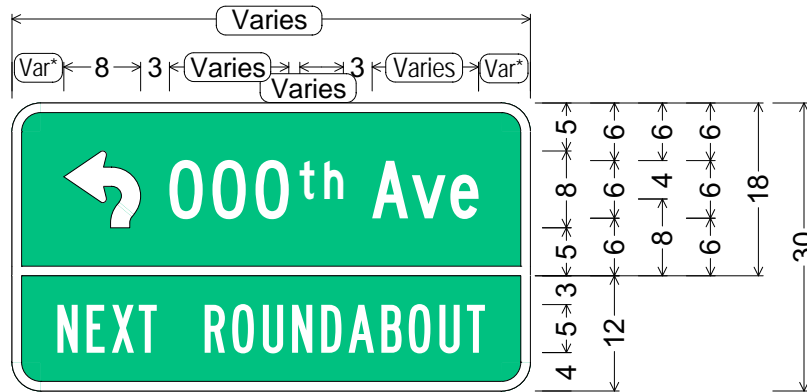

10.34 5 29.2
 Var* D3-2r (conventional road - 6" - narrow);
 3.00" Radius, 1.00" Border, White on Green;
 90 Deg Advance Turn Arrow 4" Type C2;
 "000th" C; "Ave" C 50% spacing;
 3.00" Radius, 1.00" Border, White on Green;
 "NEXT ROUNDABOUT" B;

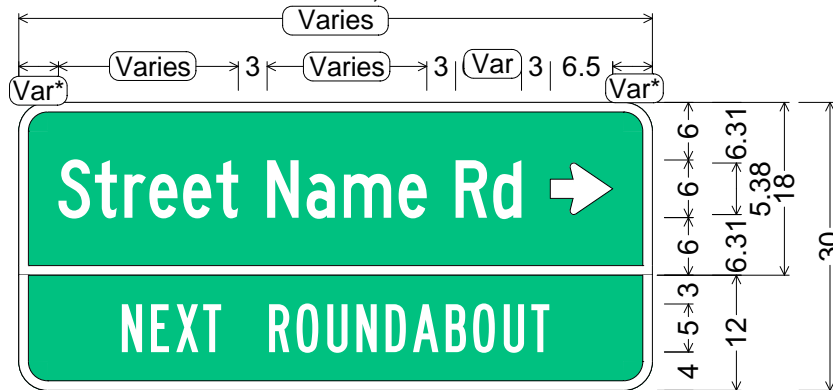

Var* 10.34 5 29.2 Var*
 D3-2r (conventional road - 6" - narrow);
 3.00" Radius, 1.00" Border, White on Green;
 "Street Name Rd" C 50% spacing;
 Arrow 4" Type D1 - 0°;
 3.00" Radius, 1.00" Border, White on Green;
 "NEXT ROUNDABOUT" B;

ALL DIMENSIONS ARE IN INCHES



COLORS:
 LEGEND & BORDER - WHITE (REFL)
 BACKGROUND - GREEN (REFL)

ARIZONA DEPARTMENT OF TRANSPORTATION
 TRAFFIC ENGINEERING GROUP

DRAWN: R. C. MOEUR DATE: NOVEMBER / 2015

APPROVED: SIGNATURE ON FILE

Sign width varies based on destination(s). Sign width varies in 6" increments.

If sign width is an issue, use Series B.


On multi-line signs, horizontally center destination text groupings relative to one another.

* Center entire legend package (text, arrow) horizontally on each panel or sub-panel.

CODE: D3-2r

SIZE: VAR x 48"
MIN-NARROW

For use only on roadways with a posted speed of 40 mph or less and a width-constrained condition
(narrow median, etc.)

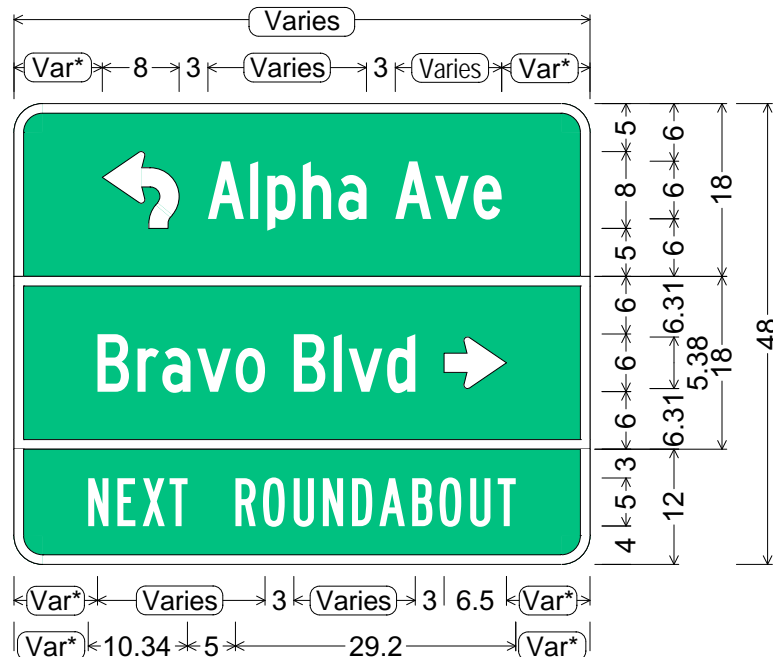

D3-2r (conventional road - 6" - narrow);
 3.00" Radius, 1.00" Border, White on Green;
 90 Deg Advance Turn Arrow 4" Type C2;
 "Alpha Ave" C 50% spacing;
 3.00" Radius, 1.00" Border, White on Green;
 "Bravo Blvd" C 50% spacing;
 Arrow 4" Type D1 - 0°;
 3.00" Radius, 1.00" Border, White on Green;
 "NEXT ROUNDABOUT" B;

ALL DIMENSIONS ARE IN INCHES

	<p>COLORS:</p> <p>LEGEND & BORDER - WHITE (REFL)</p> <p>BACKGROUND - GREEN (REFL)</p>	<p>ARIZONA DEPARTMENT OF TRANSPORTATION TRAFFIC ENGINEERING GROUP</p>	
		<p>DRAWN:</p> <p style="text-align: center;">R. C. MOEUR</p>	<p>DATE:</p> <p style="text-align: center;">NOVEMBER / 2015</p>
		<p>APPROVED:</p> <p style="text-align: center;">SIGNATURE ON FILE</p>	

Sign width varies based on destination(s). Sign width varies in even foot increments.


If sign width is an issue, reduce edge or text spacing or use Series C.

CODE: D2-3r

SIZE: VAR x 36"
STANDARD

* Center entire legend package (shields, text, arrow) horizontally on each panel or sub-panel.

For use on roadways with posted speeds of 45 mph or greater.

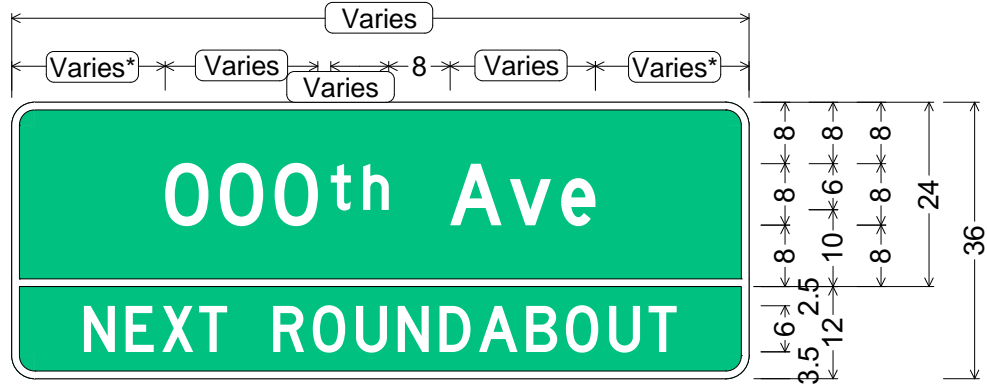


D3-2r (conventional road - 8");

3.00" Radius, 1.00" Border, White on Green;

"000th Ave" D;

3.00" Radius, 1.00" Border, White on Green;

"NEXT ROUNDABOUT" D;

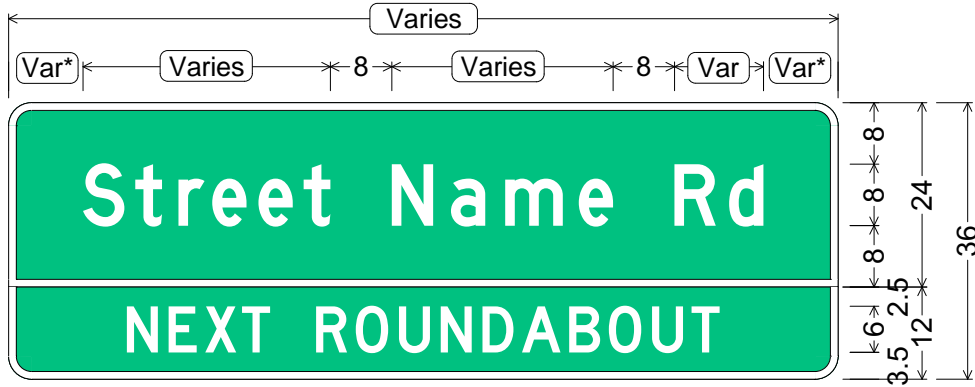

D3-2r (conventional road - 8");

3.00" Radius, 1.00" Border, White on Green;

"Street Name Rd" D;

3.00" Radius, 1.00" Border, White on Green;

"NEXT ROUNDABOUT" D;

ALL DIMENSIONS ARE IN INCHES



COLORS:

LEGEND & BORDER - WHITE (REFL)

BACKGROUND - GREEN (REFL)

ARIZONA DEPARTMENT OF TRANSPORTATION
TRAFFIC ENGINEERING GROUP

DRAWN:

R. C. MOEUR

DATE:

NOVEMBER / 2015

APPROVED:

SIGNATURE ON FILE

Sign width varies based on destination(s). Sign width varies in even foot increments.


If sign width is an issue, reduce edge or text spacing or use Series C.

CODE: D2-3r

SIZE: VAR x 36"
STANDARD

* Center entire legend package (shields, text, arrow) horizontally on each panel or sub-panel.

For use on roadways with posted speeds of 45 mph or greater.

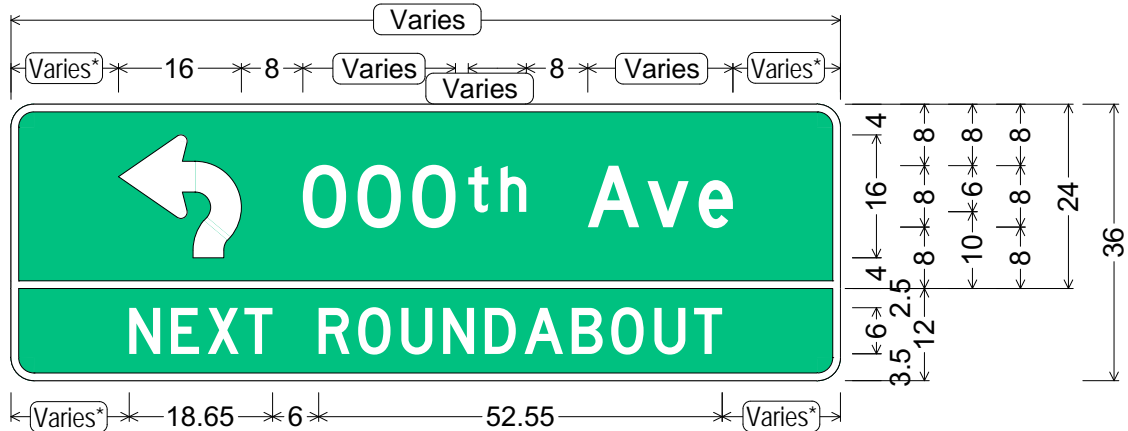


D3-2r (conventional road - 8");

3.00" Radius, 1.00" Border, White on Green;

90 Deg Advance Turn Arrow 16.00" X 16.00"; "000th Ave" D;

3.00" Radius, 1.00" Border, White on Green;

"NEXT ROUNDABOUT" D;

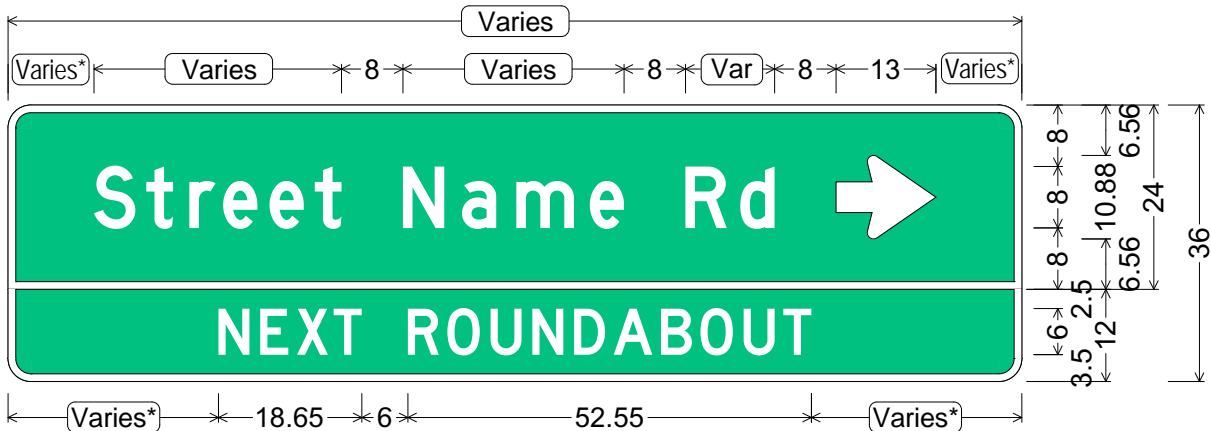

D3-2r (conventional road - 8");

3.00" Radius, 1.00" Border, White on Green;

"Street Name Rd" D; Arrow 8" Type D1 - 13.00" 0°;

3.00" Radius, 1.00" Border, White on Green;

"NEXT ROUNDABOUT" D;

ALL DIMENSIONS ARE IN INCHES



COLORS:

LEGEND & BORDER - WHITE (REFL)
BACKGROUND - GREEN (REFL)

ARIZONA DEPARTMENT OF TRANSPORTATION
TRAFFIC ENGINEERING GROUP

DRAWN:

R. C. MOEUR

DATE:

NOVEMBER / 2015

APPROVED:

SIGNATURE ON FILE

Sign width varies based on destination(s). Sign width varies in even foot increments.

If sign width is an issue, reduce edge or text spacing or use Series C.


On multi-line signs, horizontally center destination text groupings relative to one another.

* Center entire legend package (shields, text, arrow) horizontally on each panel or sub-panel.

CODE: D2-3r

SIZE: VAR x 48"
STANDARD

For use on roadways with posted speeds of 45 mph or greater.

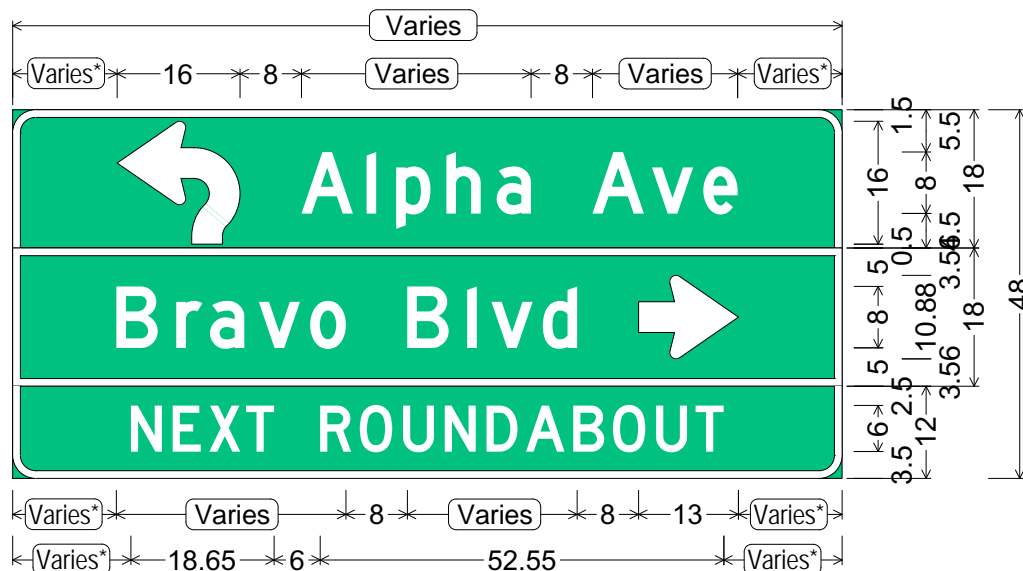

D3-2r (conventional road - 8");

3.00" Radius, 1.00" Border, White on Green;

90 Deg Advance Turn Arrow 16.00" X 16.00"; "Alpha Ave" D;

3.00" Radius, 1.00" Border, White on Green;

"Bravo Blvd" D; Arrow 8" Type D1 - 13.00" 0°;

3.00" Radius, 1.00" Border, White on Green;

"NEXT ROUNDABOUT" D;

ALL DIMENSIONS ARE IN INCHES



COLORS:

LEGEND & BORDER - WHITE (REFL)
BACKGROUND - GREEN (REFL)

ARIZONA DEPARTMENT OF TRANSPORTATION
TRAFFIC ENGINEERING GROUP

DRAWN:
R. C. MOEUR

DATE:
NOVEMBER / 2015

APPROVED:
SIGNATURE ON FILE

Sign width varies based on destination(s). Sign width varies in 6" increments.


If sign width is an issue, use Series B.

CODE: D2-3r


SIZE: VAR x 36"
STD-NARROW

* Center entire legend package (text, arrow) horizontally on each panel or sub-panel.

For use on roadways with posted speeds of 45 mph or greater and a width-constrained condition
(narrow median, etc.)

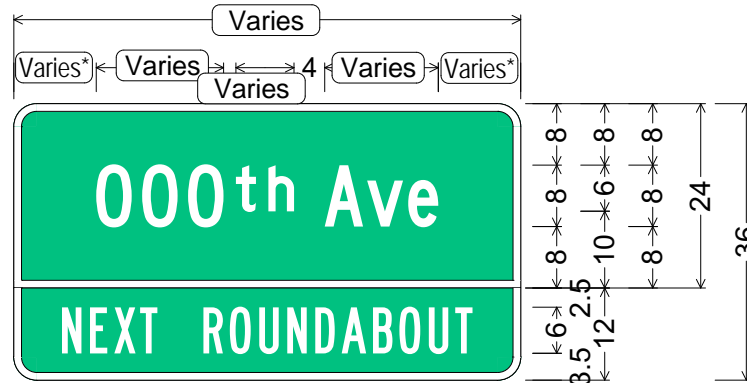

Var* 12.42 6 35.04 Var*
D3-2r (conventional road - 8" - narrow);
3.00" Radius, 1.00" Border, White on Green;
"000" C "th" D; "Ave" C 50% spacing;
3.00" Radius, 1.00" Border, White on Green;
"NEXT ROUNDABOUT" B;

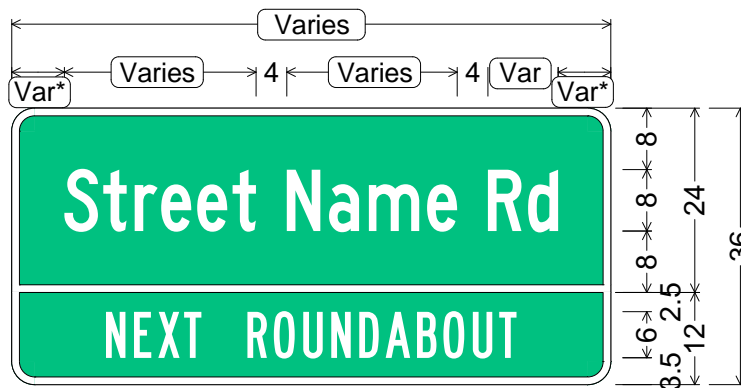

Var* 12.42 6 35.04 Var*
D3-2r (conventional road - 8" - narrow);
3.00" Radius, 1.00" Border, White on Green;
"Street Name Rd" C 50% spacing;
3.00" Radius, 1.00" Border, White on Green;
"NEXT ROUNDABOUT" B;

ALL DIMENSIONS ARE IN INCHES



COLORS:

LEGEND & BORDER - WHITE (REFL)
BACKGROUND - GREEN (REFL)

ARIZONA DEPARTMENT OF TRANSPORTATION
TRAFFIC ENGINEERING GROUP

DRAWN:

R. C. MOEUR

DATE:

NOVEMBER / 2015

APPROVED:

SIGNATURE ON FILE

Sign width varies based on destination(s). Sign width varies in 6" increments.


If sign width is an issue, use Series B.

CODE: D2-3r

SIZE: VAR x 36"
STD-NARROW


* Center entire legend package (text, arrow) horizontally on each panel or sub-panel.

For use on roadways with posted speeds of 45 mph or greater and a width-constrained condition
(narrow median, etc.)

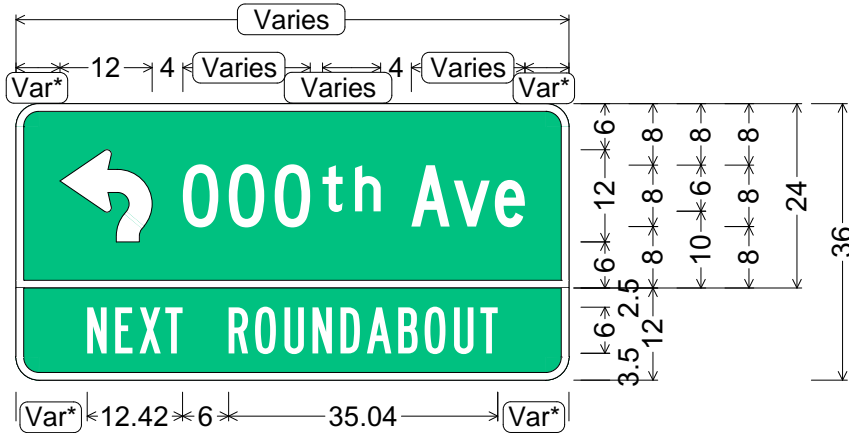

(Var*) 12.42 6 35.04 (Var*)

D3-2r (conventional road - 8" - narrow);
3.00" Radius, 1.00" Border, White on Green;
90 Deg Advance Turn Arrow 6" Type C2;
"000" C "th" D; "Ave" C 50% spacing;
3.00" Radius, 1.00" Border, White on Green;
"NEXT ROUNDABOUT" B;

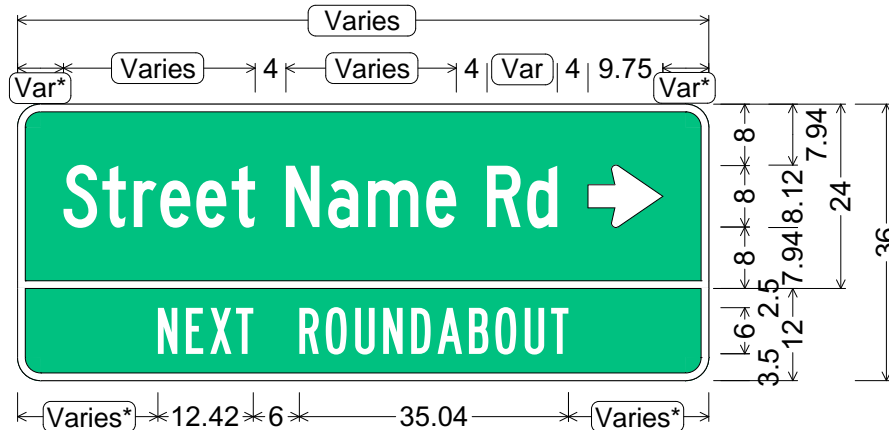

(Varies*) 12.42 6 35.04 (Varies*)

D3-2r (conventional road - 8" - narrow);
3.00" Radius, 1.00" Border, White on Green;
"Street Name Rd" C 50% spacing;
Arrow 6" Type D1 - 0°;
3.00" Radius, 1.00" Border, White on Green;
"NEXT ROUNDABOUT" B;

ALL DIMENSIONS ARE IN INCHES



COLORS:

LEGEND & BORDER - WHITE (REFL)
BACKGROUND - GREEN (REFL)

ARIZONA DEPARTMENT OF TRANSPORTATION
TRAFFIC ENGINEERING GROUP

DRAWN:
R. C. MOEUR

DATE:
NOVEMBER / 2015

APPROVED:
SIGNATURE ON FILE

Sign width varies based on destination(s). Sign width varies in 6" increments.

If sign width is an issue, use Series B.


On multi-line signs, horizontally center destination text groupings relative to one another.

* Center entire legend package (text, arrow) horizontally on each panel or sub-panel.

CODE: D2-3r

SIZE: VAR x 48"
STD-NARROW

For use on roadways with posted speeds of 45 mph or greater and a width-constrained condition
(narrow median, etc.)

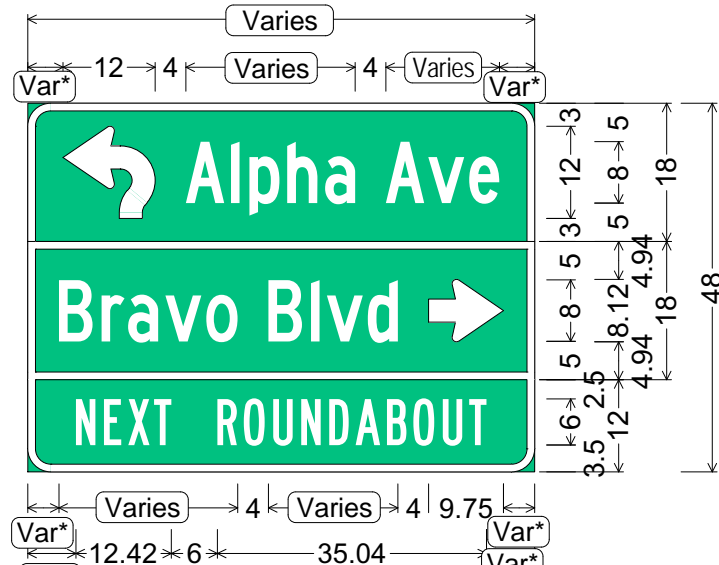

Var* 12.42 6 35.04 9.75 Var*
 Var* D3-2r (conventional road - 8" narrow);
 3.00" Radius, 1.00" Border, White on Green;
 90 Deg Advance Turn Arrow 12.00" X 12.00";
 "Alpha Ave" C 50% spacing;
 3.00" Radius, 1.00" Border, White on Green;
 "Bravo Blvd" C 50% spacing;
 Arrow 6" Type D1 - 9.75" 0°;
 3.00" Radius, 1.00" Border, White on Green;
 "NEXT ROUNDABOUT" B;

ALL DIMENSIONS ARE IN INCHES

	COLORS: LEGEND & BORDER - WHITE (REFL) BACKGROUND - GREEN (REFL)	ARIZONA DEPARTMENT OF TRANSPORTATION TRAFFIC ENGINEERING GROUP	
		DRAWN: R. C. MOEUR	DATE: NOVEMBER / 2015
	APPROVED: SIGNATURE ON FILE		