



NO	DESCRIPTION OF REVISIONS	DATE	MADE BY
1	2010 EDITION	03/10	C. COLE
2	CHANGED TYPE IV MOUNT TO TYPE V MOUNT (TEXT EDIT)	10/13	L. LOPEZ
	DESCRIPTION OF REVISIONS	DATE	MADE BY

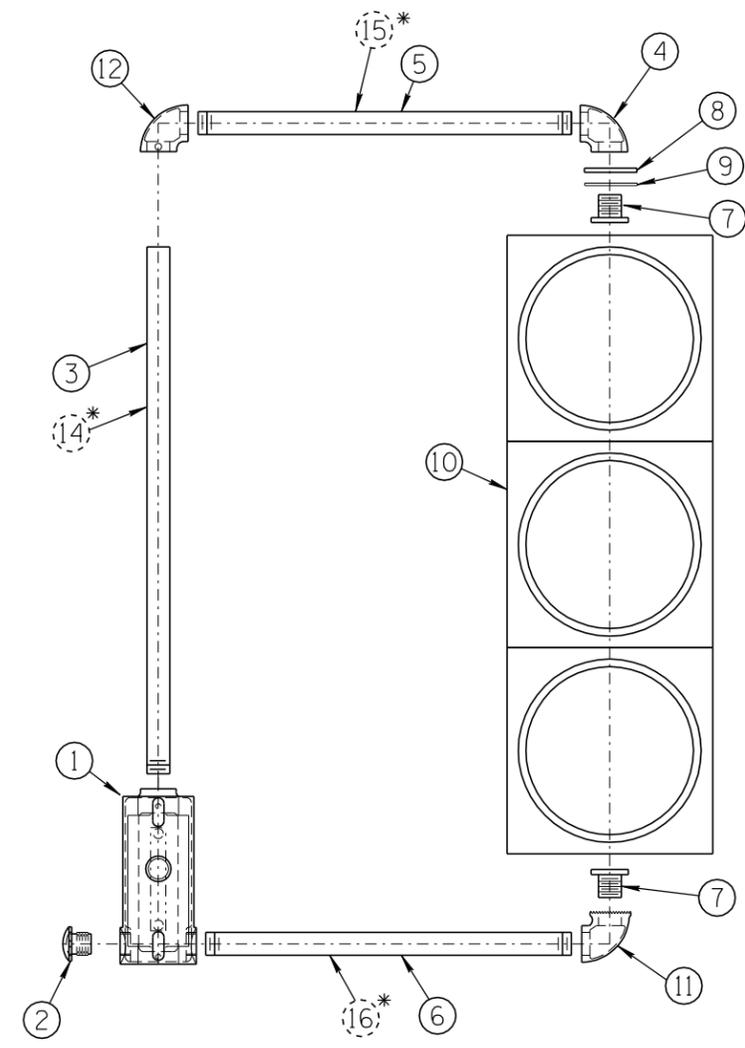

TYPE V MOUNT

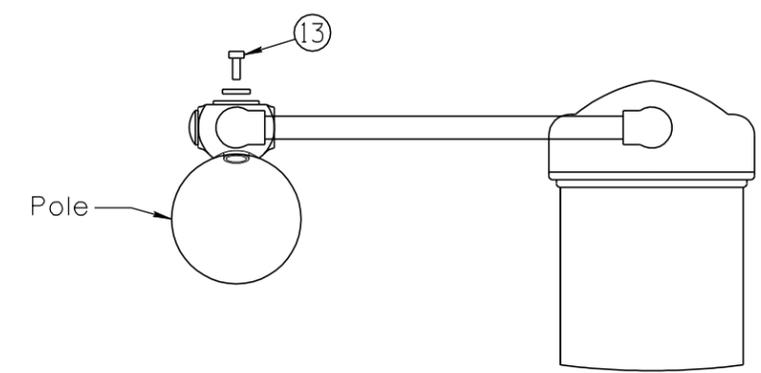

TYPICAL MOUNTING ORIENTATION PLAN
(See Notes 6 and 7 on T.S. 9-0)

LIST OF MATERIALS		
Item	Qty	Description
①	1	Terminal Compartment For Side Mounting (T.S. 10-4-1)
②	1	Ornamental Cap (See T.S. 10-1-6)
③	1	1 1/2" Pipe, See Length Table
④	1	1 1/2" Pipe, 90° Elbow
⑤	1	1 1/2" Pipe, (Typ) 24 1/2" Long
⑥	1	1 1/2" Pipe, (Typ) 24" Long
⑦	1	1 1/2" Lock Nipple, See Note No. 12, T.S. 9-0
⑧	1	Flat Washer
⑨	1	Neoprene Washer or Gasket
⑩	1	Signal, See Plans
⑪	1	90° Elbow With Locking Device (T.S. 10-1-2)
⑫	1	1 1/2" Pipe, 90° Elbow, Drill & Tap For Setscrew
⑬	2	1/2" x 2" Galvanized Steel Bolt 13-UNC With Flat Washer And Lock Washer
* ⑭	1	1 1/2" Pipe, (Typ) 9 1/2" Long For Pedestrian Signal, For Illuminated Message Units Use (Typ) 25 1/2" Long
* ⑮	2	1 1/2" Pipe, (Typ) 12 1/2" Long For Pedestrian Signals, Heads
* ⑯	1	1 1/2" Pipe, (Typ) 9 1/2" Long For Pedestrian Signal Heads

* Special Pipe Length For Use Only With Ped. Signal Single Head Units.

Table For Item ③ Only

Signal Face	C	Q	F/R	M	H	G
(Typ) Pipe Length	21"	61 1/2"	34 1/2"	34 1/2"	48"	48"

Threads On One End Only.



PLAN SYMBOLS

NOT TO SCALE

DESIGN APPROVED	ARIZONA DEPARTMENT OF TRANSPORTATION INTERMODAL TRANSPORTATION DIVISION TRAFFIC SIGNALS AND LIGHTING STANDARD DRAWINGS	REVISION 10/13
SIGNATURE		DRAWING NO. T.S. 9-3
APPROVED FOR DISTRIBUTION	TYPE V MOUNTING ASSEMBLY	SHEET NO. 1 OF 1
ON FILE		