




Mount A

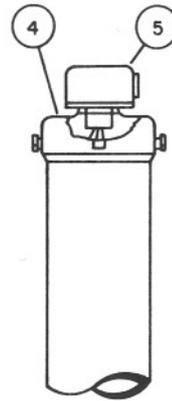

Mount B

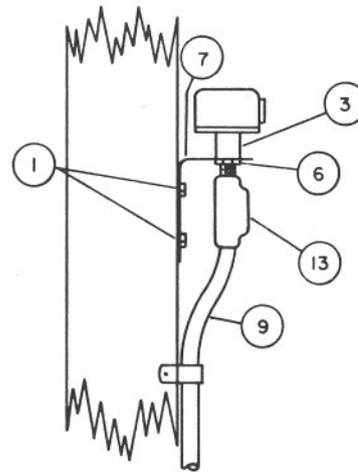

Mount C

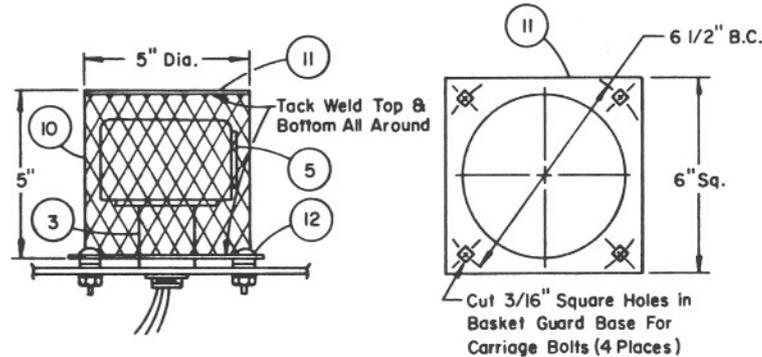

BASKET GUARD DETAIL

MATERIAL LIST

Item.	Qty.	Description
1	2	3/8" Lag Screw With Lock Washers
2	1	Photo Electric Cell Basket Guard (5" Dia.)
3	1	Mounting Receptacle, Locking Type
4	1	Pole Top Adapter With Locking Type Receptacle
5	1	Photo Electric Cell
6		Reducers And Connectors As Required
7	1	Mounting Bracket
8		Conduit Bushing
9		3/4" Rigid Galvanized Steel Conduit
10		1/2" No. 16 Carbon Steel Flattened Expanded Metal
11		1/16" Sheet Steel
12	4	(1) 3/16" x 3/4" Carriage Bolt, (3) Flat Washers, (1) Lock Washer, & (1) Hex Nut Per Fastening
13	1	3/4" Type C Conduit Fitting

NOTES:

1. Orient Photo Electric Cell to face North.
2. See Service Circuit Details for wiring. (T.S. 15-2 or T.S. 15-4.)
3. All conduit connections shall be watertight.
4. See the Specifications for Photo Electric Cell Specifications.

DESIGN APPROVED <i>Charles Brown</i> 7/24/85	STATE OF ARIZONA DEPARTMENT OF TRANSPORTATION DIVISION OF HIGHWAYS STANDARD DRAWINGS	REV.
APPROVED FOR DISTRIBUTION <i>[Signature]</i>	PHOTO ELECTRIC CELL MOUNTING DETAILS	DRAWING NO. T.S. 15-5