



NO	DESCRIPTION OF REVISIONS	MADE BY	DATE
1	RE-ISSUE	L. LOPEZ	2/02
2			
3			
4			

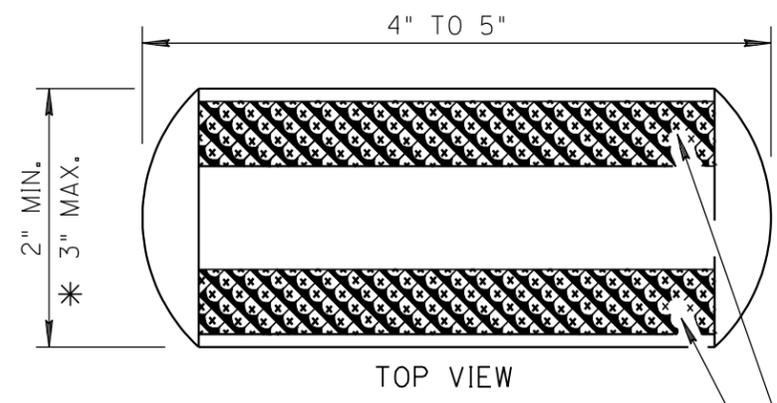


TOP VIEW

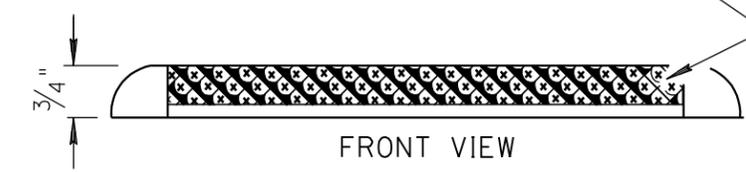


FRONT VIEW

TYPES C AND D

REFLECTIVE FACE (PRISMATIC REFLECTOR) WITH ABRASIVE RESISTANT COATING

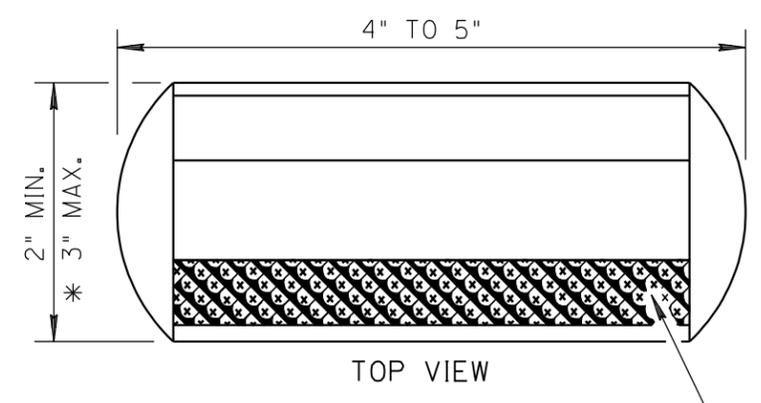

TOP VIEW

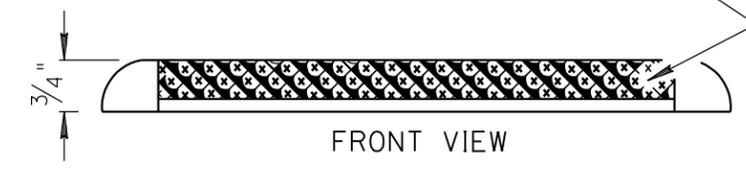


FRONT VIEW


TYPES G AND H

REFLECTIVE FACE (PRISMATIC REFLECTOR)

RECESSED PAVEMENT MARKERS

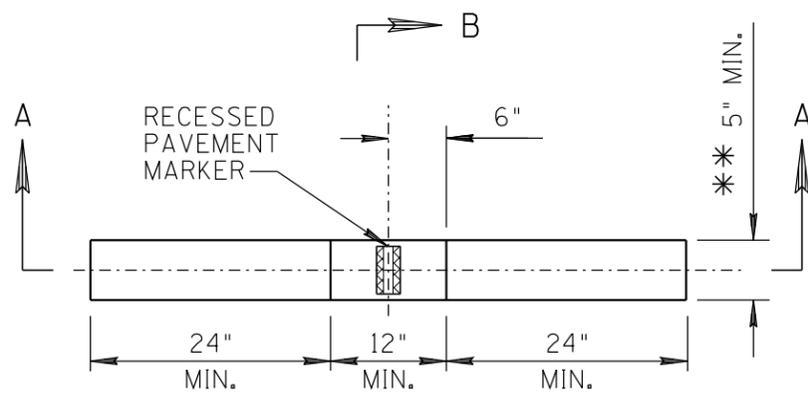


TYPES C AND D

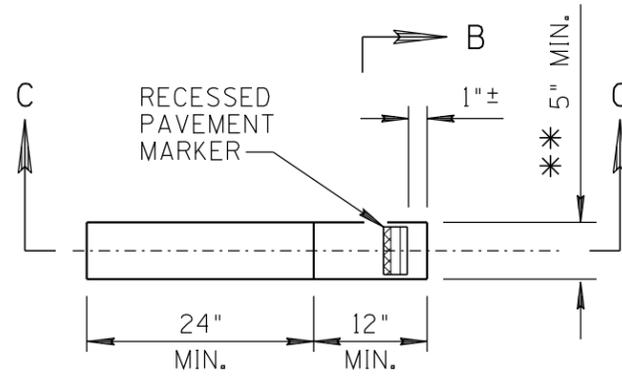


TYPES G AND H

NOTES:


1. SHAPE OF MARKER SHOWN IS FOR INFORMATION ONLY. THE ACTUAL CONFIGURATION OF MARKERS CAN VARY INCLUDING THE SHAPE AND TYPE OF REFLECTING SURFACE.
2. TYPE C (CLEAR ON ONE SIDE/RED ON ONE SIDE) MARKERS ARE REFLECTORIZED AND INTENDED FOR USE WITH ONE-WAY TRAFFIC AS ON RAMPS AND DIVIDED HIGHWAYS.
3. TYPE D (YELLOW ON BOTH SIDES) MARKERS ARE REFLECTORIZED AND INTENDED FOR USE WITH TWO-WAY TRAFFIC.
4. TYPE G (CLEAR ON ONE SIDE) MARKERS ARE REFLECTORIZED AND INTENDED FOR USE WITH ONE-WAY TRAFFIC.
5. TYPE H (YELLOW ON ONE SIDE) MARKERS ARE REFLECTORIZED AND INTENDED FOR USE WITH TWO-WAY TRAFFIC.
- *6. APPROVED CIRCULAR CERAMIC MARKERS 5 INCHES IN DIAMETER AND 1 INCH IN HEIGHT WITH A VERTICAL REFLECTIVE FACE(S) MAY ALSO BE USED, WITH CORRESPONDING INCREASES IN THE DEPTH OF THE PAVEMENT GROOVE.
- **7. DEPTH AND WIDTH OF GROOVE MAY HAVE TO BE ADJUSTED TO FIT PHYSICAL DIMENSIONS OF MARKER SELECTED.

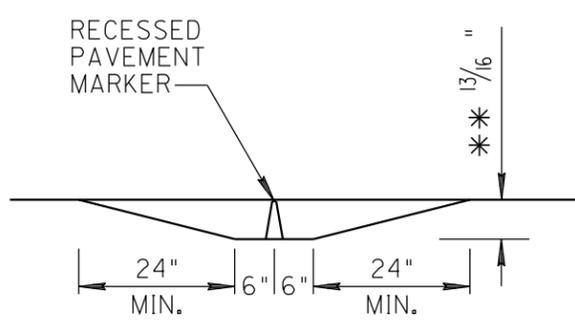

SECTION A-A



SECTION B-B

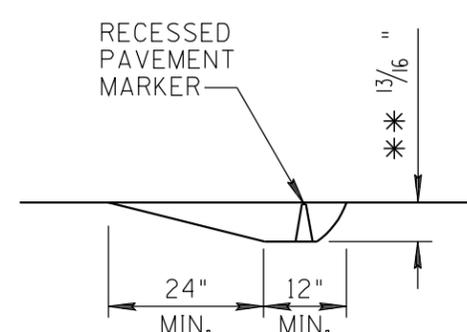

SECTION C-C

RECESS DETAILS

NOT TO SCALE

DESIGN APPROVED	ARIZONA DEPARTMENT OF TRANSPORTATION INTERMODAL TRANSPORTATION DIVISION STANDARD DRAWINGS	REV. 2/02
APPROVED FOR DISTRIBUTION		DRAWING NO. M-18