
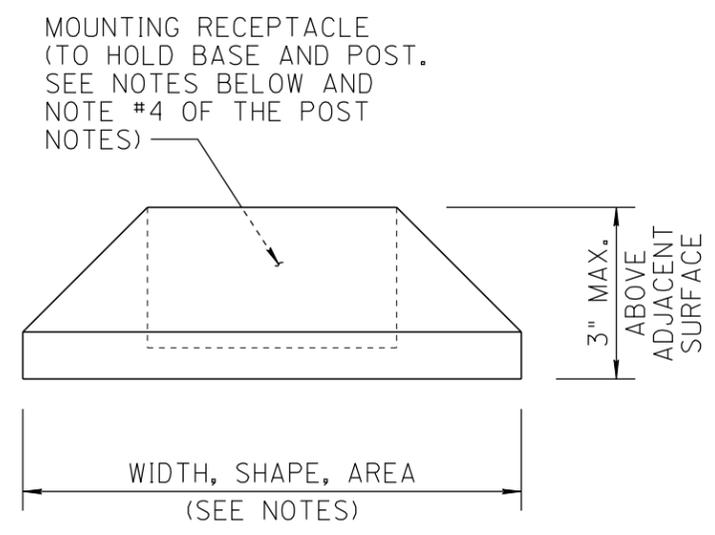


NO	DATE	MADE BY
1	07/09	L. LOPEZ
2		
3		
4		

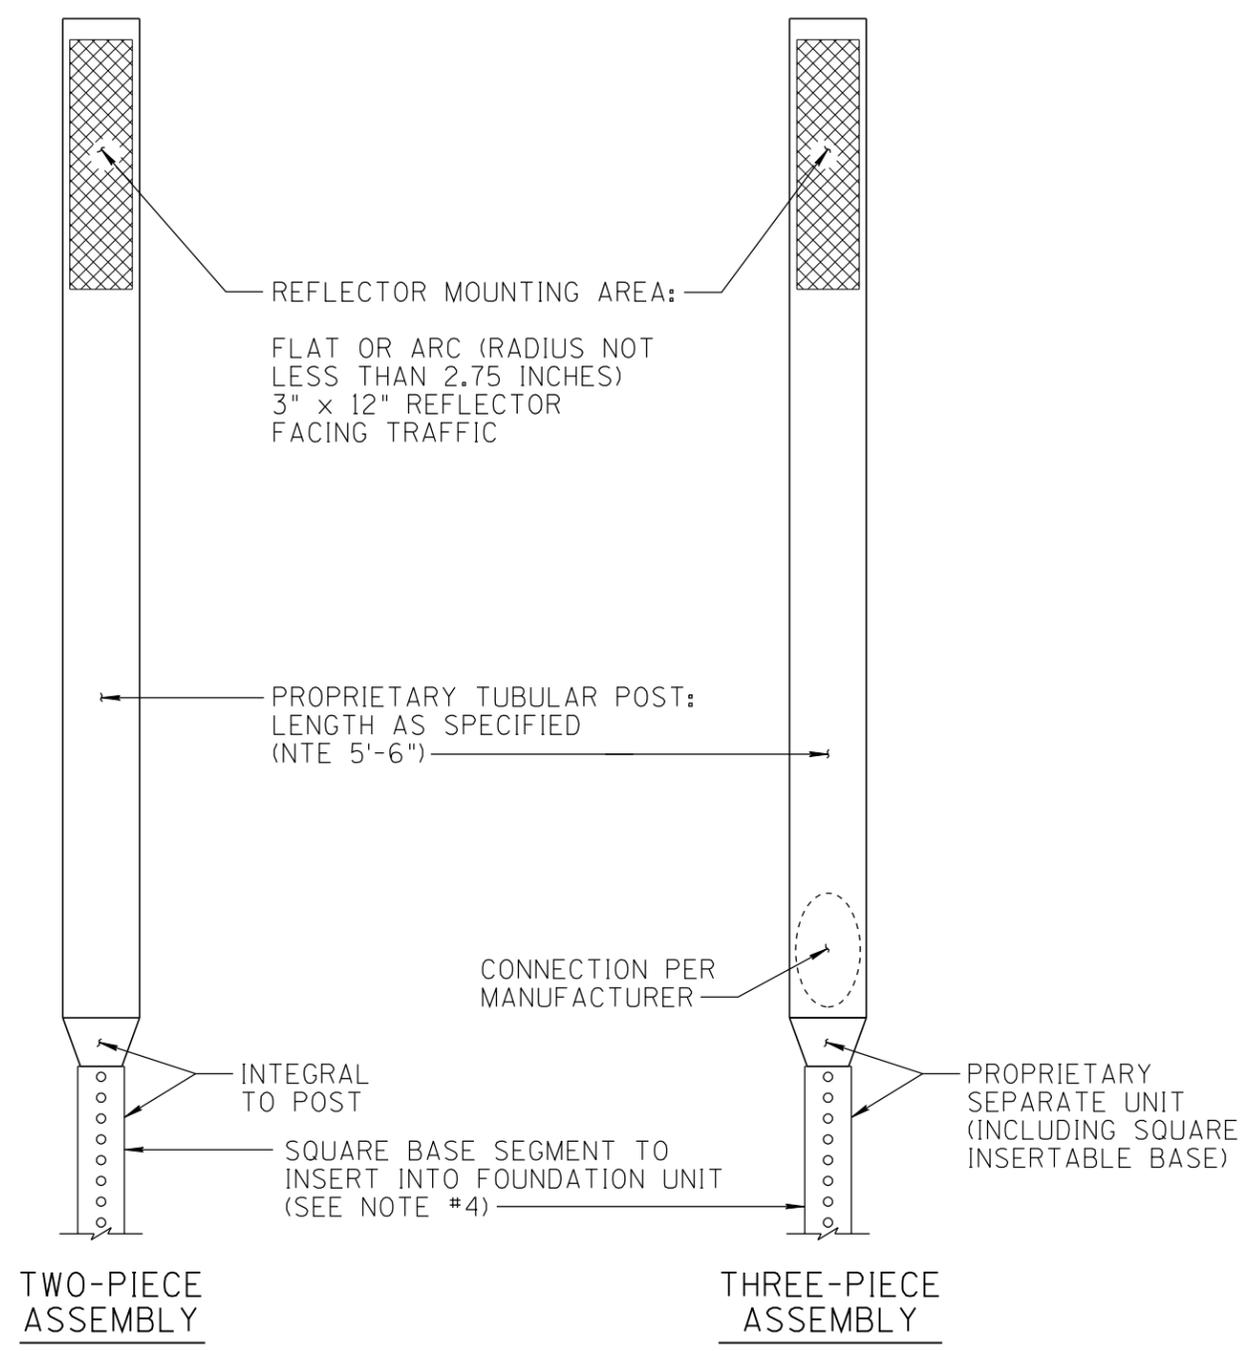

SURFACE MOUNT FOUNDATION UNIT
(HOLDS BASE SEGMENT OF 2-PIECE OR 3-PIECE ASSEMBLY)

NOTES:

1. RECEPTACLE SHAPE SHALL BE SQUARE OR PROPRIETARY WITH SQUARE PREFERRED.
2. FOUNDATION UNIT SHAPE SHALL BE PROPRIETARY.
3. FOUNDATION UNIT MATERIAL SHALL BE COMPATIBLE WITH ADHERING OR FASTENING TO ALL FORMS OF ASPHALTIC AND PORTLAND CEMENTITIOUS SURFACE MATERIAL USED BY ADOT.
4. ALL REQUIRED EPOXY ADHESIVES OR FASTENERS SHALL BE INCLUDED.
5. FOUNDATION UNIT MAXIMUM DIMENSION SHALL NOT EXCEED 15 INCHES.
6. FOUNDATION UNIT SHALL BE LARGER THAN OR EQUAL TO 40 SQUARE INCHES AND LESS THAN OR EQUAL TO 115 SQUARE INCHES.
7. FOUNDATION UNIT SHAPE MAY BE SQUARE, RECTANGULAR OR ROUNDED.
8. FOUNDATION UNIT LARGEST DIMENSION SHALL NOT BE GREATER THAN DOUBLE THE LEAST DIMENSION.
9. TWO-PIECE ASSEMBLY: POST WITH INTEGRAL BASE PLUS FOUNDATION UNIT.
10. THREE-PIECE ASSEMBLY: POST PLUS SEPARATE INSERTABLE BASE PLUS FOUNDATION UNIT.

POST NOTES:
(APPLICABLE TO ALL UNITS)

1. MINIMUM SIDEWALL THICKNESS SHALL BE 1/8 INCH.
2. SURFACE COLOR IS WHITE OR NEAR WHITE, UNLESS OTHERWISE SPECIFIED.
3. MUST MEET WARRANTY, UV-DURABILITY, STRIKE-DURABILITY AND ALL OTHER SPECIFIED REQUIREMENTS.
4. WHERE SURFACE MOUNTING IS REQUIRED, INSERTABLE BASE AND SURFACE MOUNT FOUNDATION MAY USE A PROPRIETARY "MATING" (RECEPTACLE) SHAPE.

FLEXIBLE DELINEATOR POSTS

FOUNDATION UNIT (NOT SHOWN)
SEE STD DRAWING M-37

NOT TO SCALE

DESIGN APPROVED	ARIZONA DEPARTMENT OF TRANSPORTATION INTERMODAL TRANSPORTATION DIVISION TRAFFIC SIGNING & MARKING STANDARD DRAWINGS	REVISION 07/09
APPROVED FOR DISTRIBUTION		DRAWING NO. M-36
FLEXIBLE DELINEATOR ASSEMBLIES		SHEET NO. 1 OF 1